

The SAR-Guidebook

Examples based on SARscape®



Introduction

The aim of this tutorial is to introduce beginners to land applications based on spaceborne Synthetic Aperture Radar (SAR). It is intended to give users a basic understanding of SAR technology, the main steps involved in the processing of SAR data, and the type of information that may be obtained from SAR images.




Note that this tutorial is based on an introductory course developed by sarmap in collaboration with the UNESCO BILKO group and financed by the European Space Agency. With respect to the original one, it has been extended (to Polarimetry and Polarimetric SAR Interferometry) and adapted to introduce the use of SARscape[®].




Using the module navigation tools

The navigation tools at the bottom left of the pages and to the top right are intended to help you move around between slides as easily as possible.

Bottom left navigation

-  Takes you to the main content slide; particularly useful for navigating around the theory section of the module
-  Takes you to the previous slide in the series
-  Takes you to the next slide in the series

Top right navigation

-  Takes you to the slide indicated by the adjacent entry in the contents list



Credits

For the preparation of this Tutorial, documents of the following institutions/companies have been used:

- Alaska SAR Facility
- Atlantis Scientific Inc.
- European Space Agency
- InfoSAR Limited
- Japan Aerospace Exploration Agency
- Radarsat International
- TeleRilevamento Europa
- University of Innsbruck, Institute for Meteorology & Geophysics
- University of Nottingham
- University of Pavia
- University of Trento, Remote Sensing Laboratory
- University of Zurich, Remote Sensing Laboratory
- US Geological Survey



Acronyms

| | |
|--------|---|
| ASAR | Advanced SAR |
| ASI | Agenzia Spaziale Italiana |
| DEM | Digital Elevation Model |
| DESCW | Display Earth remote sensing Swath Coverage for Windows |
| DInSAR | Differential Interferometric SAR |
| DLR | Deutsches Zentrum für Luft- und Raumfahrt |
| DORIS | Doppler Orbitography and Radiopositioning Integrated by Satellite |
| ENL | Equivalent Number of Looks |
| EOLI | Earthnet On-Line Interactive |
| ESA | European Space Agency |
| GCP | Ground Control Point |
| InSAR | Interferometric SAR |
| JAXA | Japan Aerospace Exploration Agency |
| JPL | Jet Propulsion Laboratory |
| NASA | National Aeronautics and Space Administration |
| PAF | Processing and Archiving Facility |
| PDF | Probability Density Function |



Acronyms

| | |
|----------|----------------------------------|
| PolSAR | Polarimetric SAR |
| PolInSAR | Polarimetric Interferometric SAR |
| PRF | Pulse Repetition Frequency |
| RADAR | Radio Detection And Ranging |
| RAR | Real Aperture Radar |
| SAR | Synthetic Aperture Radar |
| SIR | Shuttle Imaging Radar |
| SLC | Single Look Complex |
| SRTM | Shuttle Radar Terrain Mission |
| UTM | Universal Transfer Mercator |
| WGS | World Geodetic System |



Symbols

| | |
|------------------|--|
| A | Amplitude |
| β° | Beta Nought |
| c | Speed of Light |
| ϕ | Phase Difference |
| f_D | Doppler Frequency |
| I | Intensity |
| P_d | Received Power for Distributed Targets |
| P_t | Transmitted Power |
| P | Power |
| L | Number of Looks |
| λ | Wavelength |
| σ° | Backscattering Coefficient or Sigma Nought |
| θ | Incidence Angle |
| τ | Pulse Duration |



Table of Contents

- ▶ 1. What is Synthetic Aperture Radar (SAR)?
- ▶ 2. How SAR products are generated
- ▶ 3. Appropriate land applications
- ▶ 4. Operational and future spaceborne SAR sensors
- ▶ 5. Glossary
- ▶ 6. References

1. What is Synthetic Aperture Radar (SAR)?


- ▶ 1.1 The System
- ▶ 1.2 Specific Parameters
- ▶ 1.3 Acquisition Modes
- ▶ 1.4 Scattering Mechanisms
- ▶ 1.5 Speckle
- ▶ 1.6 Data Statistics
- ▶ 1.7 Geometry



1.1 The System

Radar Imaging

Imaging radar is an active illumination system. An antenna, mounted on a platform, transmits a radar signal in a side-looking direction towards the Earth's surface. The reflected signal, known as the echo, is backscattered from the surface and received a fraction of a second later at the same antenna (monostatic radar).

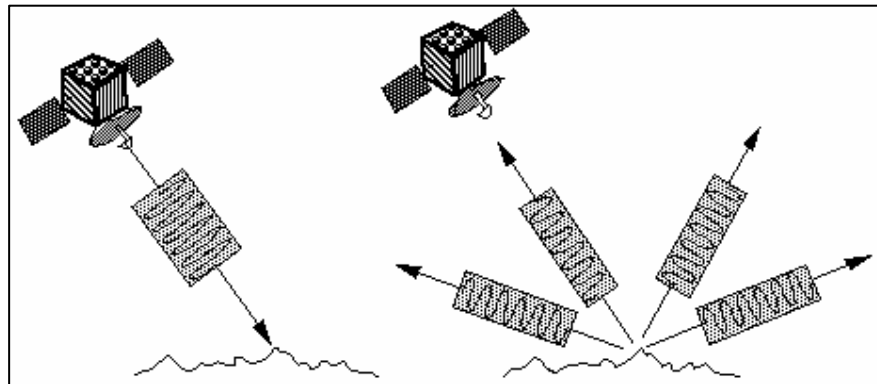

For coherent radar systems such as Synthetic Aperture Radar (SAR), the amplitude and the phase of the received echo - which are used during the focusing process to construct the image - are recorded.





1.1 The System

SAR versus other Earth Observation Instruments


| | Lidar | Optical Multi-Spectral | SAR |
|-------------------------|-------------------|-------------------------------|-----------------------|
| Platform | airborne | airborne/spaceborne | airborne/spaceborne |
| Radiation | own radiation | reflected sunlight | own radiation |
| Spectrum | infrared | visible/infrared | microwave |
| Frequency | single frequency | multi-frequency | multi-frequency |
| Polarimetry | N.A. | N.A. | polarimetric phase |
| Interferometry | N.A. | N.A. | interferometric phase |
| Acquisition time | day/night | day time | day/night |
| Weather | blocked by clouds | blocked by clouds | see through clouds |





1.1 The System

Real Aperture Radar (RAR) - Principle

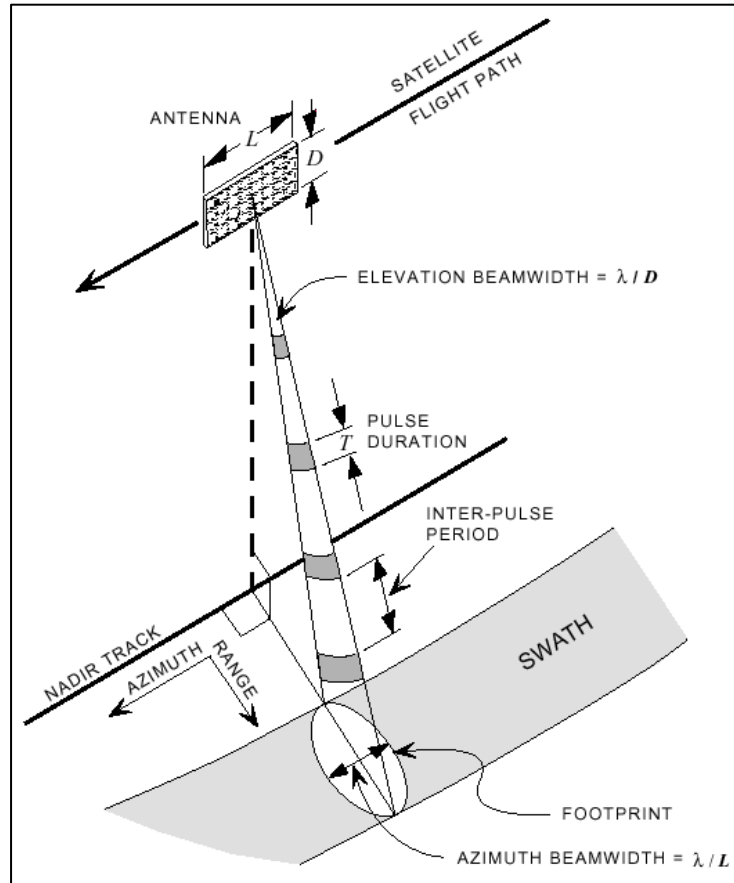

Aperture means the opening used to collect the reflected energy that is used to form an image. In the case of radar imaging this is the antenna.

For RAR systems, only the amplitude of each echo return is measured and processed.





1.1 The System

Real Aperture Radar - Resolution

The spatial resolution of RAR is primarily determined by the size of the antenna used: the larger the antenna, the better the spatial resolution. Other determining factors include the pulse duration (τ) and the antenna beamwidth.

Range resolution is defined as

$$res_{range} = \frac{c \tau}{2}$$

where c is the speed of light.

Azimuth resolution is defined as

$$res_{azimuth} = \frac{\lambda R}{L}$$

where L is the antenna length, R the distance antenna-object, and λ the wavelength. For systems where the antenna beamwidth is controlled by the physical length of the antenna, typical resolutions are in the order of several kilometres.






1.1 The System

Synthetic Aperture Radar - Principle

SAR takes advantage of the Doppler history of the radar echoes generated by the forward motion of the spacecraft to synthesise a large antenna (see Figure). This allows high azimuth resolution in the resulting image despite a physically small antenna. As the radar moves, a pulse is transmitted at each position. The return echoes pass through the receiver and are recorded in an echo store.

SAR requires a complex integrated array of onboard navigational and control systems, with location accuracy provided by both Doppler and inertial navigation equipment. For sensors such as ERS-1/2 SAR and ENVISAT ASAR, orbiting about 900km from the Earth, the area on the ground covered by a single transmitted pulse (footprint) is about 5 km long in the along-track (azimuth) direction.

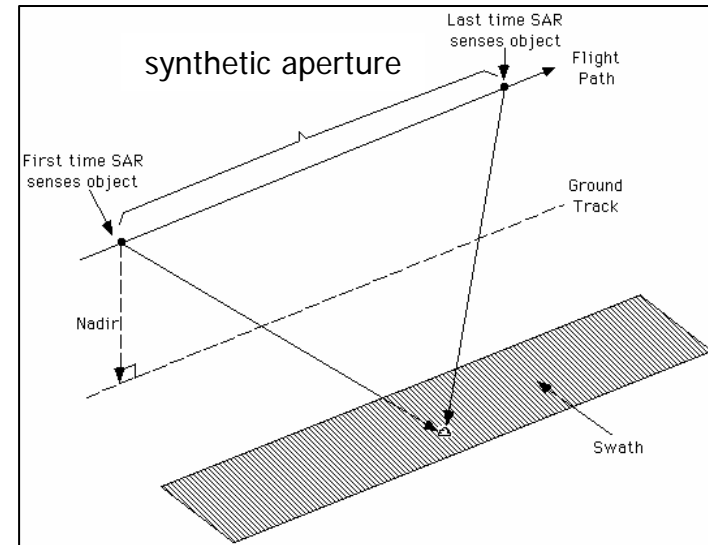




1.1 The System

Synthetic Aperture Radar - Range Resolution

The range resolution of a pulsed radar system is limited fundamentally by the bandwidth of the transmitted pulse. A wide bandwidth can be achieved by a short duration pulse. However, the shorter the pulse, the lower the transmitted energy and the poorer the radiometric resolution. To preserve the radiometric resolution, SAR systems generate a long pulse with a linear frequency modulation (or chirp).

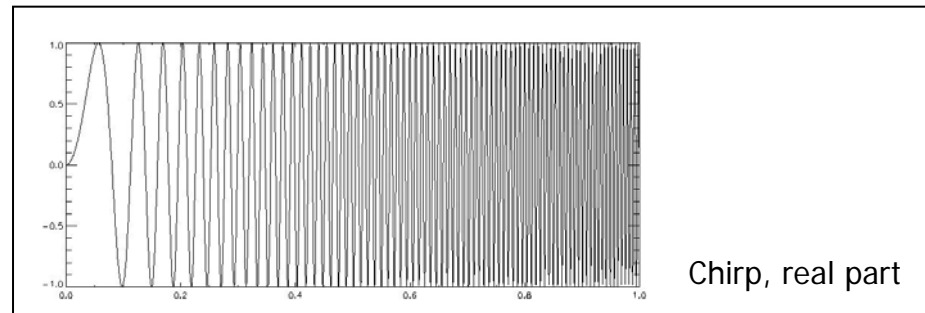

After the received signal has been compressed, the range resolution is optimised without loss of radiometric resolution.





1.1 The System

Synthetic Aperture Radar - Azimuth Resolution

Compared to RAR, SAR synthetically increases the antenna's size to increase the azimuth resolution though the same pulse compression technique as adopted for range direction. Synthetic aperture processing is a complicated data processing of received signals and phases from moving targets with a small antenna, the effect of which is to should be theoretically convert to the effect of a large antenna, that is a synthetic aperture length, i.e. the beam width by range which a RAR of the same length, can project in the azimuth direction. The resulting azimuth resolution is given by half of real aperture radar as shown as follows:

- Real beam width $\beta = \lambda / D$
- Real resolution $\Delta L = \beta \cdot R = L_s$ (synthetic aperture length)
- Synthetic beam width $\beta_s = \lambda / 2 \cdot L_s = D / (2 \cdot R)$
- Synthetic resolution $\Delta L_s = \beta_s \cdot R = D / 2$

where λ is the wavelength, D the radar aperture, and R the distance antenna-object (refer to the Figure on the next page).


This is the reason why SAR has a high azimuth resolution with a small size of antenna regardless of the slant range, or very high altitude of a satellite.





1.1 The System

Synthetic Aperture Radar - Azimuth Resolution

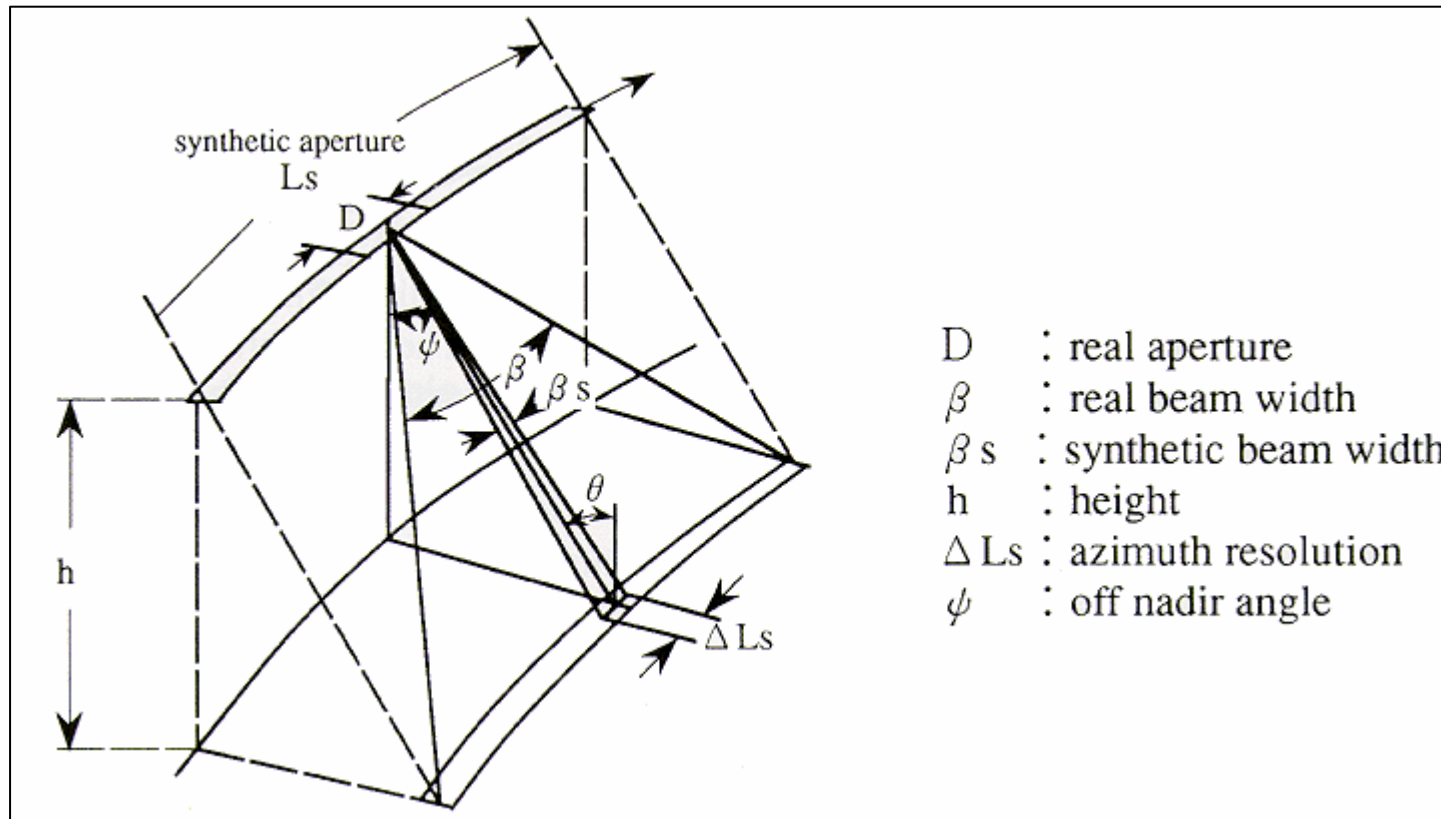

- D : real aperture
- β : real beam width
- β_s : synthetic beam width
- h : height
- ΔL_s : azimuth resolution
- ψ : off nadir angle





1.2 Specific Parameters

Wavelength

Radio waves are the part of the electromagnetic spectrum that have wavelengths considerably longer than visible light, i.e. in the centimetre domain. Penetration is the key factor for the selection of the wavelength: the longer the wavelength (smaller the frequency) the stronger the penetration into vegetation and soil. Following wavelengths are in general used:

- P-band = ~ 65 cm AIRSAR
- L-band = ~ 23 cm JERS-1 SAR, ALOS PALSAR
- S-band = ~ 10 cm Almaz-1
- C-band = ~ 5 cm ERS-1/2 SAR, RADARSAT-1/2, ENVISAT ASAR, RISAT-1
- X-band = ~ 3 cm TerraSAR-X-1, COSMO-SkyMed
- K-band = ~ 1.2 cm Military domain






1.2 Specific Parameters

Polarization

Irrespective of wavelength, radar signals can transmit horizontal (H) or vertical (V) electric-field vectors, and receive either horizontal (H) or vertical (V) return signals, or both. The basic physical processes responsible for the like-polarised (HH or VV) return are quasi-specular surface reflection. For instance, calm water (i.e. without waves) appears black. The cross-polarised (HV or VH) return is usually weaker, and often associated with different reflections due to, for instance, surface roughness.

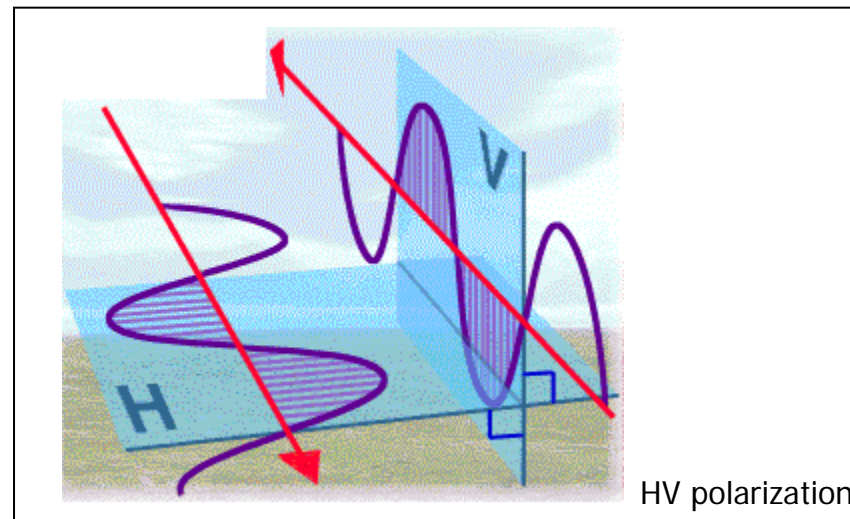




1.2 Specific Parameters

Incidence Angle

The incidence angle (θ) is defined as the angle formed by the radar beam and a line perpendicular to the surface. Microwave interactions with the surface are complex, and different reflections may occur in different angular regions. Returns are normally strong at low incidence angles and decrease with increasing incidence angle (see Figure).

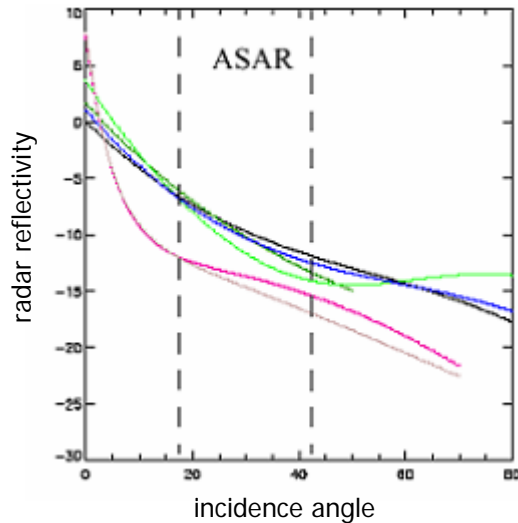

The plot shows the radar reflectivity variation for different land cover classes (colours), while the dashed lines highlight the swath range for ENVISAT ASAR data.

Note that this angular dependence of the radar backscatter can be exploited, by choosing an optimum configurations for different applications.






1.3 Acquisition Modes

Stripmap Mode - Principle

When operating as a Stripmap SAR, the antenna usually gives the system the flexibility to select an imaging swath by changing the incidence angle.

Note that the Stripmap Mode is the most commonly used mode. In the case of ERS-1/2 SAR and JERS-1 SAR the antenna was fixed, hence disabling selection of an imaging swath. The latest generation of SAR systems - like RADARSAT-1/2, ENVISAT ASAR, ALOS PALSAR, TerraSAR-X-1, COSMO-SkyMed, and RISAT-1 - provides for the selection of different swath modes.

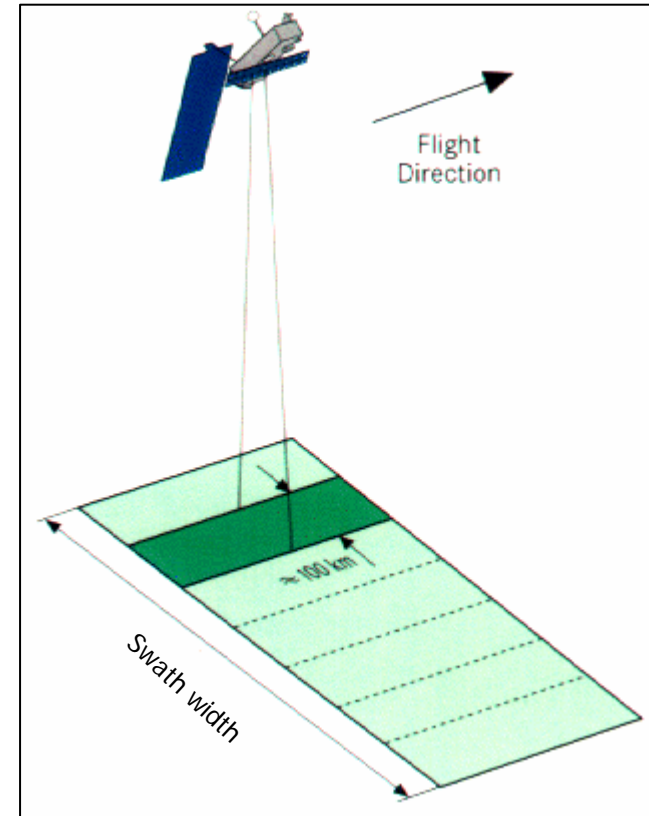




1.3 Acquisition Modes

ScanSAR Mode - Principle

While operating as a Stripmap SAR, the system is limited to a narrow swath. This constraint can be overcome by utilising the ScanSAR principle, which achieves swath widening by the use of an antenna beam which is electronically steerable in elevation.

Radar images can then be synthesised by scanning the incidence angle and sequentially synthesising images for the different beam positions. The area imaged from each particular beam is said to form a sub-swath. The principle of the ScanSAR is to share the radar operation time between two or more separate sub-swaths in such a way as to obtain full image coverage of each.

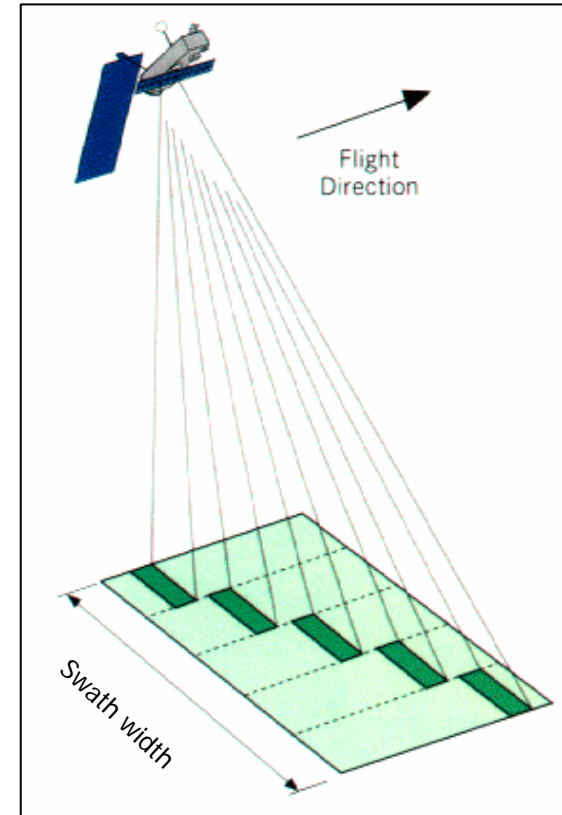




1.3 Acquisition Modes

Spotlight Mode - Principle

During a Spotlight mode data collection, the sensor steers its antenna beam to continuously illuminate the terrain patch being imaged.

Three attributes distinguish Spotlight and Stripmap mode:

- Spotlight mode offers finer azimuth resolution than achievable in Stripmap mode using the same physical antenna.
- Spotlight imagery provides the possibility of imaging a scene at multiple viewing angles during a single pass.
- Spotlight mode allows efficient imaging of multiple smaller scenes whereas Stripmap mode naturally images a long strip of terrain.

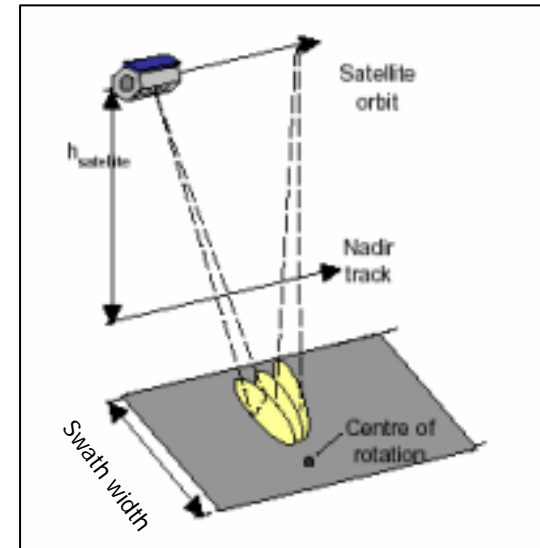




1.4 Scattering Mechanisms

General

SAR images represent an estimate of the radar backscatter for that area on the ground. Darker areas in the image represent low backscatter, while brighter areas represent high backscatter. Bright features mean that a large fraction of the radar energy was reflected back to the radar, while dark features imply that very little energy was reflected.

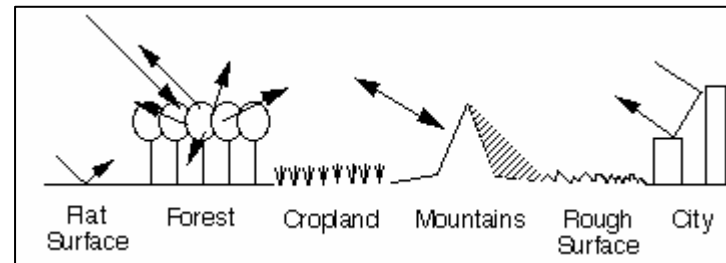

Backscatter for a target area at a particular wavelength will vary for a variety of conditions, such as the physical size of the scatterers in the target area, the target's electrical properties and the moisture content, with wetter objects appearing bright, and drier targets appearing dark. (The exception to this is a smooth body of water, which will act as a flat surface and reflect incoming pulses away from the sensor. These bodies will appear dark). The wavelength and polarisation of the SAR pulses, and the observation angles will also affect backscatter.






1.4 Scattering Mechanisms


Surface and Volume Scattering

A useful rule-of-thumb in analysing radar images is that the higher or brighter the backscatter on the image, the rougher the surface being imaged. Flat surfaces that reflect little or no radio or microwave energy back towards the radar will always appear dark in radar images.

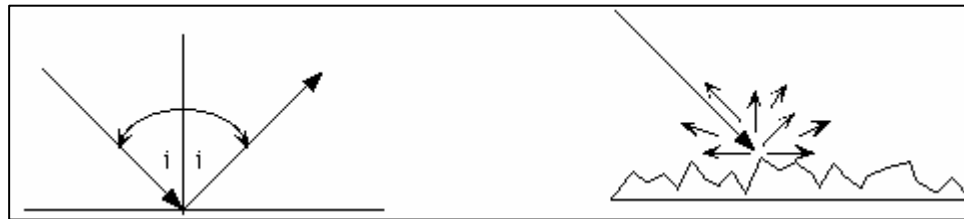

Surface Scattering

Vegetation is usually moderately rough on the scale of most radar wavelengths and appears as grey or light grey in a radar image.




Volume Scattering



1.4 Scattering Mechanisms

Double Bounce

Surfaces inclined towards the radar will have a stronger backscatter than surfaces which slope away from the radar and will tend to appear brighter in a radar image. Some areas not illuminated by the radar, like the back slope of mountains, are in shadow, and will appear dark.

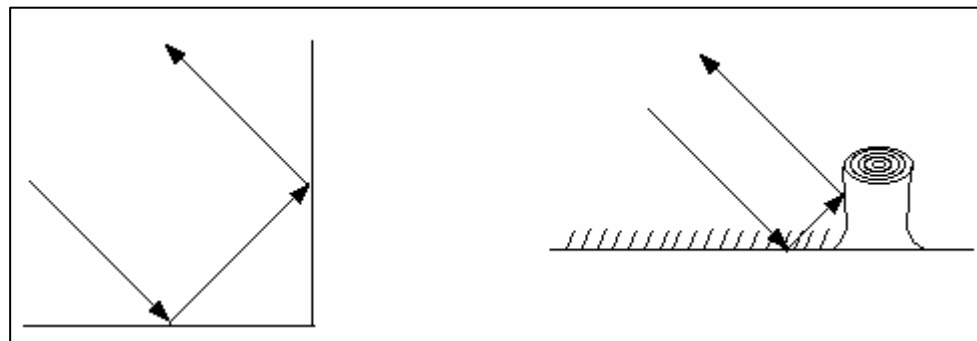

Double Bounce


When city streets or buildings are lined up in such a way that the incoming radar pulses are able to bounce off the streets and then bounce again off the buildings (called a double-bounce) and directly back towards the radar they appear very bright (white) in radar images. Roads and freeways are flat surfaces and so appear dark. Buildings which do not line up so that the radar pulses are reflected straight back will appear light grey, like very rough surfaces.



1.4 Scattering Mechanisms

Combination of Scattering Mechanisms


It is worth mentioning - in particular for low frequency (like L- or P-band) SAR systems - that the observed radar reflectivity is the integration of single scattering mechanisms - such as surface (σ_s), volume (σ_v), and double bounce (σ_t) scattering - as shown, as example for forestry, in the Figure. Note that, a theoretical modelling (usually based on the radiative transfer theory) of the radar backscatter is very complex and, thereby, simplifications of the target and assumptions on the basic scattering processes must be done.

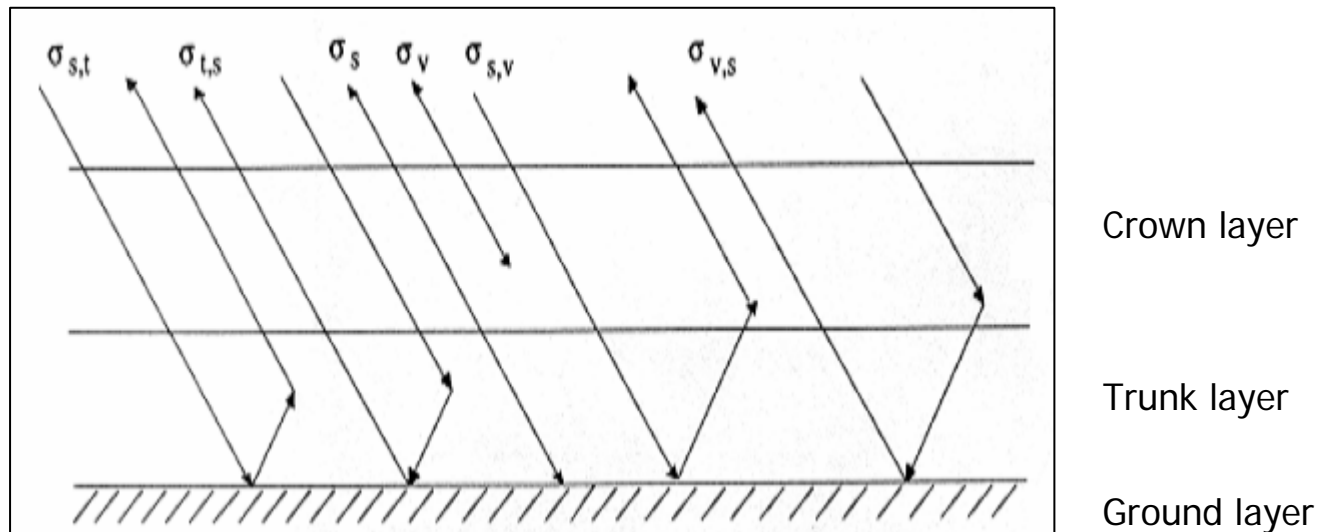



1.4 Scattering Mechanisms

An Example

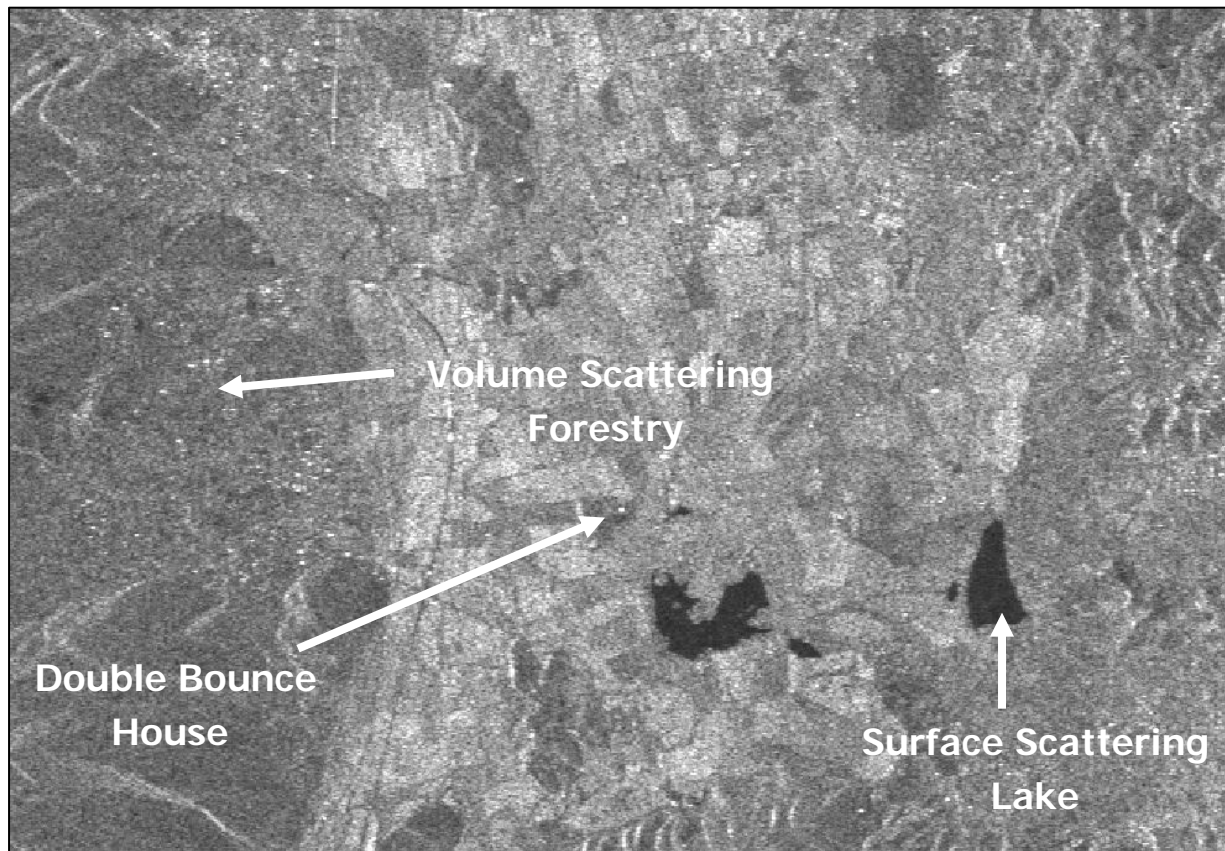


ERS-1 SAR (C-band) sample (ca. 17 km x 10 km)





1.4 Scattering Mechanisms

Penetration

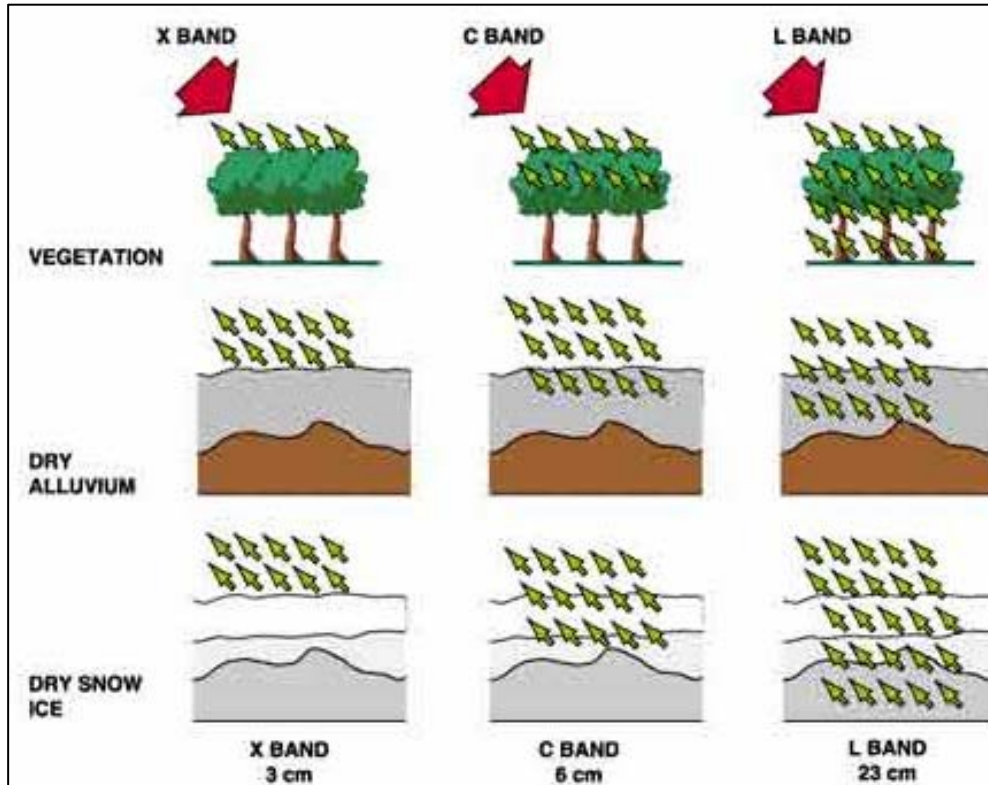

Depending on the frequency and polarization, waves can penetrate into the vegetation and, on dry conditions, to some extent, into the soil (for instance dry snow or sand). Generally, the longer the wavelength, the stronger the penetration into the target is. With respect to the polarization, cross-polarized (VH/HV) acquisitions have a significant less penetration effect than co-polarized (HH/VV) ones.



1.4 Scattering Mechanisms

Dielectric Properties

Radar backscatter also depends on the dielectric properties of the target: for metal and water the dielectric constant is high (80), while for most other materials it is relatively low: in dry conditions, the dielectric constant ranges from 3 to 8. This means that wetness of soils or vegetated surfaces can produce a notable increase in radar signal reflectivity.

Based on this phenomenon, SAR systems are also used to retrieve the soil moisture content - primarily - of bare soils. The measurement is based on the large contrast between the dielectric properties of dry and wet soils. As the soil is moistened, its dielectric constant varies from approximately 2.5 when dry to about 25 to 30 under saturated conditions. This translates to an increase in the reflected energy. It is worth mentioning that the inference of soil moisture from the backscattering coefficient is feasible but limited to the use of polarimetric and dual frequency (C-, L-band) SAR sensors, in order to separate the effect of soil roughness and moisture.






1.5 Speckle

General

Speckle refers to a noise-like characteristic produced by coherent systems such as SAR and Laser systems (note: Sun's radiation is not coherent). It is evident as a random structure of picture elements (pixels) caused by the interference of electromagnetic waves scattered from surfaces or objects. When illuminated by the SAR, each target contributes backscatter energy which, along with phase and power changes, is then coherently summed for all scatterers, so called random-walk (see Figure). This summation can be either high or low, depending on constructive or destructive interference. This statistical fluctuation (variance), or uncertainty, is associated with the brightness of each pixel in SAR imagery.

When transforming SAR signal data into actual imagery - after the focusing process - multi-look processing is usually applied (so called non-coherent averaging). The speckle still inherent in the actual SAR image data can be reduced further through adaptive image restoration techniques (speckle filtering). Note that unlike system noise, speckle is a real electromagnetic measurement, which is exploited in particular in SAR interferometry (InSAR).

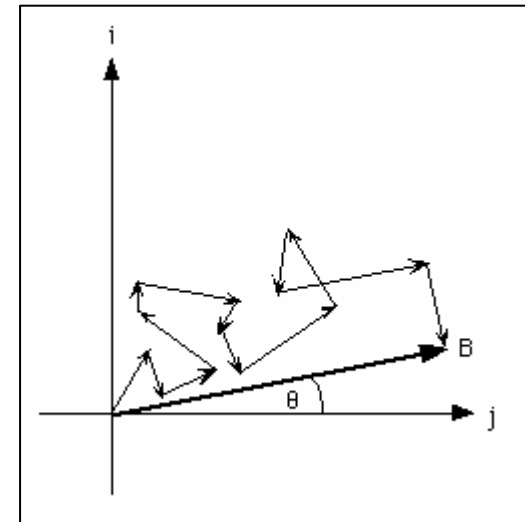



1.5 Speckle

Speckle Model and Speckle Filtering Principle

A well accepted appropriate model for fully developed speckle is the multiplicative fading random process F ,

$$I = R \cdot F$$

where I is the observed intensity (speckle observed reflectivity), R is the random radar reflectivity process (unspeckle reflectivity).

The first step in speckle filtering is to check if speckle is fully developed in the neighbourhood of the pixel considered. If this is the case, an estimation of the radar reflectivity is made as a function of the observed intensity, based on some local statistics and of some a priori knowledge about the scene. Good speckle removal requires the use of large processing windows. On the contrary, good preservation of the spatial resolution is needed so as not to blur thin image details like textural or structural features.

In high spatial resolution images, speckle can be partially developed in some areas (e.g. urban), when a few strong scatters are present in the resolution cell. In the extreme case of an isolated point target, intensity fluctuations are dominated by a deterministic function which should not be affected by the speckle filtering process. In these cases, small window sizes are preferable.





1.5 Speckle

Speckle Model and Speckle Filtering Principle (cont.)

A speckle filtering is therefore a compromise between speckle removal (radiometric resolution) and thin details preservation (spatial resolution).

Adaptive filters based on appropriate scene and speckle models are the most appropriate ones for high spatial resolution SAR images, when speckle is not always fully developed. Generally, such filters are all adaptive as a function of the local coefficient of variation and can be enhanced by fixing a minimum value for better speckle smoothing and an upper limit for texture or point target preservation. The coefficient of variation (e.g. mean/standard deviation) is a good indicator of the presence of heterogeneity within a window. It is well adapted when only isotropic (homogeneous) texture is present and can be assisted by ratio operators for anisotropic oriented textural features.

Enhanced speckle filters also include the possibility that the coefficient of variation is assisted by geometrical detectors, and that the ratio detector is extended to the detection of linear features and isolated scatterers.






1.6 Data Statistics

Single Look Complex, Amplitude, Intensity (Power) Data

SAR data are composed of a real and imaginary part (complex data), so-called in-phase and quadrature channels (see Figure).

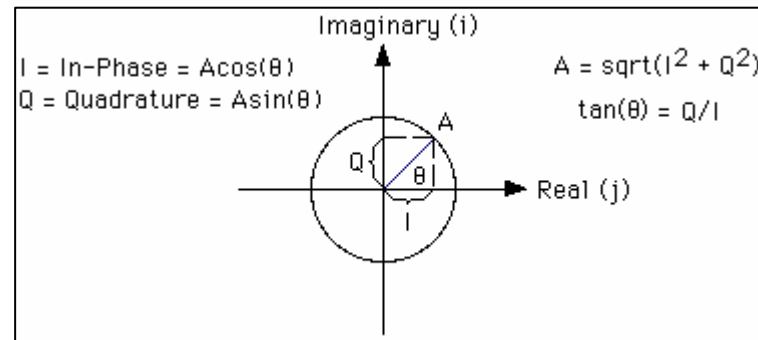

Note that the phase of a single-channel SAR system (for example C-band, VV polarization) is uniformly distributed over the range $-\pi$ to $+\pi$. In contrast, the amplitude A has a Rayleigh distribution, while the Intensity I (or Power P) = A^2 has a negative exponential distribution.

In essence: In single-channel SAR systems (not to be confused with the InSAR, DInSAR, PolSAR, and PolInSAR case) phase provides no information, while Amplitude (or Intensity/Power) is the only useful information.






1.6 Data Statistics

Intensity (or Power) Data

SAR data - after the focusing process - are usually multi-looked by averaging over range and/or azimuth resolution cells - the so-called incoherent averaging. Fortunately even multi-looked Intensity data have a well-known analytic Probability Density Function: In fact, a L -look image (L is the number of looks) is essentially the convolution of L -look exponential distributions (see Figure).

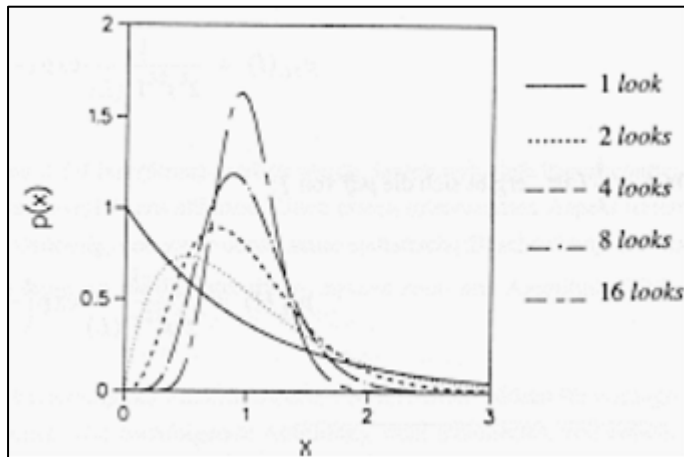

An important characteristic are the moments (expected mean and variance) of the Gamma function (a statistical function closely related to factorials) for an homogeneous area, i.e.

$$\text{mean} = 2 \cdot (\text{standard deviation})^2$$

$$\text{variance} = 4 \cdot (\text{standard deviation})^4 / L$$

This motivates the definition of the Equivalent Number of Looks (ENL) as

$$\text{ENL} = \text{mean}^2 / \text{variance}$$

The ENL is equivalent to the number of independent Intensity / values averaged per pixel.





1.7 Geometry

General

Due to the completely different geometric properties of SAR data in range and azimuth direction, it is worth considering them separately to understand the SAR imaging geometry. According to its definition, distortions in range direction are large. They are mainly caused by topographic variations. The distortions in azimuth are much smaller but more complex.

Geometry in Range

The position of a target is a function of the pulse transit time between the sensor and the target on the Earth's surface. Therefore it is proportional to the distance between sensor and target. The radar image plane (see figure included in the next slide) can be thought of as any plane that contains the sensor's flight track. The projection of individual object points onto this plane, the so-called slant range plane, is proportional to the sensor distance, and causes a non-linear compression of the imaged surface information.






1.7 Geometry

Geometry in Range (cont.)

The points a , b , and c are imaged as a' , b' , and c' in the slant range plane (see figure). This shows how minor differences in elevation can cause considerable range distortions. These relief induced effects are called foreshortening, layover and shadow.

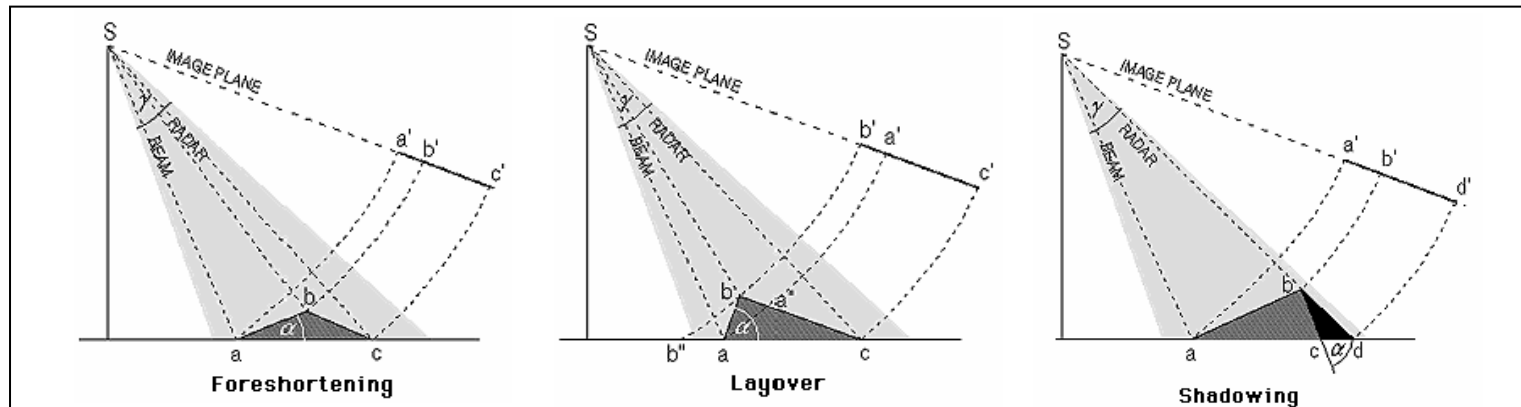

Layover is an extreme case of foreshortening, where the slope α is bigger than the incidence angle (θ). With an increasing (horizontal) distance, the slant range between sensor and target decreases.

Shadow is caused by objects, which cover part of the terrain behind them.






1.7 Geometry

Geometry in Range (cont.) - An Example

In mountainous areas, SAR images are i) generally strongly geometrically distorted, and, ii) from a radiometric point of view, SAR facing slopes appear very bright (see Figure). Steeper topography or smaller incidence angles - as in the case of ERS-1/2 SAR - can worsen foreshortening effects.

Note that foreshortening effects can be corrected during the geometric and radiometric calibration assuming the availability of high resolution Digital Elevation Model (DEM) data. Layover and Shadow areas can be exactly calculated, but not corrected. These areas have no thematic information.

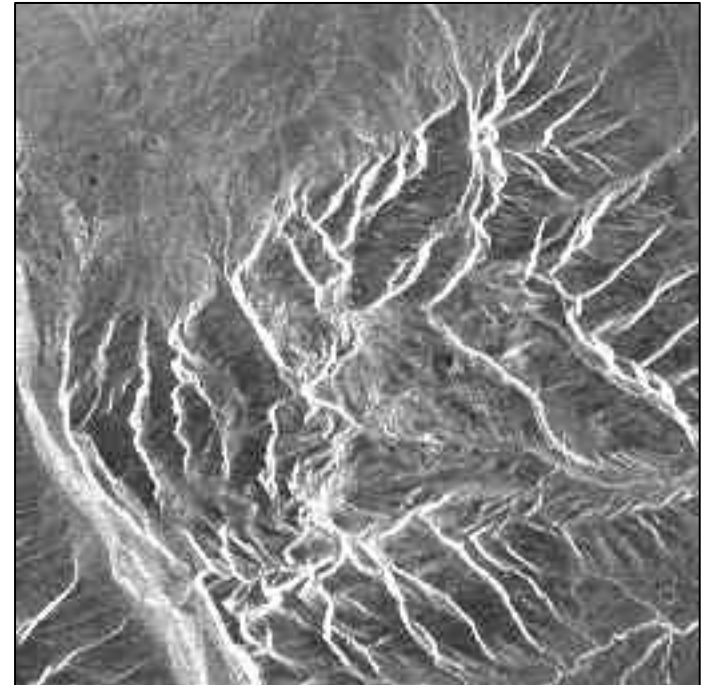




1.7 Geometry

Slant versus Ground Range Geometry

Often SAR data are converted from the slant range projection (i.e. the original SAR geometry) into the ground range one (see Figure).

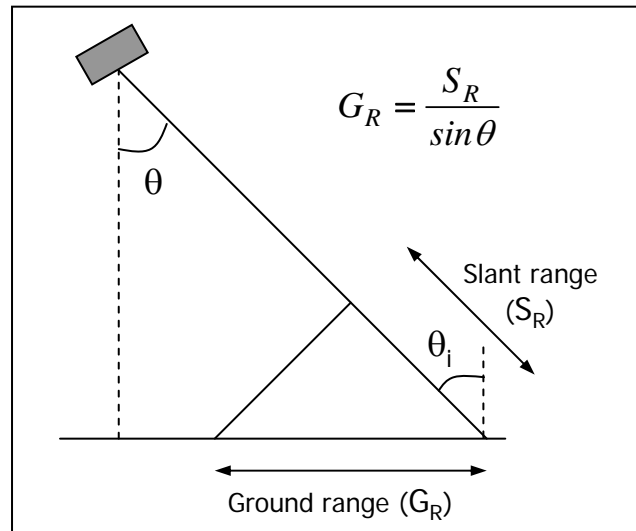

Note that SAR data in ground range projection are neither in a cartographic reference system (for instance UTM Zone 32) nor geometrically corrected. The only way to correctly geocode SAR data (i.e. to convert the SAR data into a map projection) is by applying a rigorous range-Doppler approach starting from SAR data in the original slant range geometry.






1.7 Geometry

Geometry in Azimuth

The frequency of the backscattered signal depends on the relative velocity between sensor and the target. Parts of the signal, which are reflected from targets in front of the sensor, are registered with a higher than the emitted frequency, since the antenna is moving towards the target. Similarly, the registered frequency of objects that are behind the sensor is lower than the emitted frequency.

All targets with a constant Doppler frequency shift describe a cone. The tip of this cone is the phase centre of the SAR antenna and its axis is defined by the velocity vector of the platform. The cutting between this Doppler cone and the surface of the Earth is a hyperbola, which is called the Iso-Doppler line (see Figure).

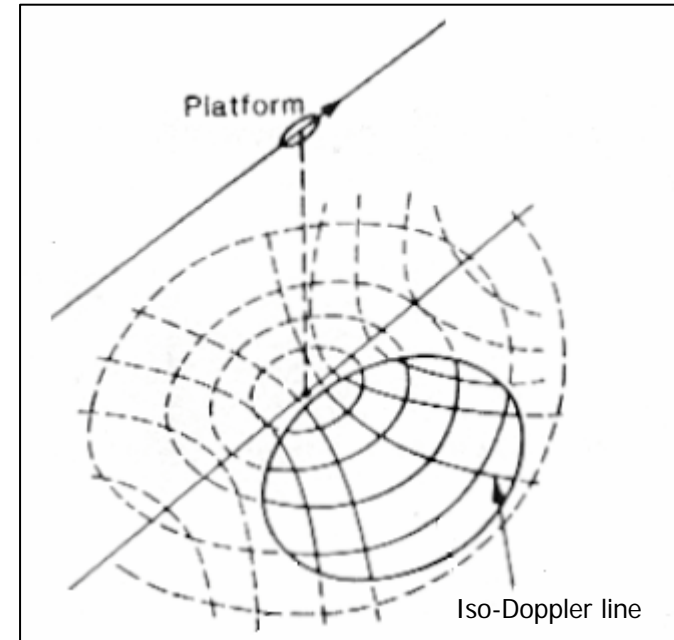

2. How SAR Products are Generated?

SAR systems can acquire data in different ways, such as i) single or dual channel mode (for instance HH or HH / HV or VV / VH), ii) interferometric (single- or repeat-pass) mode, iii) polarimetric mode (HH, HV, VH, VV), and finally, iv) by combining interferometric and polarimetric acquisition modes. Obviously, different acquisition modes are subject to different processing techniques. They are:

- **Processing of SAR Intensity**

The product generation is limited to the intensity processing.

- **Interferometric SAR (InSAR/DInSAR) Processing**

The product generation includes intensity, and interferometric phase processing.

- **Polarimetric SAR (PoISAR) Processing**

The product generation includes intensity, and polarimetric phase processing.

- **Polarimetric-Interferometric SAR (PolInSAR) Processing**

The product generation includes intensity, polarimetric, and interferometric phase processing.



2. How SAR Products are Generated?

SARscape® - Modules

- **Basic**

It includes a set of processing steps for the generation of SAR products based on intensity. This module is complemented by a multi-purpose tool.

This module is complemented by:

- **Focusing**

It supports the focusing of RADARSAT-1, ENVISAT ASAR, and ALOS PALSAR data.

- **Gamma & Gaussian Filter**

It includes a whole family of SAR specific filters. They are particularly efficient to reduce speckle, while preserving the radar reflectivity, the textural properties and the spatial resolution, especially in strongly textured SAR images.



2. How SAR Products are Generated?

SARscape® - Modules

- **Interferometry**

It supports the processing of Interferometric SAR (2-pass interferometry, InSAR) and Differential Interferometric SAR (n-pass interferometry, DInSAR) data for the generation of Digital Elevation Model, Coherence, and Land Displacement/ Deformation maps.

This module is complemented by:

- **ScanSAR Interferometry**

It offers the capabilities to process InSAR and DInSAR data over large areas (400 by 400 km).

- **SAR Polarimetry / Polarimetric Interferometry**

The PolSAR/PolInSAR module supports the processing of polarimetric and polarimetric interferometric SAR data.


- **Persistent Scatterers**

It enables to determine mm-scale displacements of individual features on the ground.



2. How SAR Products are Generated?

SARscape® in ENVI® Environment

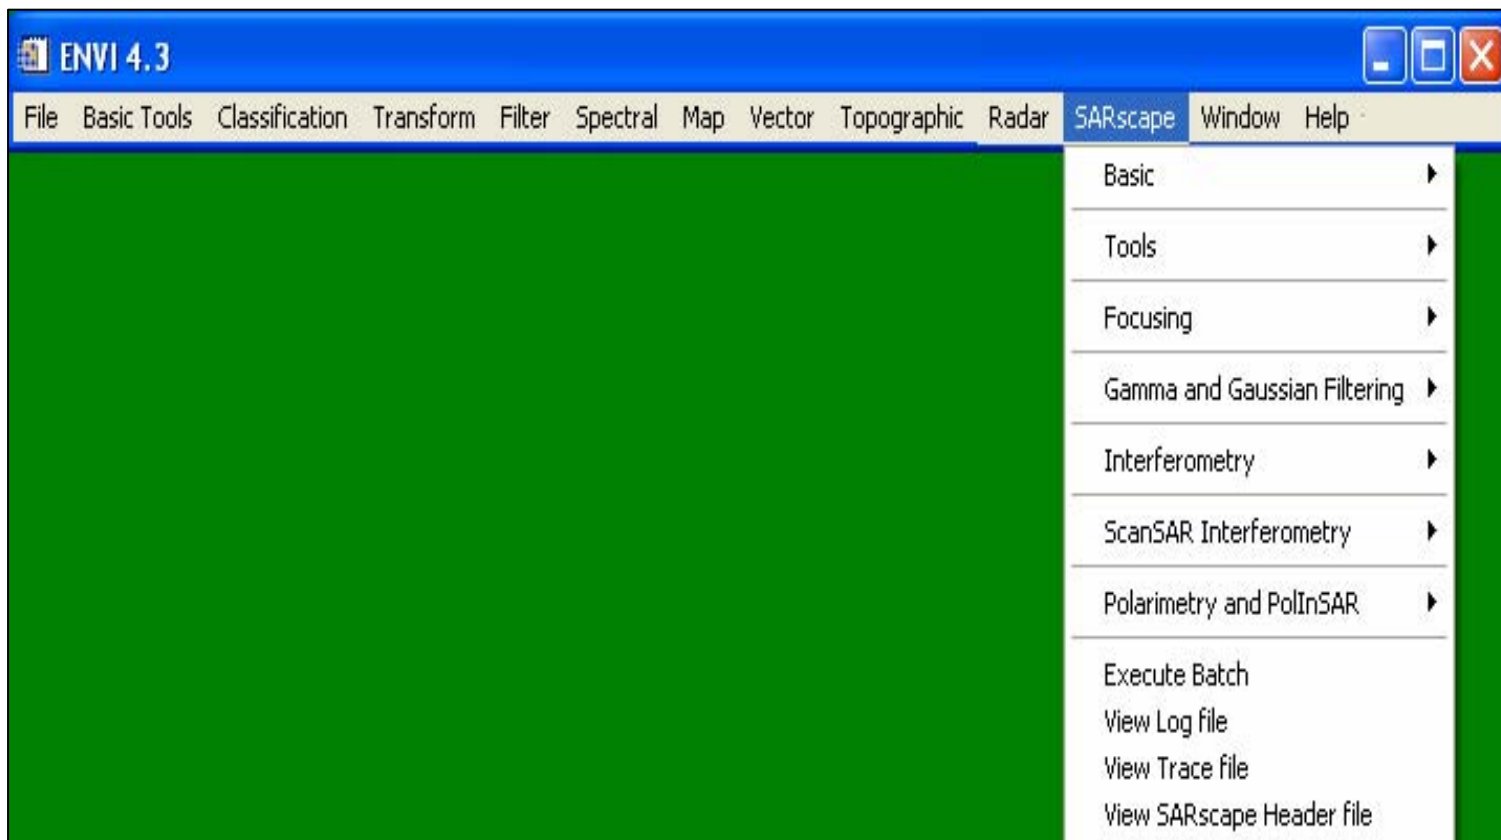

2. How SAR Products are Generated?

Processing Techniques

- ▶ 2.1 SAR Intensity Processing
- ▶ 2.2 Interferometric SAR (InSAR/DInSAR) Processing
- ▶ 2.3 Polarimetric SAR (PolSAR) Processing
- ▶ 2.4 Polarimetric-Interferometric SAR (PolInSAR) Processing



2. How SAR Products are Generated?

2.1 SAR Intensity Processing

-  2.1.1 Focusing
-  2.1.2 Multi-looking
-  2.1.3 Co-registration
-  2.1.4 Speckle Filtering
-  2.1.5 Geocoding
-  2.1.6 Radiometric Calibration
-  2.1.7 Radiometric Normalization
-  2.1.8 Mosaicing
-  2.1.9 Segmentation
-  2.1.10 Classification



2.1.1 Focusing

Purpose

SAR processing is a two-dimensional problem. In the raw data, the signal energy from a point target is spread in range and azimuth, and the purpose of SAR focussing is to collect this dispersed energy into a single pixel in the output image.

Focusing for SAR image formation involves sampled and quantized SAR echoes data and represents a numerical evaluation of the synthetic aperture beam formation process. A large number of arithmetic computations are involved. The numerical nature of the digital correlation calls for the formulation of an accurate mathematical procedure, often referred to as a SAR correlation or focusing algorithm, in order to manipulate the sample echo signals to accomplish the SAR correlation process.





2.1.1 Focusing

Method

SAR processing is performed in range and azimuth directions. In **range**, the signal is spread out by the **duration** of the linear Frequency Modulation (FM) **transmitted pulse**. In **azimuth**, the signal is spread out by the **length of the period** it is illuminated by the antenna beam, or the synthetic aperture. As a point target passes through the azimuth antenna beam, the range to the target changes. On the scale of the wavelength, this range variation causes a phase variation in the received signal as a function of azimuth. This phase variation over the synthetic aperture corresponds to the Doppler bandwidth of the azimuth signal, and allows the signal to be compressed in the azimuth direction.

The range variation to a point target can result in a variation in the range delay (distance sensor-target) to the target that is larger than the range sample spacing, resulting in what is called range migration. This range migration of the signal energy over several range bins must be corrected before azimuth compression can occur. The range-Doppler algorithm performs this correction very efficiently in the range-time, azimuth-frequency domain.






2.1.1 Focusing

Method (cont.)

In order to process the correct part of the azimuth frequency spectrum, the range-Doppler algorithm requires as input the **Doppler centroid**. It also requires knowledge of the **transmitted pulse** for range compression, and of the **imaging geometry** such as the range and **satellite velocity** for construction of the azimuth matched filter. The main steps are shown in the block diagram below, and are described in the following sections.

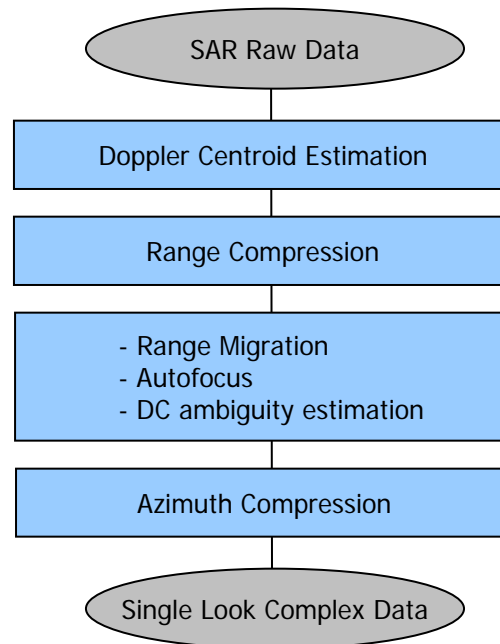




2.1.1 Focusing

Doppler Centroid Estimation

The Doppler Centroid (DC) frequency of SAR signal is related to location of the azimuth beam centre, and is an important input parameter when processing SAR imagery. DC locates the azimuth signal energy in the azimuth (Doppler) frequency domain, and is required so that all of the signal energy in the Doppler spectrum can be correctly captured by the azimuth compression filter, providing the best signal-to-noise ratio and azimuth resolution. Wrong DC estimation results in areas of low signal-to-noise ratio, strong discrete targets, and radiometric discontinuities. Even with an accurate knowledge of the satellite position and velocity, the pointing angle must be dynamically estimated from the SAR data in order to ensure that radiometric requirements are met.

A number of algorithms have been developed to estimate the Doppler centroid frequency. Often, the key challenge is to define techniques that will yield sufficiently accurate estimates for all processing modes.

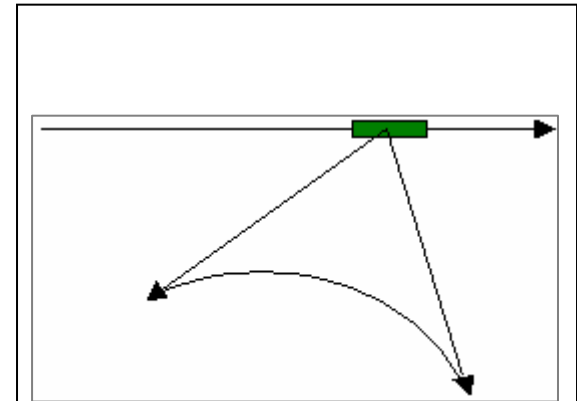

If the antenna is squinted (i.e. not perpendicular to the flight direction), the Doppler spectrum is not symmetric.





2.1.1 Focusing

Range Compression

In collecting the SAR data, a long-duration linear Frequency Modulation (FM) pulse is transmitted. This allows the pulse energy to be transmitted with a lower peak power. The linear FM pulse has the property that, when filtered with a matched filter (e.g. the reference function), the result is a narrow pulse in which all the pulse energy has been collected to the peak value. Thus, when a matched filter is applied to the received echo, it is as if a narrow pulse were transmitted, with its corresponding range resolution and signal-to-noise ratio.

This matched filtering of the received echo is called range compression. Range compression is performed on each range line of SAR data, and can be done efficiently by the use of the Fast Fourier Transform (FFT). The frequency domain range matched filter needs to be generated only once, and it is applied to each range line. The range matched filter may be computed or generated from a replica of the transmitted pulse. In addition, the range matched filter frequency response typically includes an amplitude weighting to control sidelobes in the range impulse response.






2.1.1 Focusing

Range Compression (cont.) - An Example

In the following pictures an example is shown of how SAR data are processed for a single synthetic point. In horizontal is shown the azimuth direction, in vertical the range one.

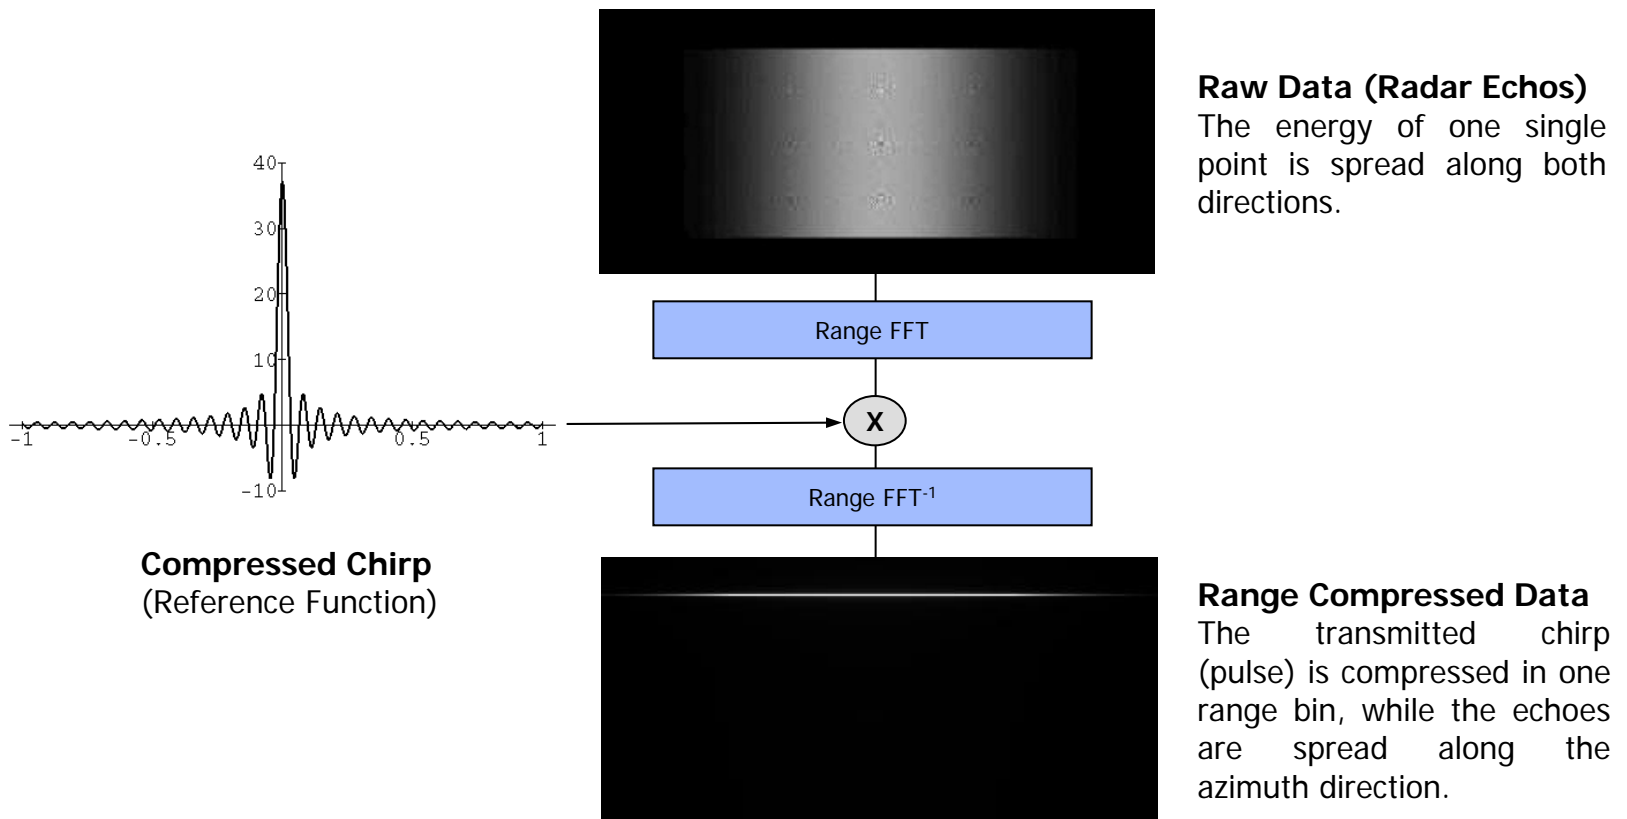



2.1.1 Focusing

Azimuth Compression

Azimuth compression is a matched filtering of the azimuth signal, performed efficiently using FFT's. The frequency response of the azimuth compression filter is precomputed using the orbital geometry. The azimuth filter also depends on range. Thus the data is divided into range invariance regions, and the same basic matched filter is used over a range interval called the Frequency Modulation (FM) rate invariance region. The size of this invariance region must not be large enough to cause severe broadening in the compressed image. Also included is an amplitude weighting to control sidelobes in the azimuth impulse response. Note that the position of the amplitude weighting in the azimuth frequency array depends on the Doppler Centroid, which also depends on range.

The extracted frequency array for each look is multiplied by the matched filter frequency response and the inverse FFT is performed to form the complex look image. The matched filter frequency response is adjusted by a small linear phase ramp for each look. In addition, azimuth interpolation may also be performed after look compression to achieve a desired azimuth pixel spacing, and it is done on each look separately.






2.1.1 Focusing

Azimuth Compression (cont.) - An Example

Range compressed data are, after the Range Cell Migration Correction, azimuth compressed. Note that during focusing, these steps are executed on the whole image, to obtain a complex image (Single Look Complex) where amplitude is related to the radar reflectivity, and phase to the acquisition geometry and on the ground topography.

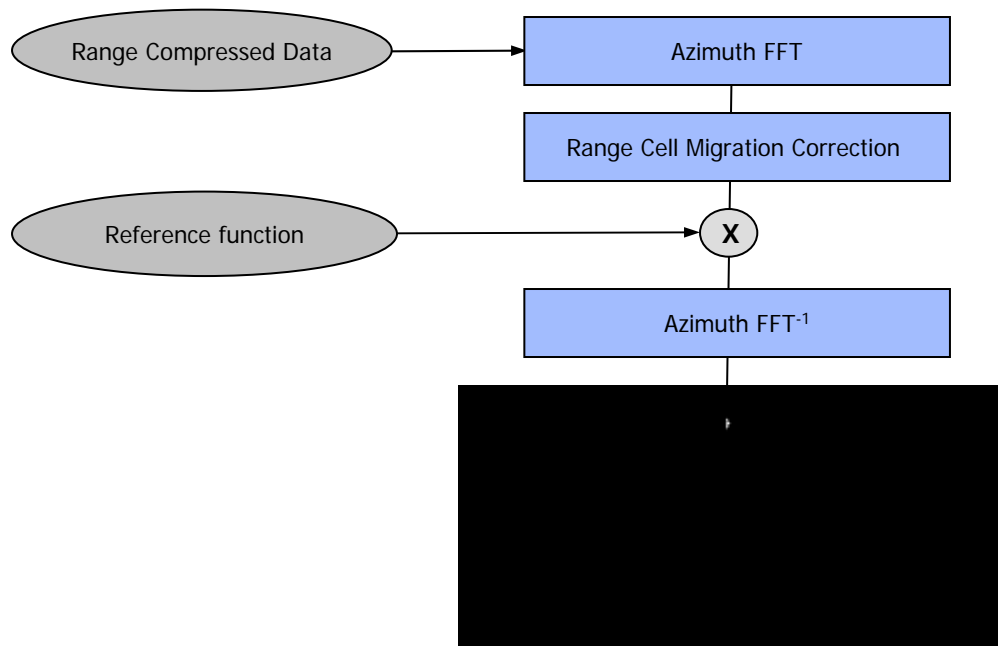

Azimuth compressed data
All the energy backscattered by one single resolution cell on ground is compressed in one pixel.






2.1.1 Focusing

From Single Look Complex to Detected (1-Look) Data

After look compression, each of the look images is detected, i.e. the data is converted from complex to real numbers ($r^2 + i^2 = P^2$). That is, the Power (or Intensity) of each complex sample is calculated. Note that the pixel of the Single Look Complex (SLC) and Power data does not have the same dimensions as the resolution cell during the data acquisition, due to the variation of range resolution with incidence angle.


The picture below shows - as example - an ENVISAT ASAR AP (HH polarization) data of Lichtenburg (South Africa) with 1-look.

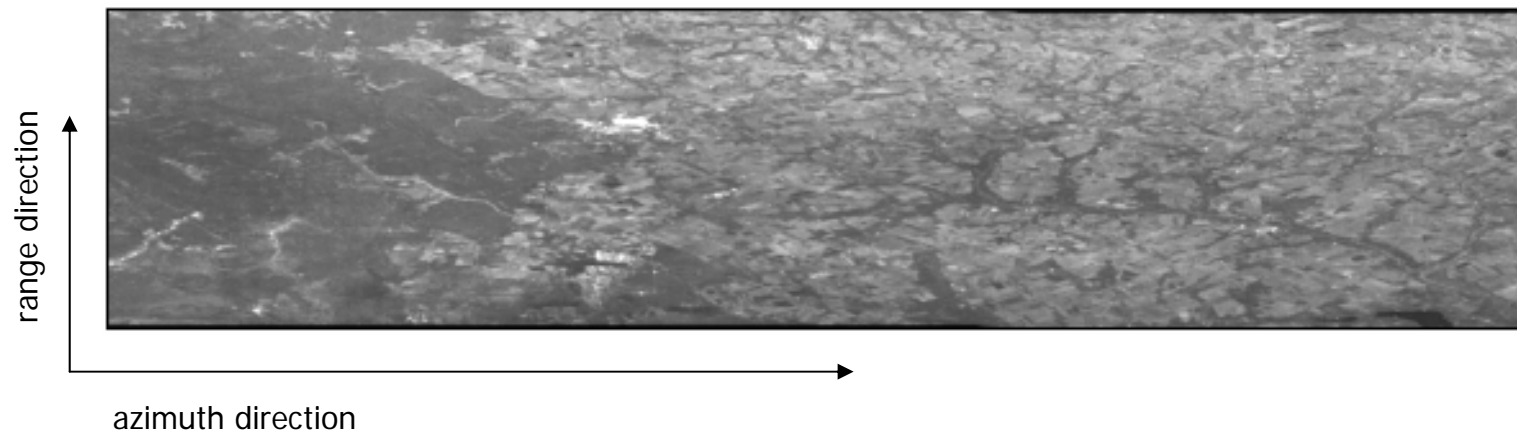



2.1.1 Focusing

SARscape® - Focusing Module

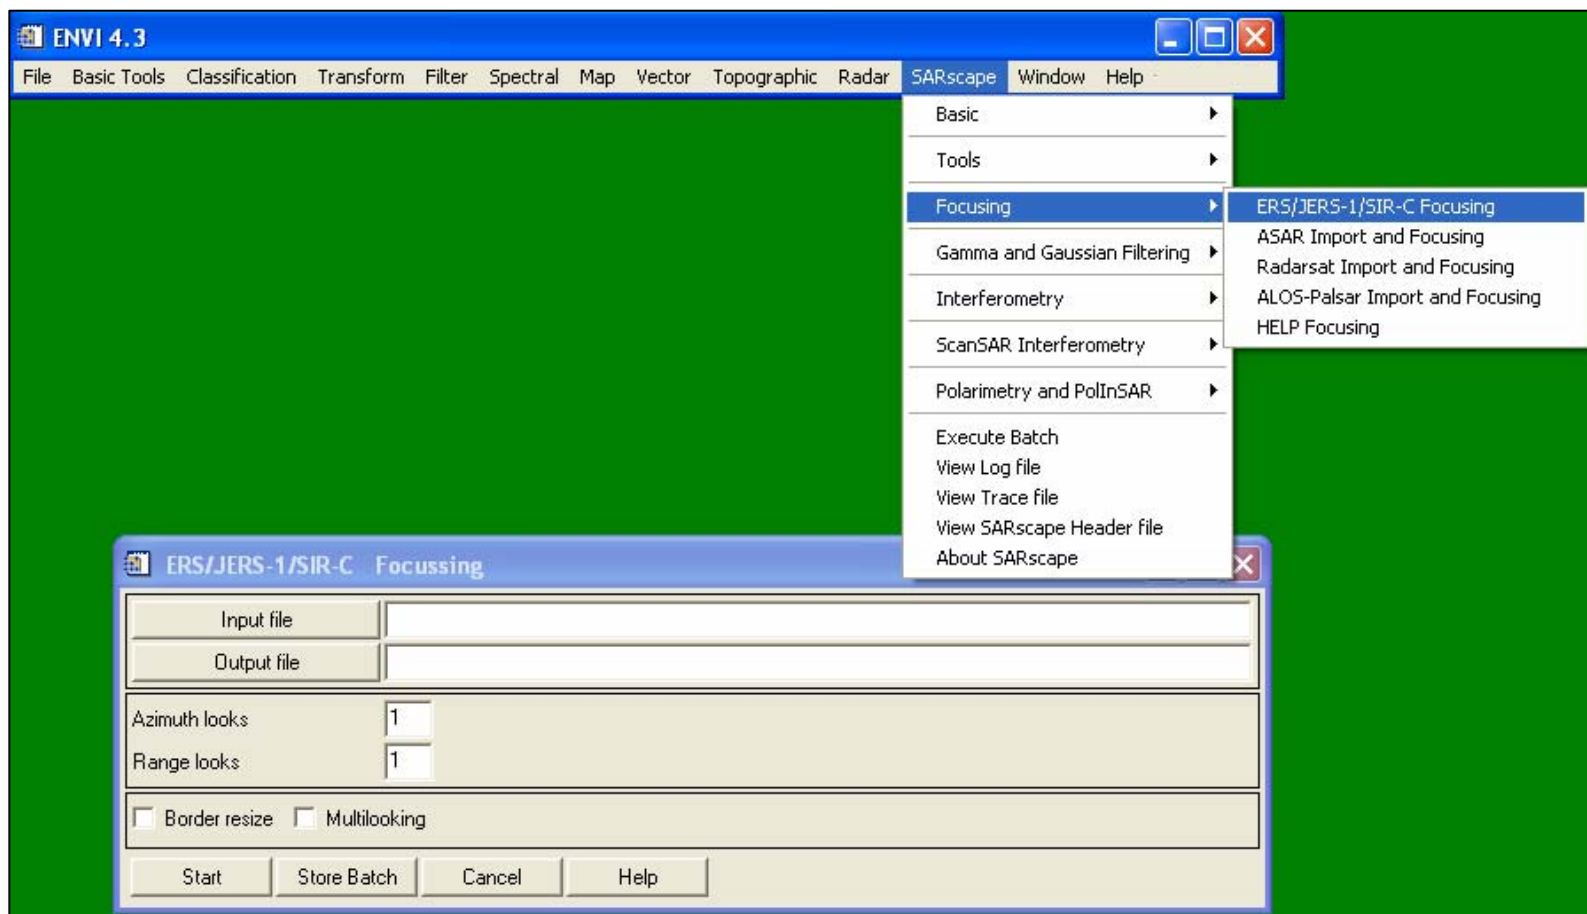

The screenshot displays the ENVI 4.3 software interface with the SARscape menu open. The SARscape menu includes options for Basic, Tools, Focusing, Gamma and Gaussian Filtering, Interferometry, ScansAR Interferometry, Polarimetry and PolInSAR, Execute Batch, View Log file, View Trace file, View SARscape Header file, and About SARscape. The Focusing sub-menu is expanded, showing options for ERS/JERS-1/SIR-C Focusing, ASAR Import and Focusing, Radarsat Import and Focusing, ALOS-Palsar Import and Focusing, and HELP Focusing. A dialog box titled "ERS/JERS-1/SIR-C Focussing" is open in the foreground, featuring input fields for "Input file" and "Output file", spinners for "Azimuth looks" and "Range looks" (both set to 1), and checkboxes for "Border resize" and "Multilooking". The dialog box has buttons for "Start", "Store Batch", "Cancel", and "Help".







2.1.2 Multi-looking

Purpose

The SAR signal processor can use the full synthetic aperture and the complete signal data history in order to produce the highest possible resolution, albeit very speckled, Single Look Complex (SLC) SAR image product. Multiple looks may be generated - during multi-looking - by averaging over range and/or azimuth resolution cells. For an improvement in radiometric resolution using multiple looks there is an associated degradation in spatial resolution. Note that there is a difference between the number of looks physically implemented in a processor, and the effective number of looks as determined by the statistics of the image data.

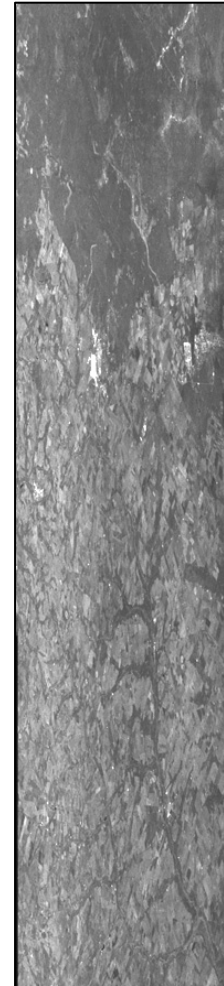

ENVISAT ASAR AP (HH polarization) data of Lichtenburg (South Africa) with 1 look (left) and multi-looked with a factor 4 in azimuth (right).





2.1.2 Multi-looking

How to select an appropriate number of looks - An Example

The number of looks is a function of

- pixel spacing in azimuth
- pixel spacing in slant range
- incidence at scene centre

The goal is to obtain in the multi-looked image approximately squared pixels considering the ground range resolution (and not the pixel spacing in slant range) and the pixel spacing in azimuth. In particular, in order to avoid over- or under-sampling effects in the geocoded image, it is recommended to generate a multi-looked image corresponding to approximately the same spatial resolution foreseen for the geocoded image product.

Note that ground resolution in range is defined as

$$\text{ground range resolution} = \frac{\text{pixel spacing range}}{\sin(\text{incidence angle})}$$





2.1.2 Multi-looking

How to select an appropriate number of looks (cont.) - An Example

- pixel spacing azimuth = 3.99 m
 - pixel spacing range = 7.90 m
 - incidence angle = 23°
- > ground resolution = $7.90 / \sin(23^\circ) = 20.21$ m
- > resulting pixel spacing azimuth = $3.99 \cdot 5 = 19.95$ m
- > recommended pixel size of geocoded image 20 m


It is important to note that this example refers to ERS-1/2 SAR data, which is characterized by a fixed acquisition geometry. Advanced current SAR systems - such as RADARSAT-1, ENVISAT ASAR, and future SAR missions - can acquire images with different incidence angle (i.e. different Beam Modes). In this case, to each different acquisition mode a different multi-looking factor in range and azimuth must be applied.





2.1.2 Multi-looking


SARscape® - Focusing Module

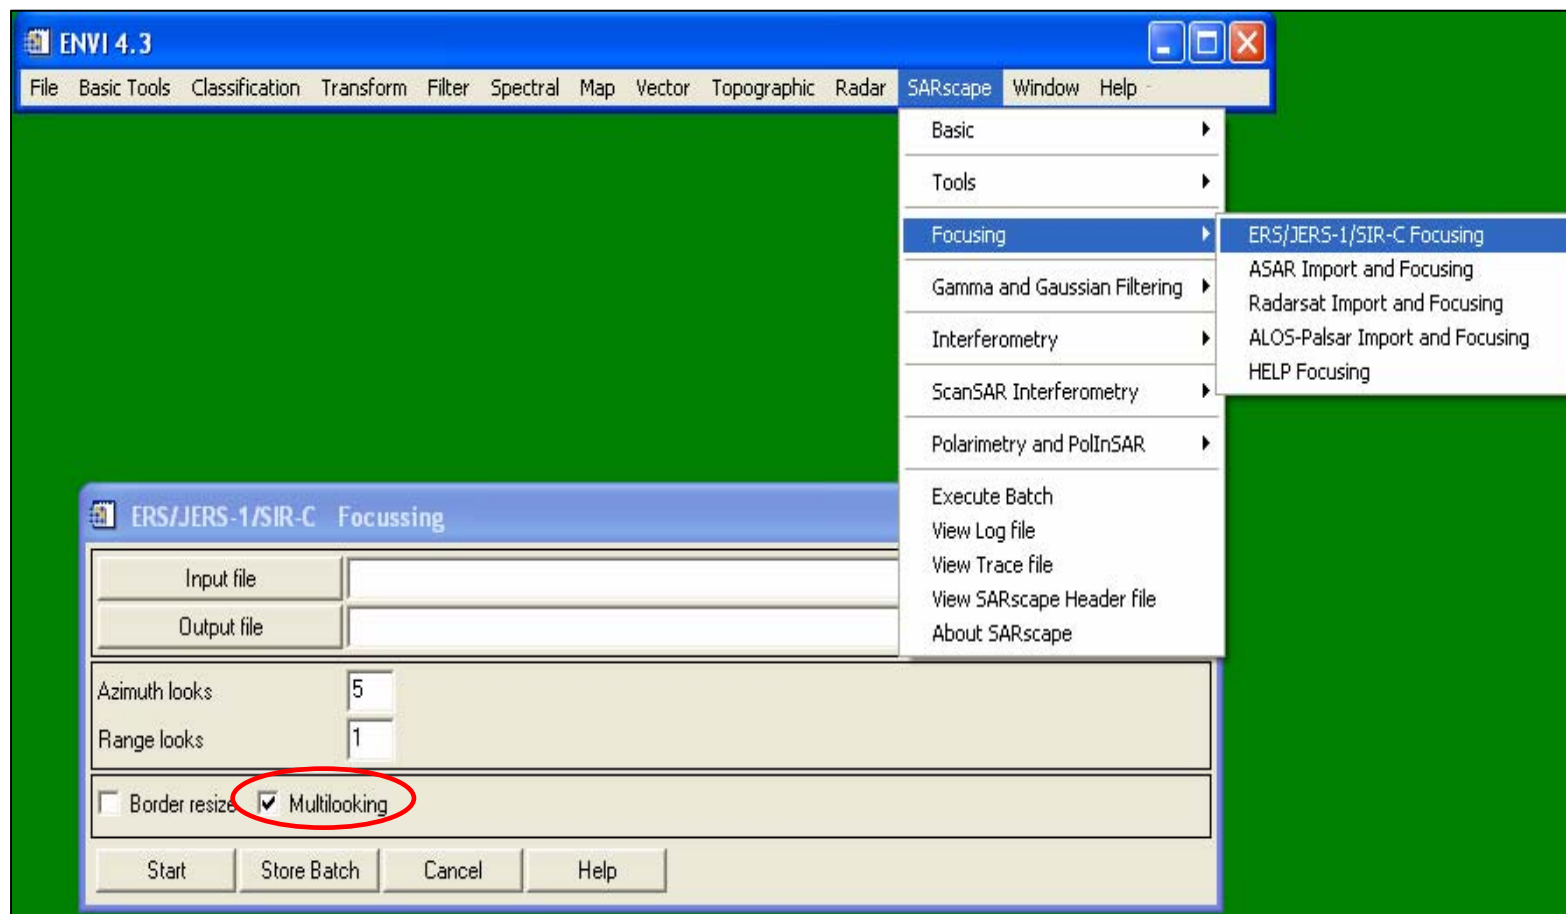



2.1.2 Multi-looking

SARscape® - Basic Module

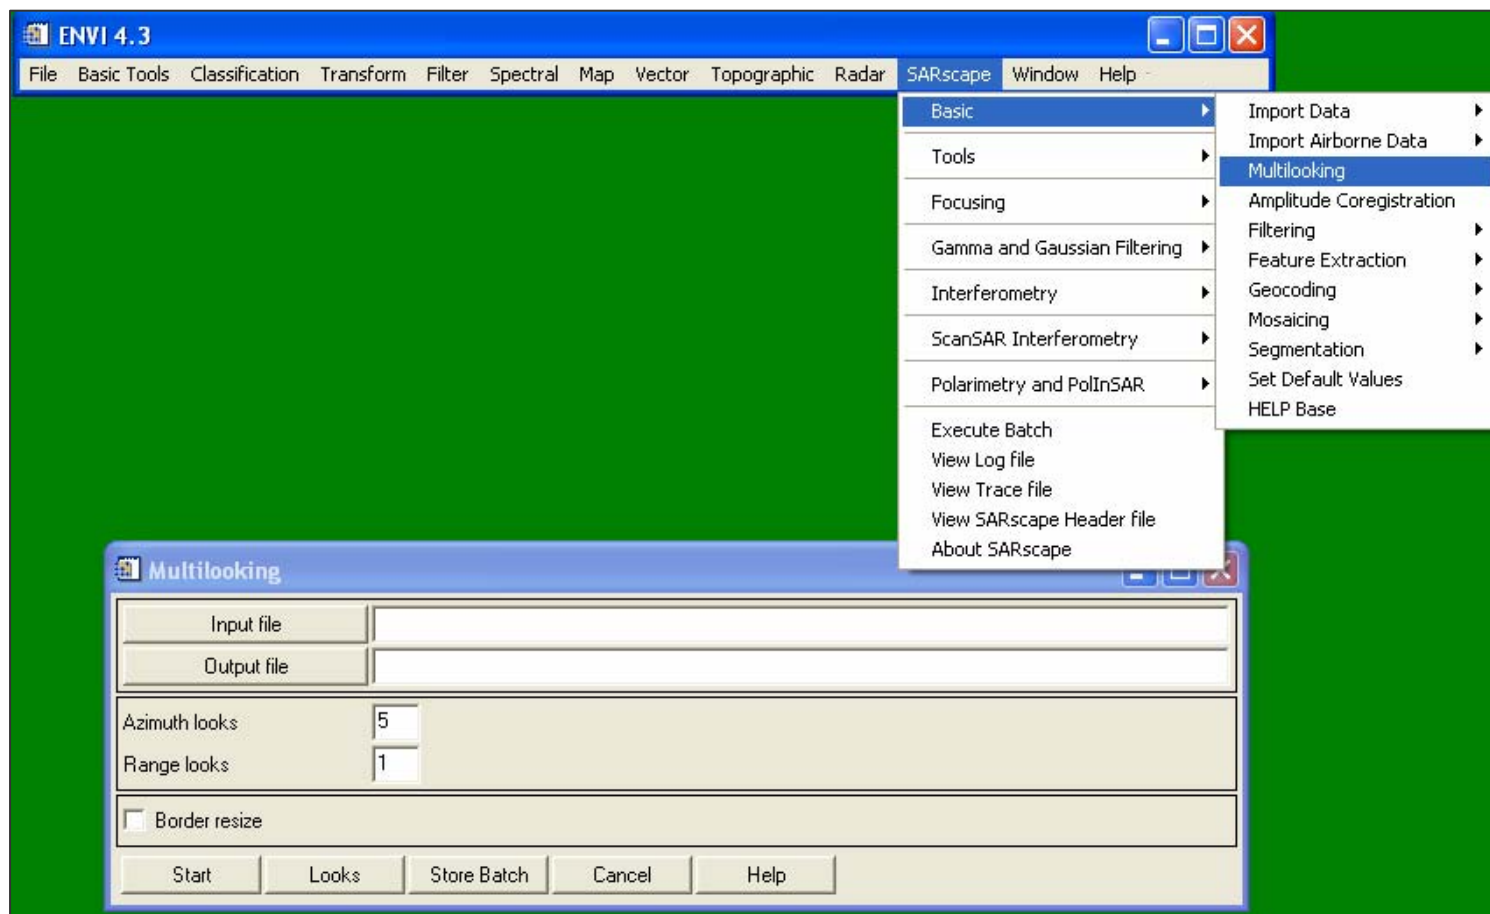




2.1.3 Co-registration

Purpose

When multiple images cover the same region and, in particular, a speckle filtering based on time-series will be performed, or image ratioing (or similar operations) are required in slant (alternatively ground) range geometry, SAR images must be co-registered. This requires spatial registration and potentially resampling (in cases where pixel sizes differ) to correct for relative translational shift, rotational and scale differences. Note that co-registration is simply the process of superimposing, in the slant range geometry, two or more SAR images that have the same orbit and acquisition mode. This process must not to be confused with geocoding (or georeferencing), which is the process of converting each pixel from the slant range geometry to a cartographic reference system.

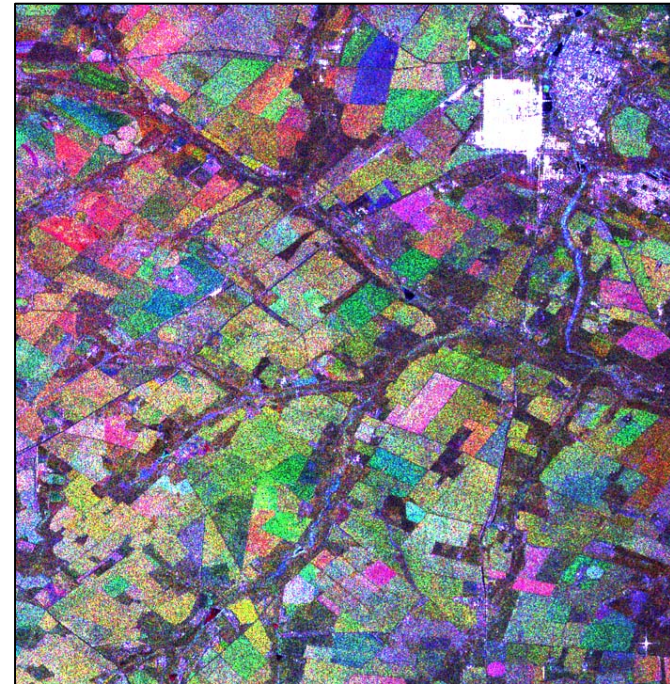

ENVISAT ASAR AP (HH polarization) data of Lichtenburg (South Africa) acquired at three different dates have been focused, multi-looked and co-registered. The color composite have been generated by combining the three co-registered images assigned to the red, green and blue channel.





2.1.3 Co-registration

Method

This step is performed in an automatic way, according to the following procedure:


- A gross shift estimation is computed based on the orbital data parameters.
- A set of sub-windows is selected automatically based on the reference image and on the image(s) to be co-registered.
- The cross-correlation function is computed between the pixels of corresponding sub-windows in the two images.
- The maximum of the cross-correlation function indicates the proper shift for the selected location.
- The shift to be applied in azimuth direction and range direction is calculated by a polynomial depending on the pixel position respectively in azimuth and range.





2.1.3 Co-registration

SARscape® - Basic Module

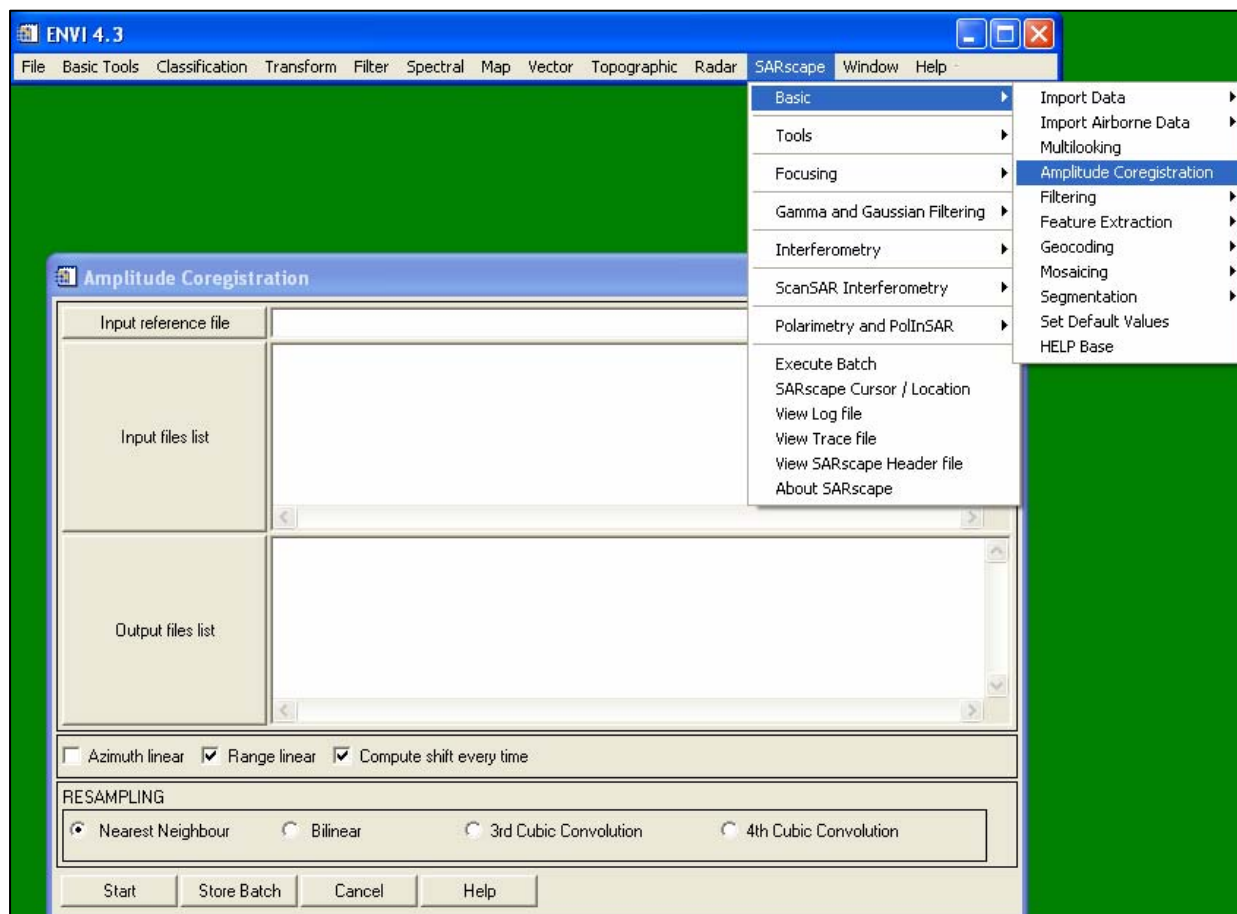



2.1.4 Speckle Filtering

Purpose

Images obtained from coherent sensors such as SAR (or Laser) system are characterized by speckle. This is a spatially random multiplicative noise due to coherent superposition of multiple backscatter sources within a SAR resolution element. In other words, speckle is a statistical fluctuation associated with the radar reflectivity (brightness) of each pixel in the image of a scene. A first step to reduce speckle - at the expense of spatial resolution - is usually performed during the multi-looking, where range and/or azimuth resolution cells are averaged. The more looks that are used to process an image, the less speckle there is.

In the following sections selected algorithms are shortly presented.






2.1.4 Speckle Filtering

Speckle Filtering or Segmentation?


In essence, there is no golden rule solution: speckle filtering or segmentation (Section 2.1.7) should be applied with respect to the specific needs.

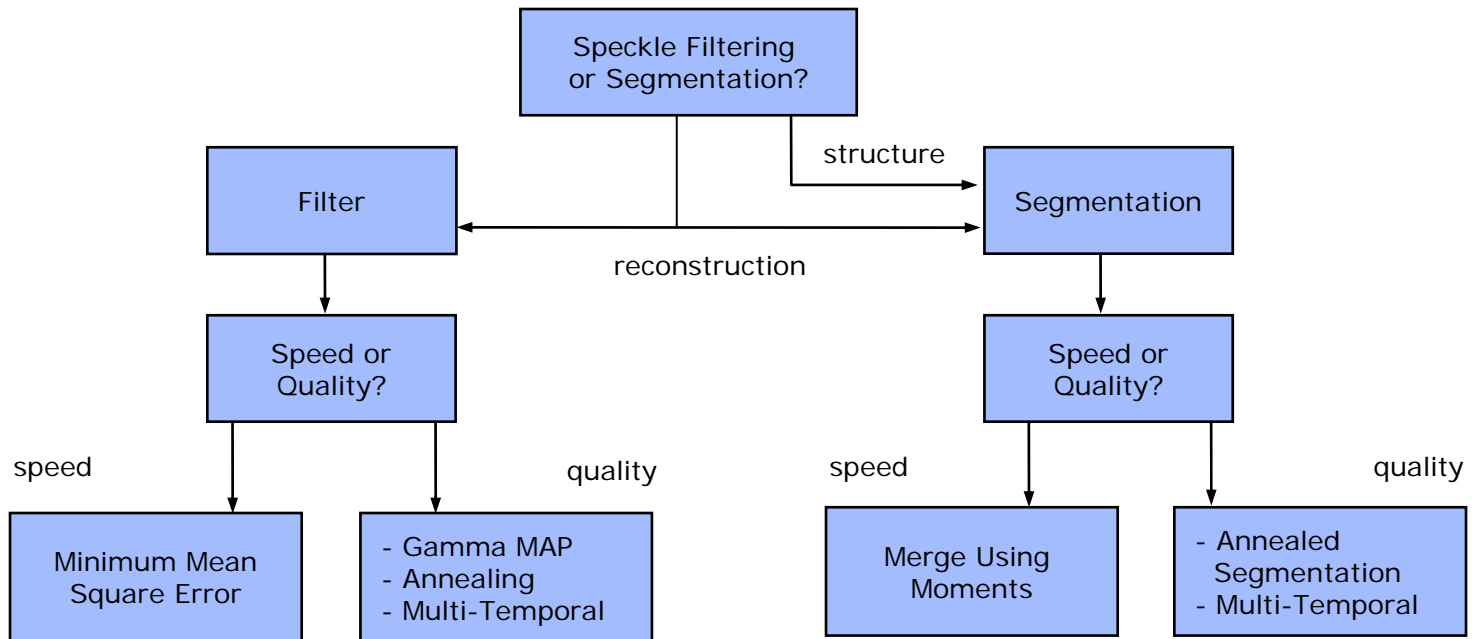



2.1.4 Speckle Filtering

Overview

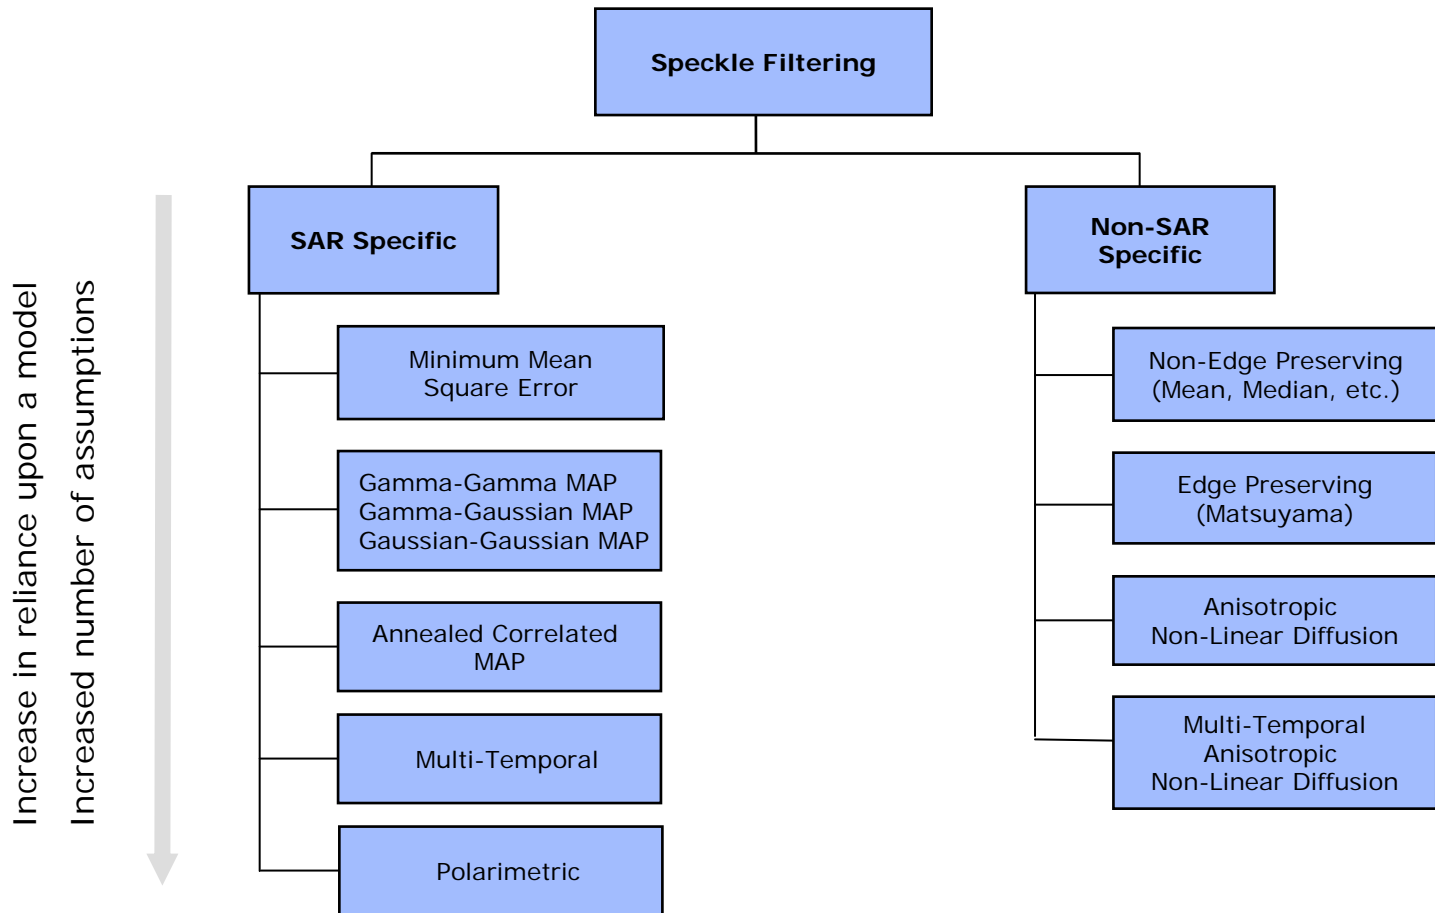



2.1.4 Speckle Filtering

Minimum Mean Square Error Filters

The most well known adaptive filters are based on a multiplicative model and they consider local statistic.

The **Frost** filter is an adaptive filter, and convolves the pixel values within a fixed size window with an adaptive exponential impulse response.

The **Lee** and **Kuan** filters perform a linear combination of the observed intensity and of the local average intensity value within the fixed window. They are all adaptive as a function of the local coefficient of variation (which is a good indicator of the presence of some heterogeneity within the window) and can be enhanced by fixing a minimum value for better speckle smoothing and an upper limit texture or point target preservation.





2.1.4 Speckle Filtering

Gamma-Gamma and Gaussian-Gaussian Maximum A Posteriori (MAP)

In the presence of scene texture, to preserve the useful spatial resolution, e.g. to restore the spatial fluctuations of the radar reflectivity (texture), an A Priori first order statistical model is needed. With respect to SAR clutter, it is well accepted that the Gamma-distributed scene model is the most appropriate. The Gamma-distributed scene model, modulated by, either an independent complex-Gaussian speckle model (for SAR SLC images), or by a Gamma speckle model (for multi-look detected SAR images), gives rise to a K-distributed clutter. Nevertheless, the Gaussian-distributed scene model remains still popular, mainly for mathematical tractability of the inverse problem in case of multi-channel SAR images (multivariate A Priori scene distributions). In this context, the following filter families has been developed:

- Single channel detected SAR data
 - Gamma-Gamma MAP filter
 - Gamma-Distribution-Entropy MAP filter
 - Gamma-A Posteriori Mean filter
- Multi-channel detected SAR data
 - Gamma-Gaussian MAP filter for uncorrelated speckle
 - Gaussian-Gaussian MAP filter for correlated speckle
 - Gaussian-Distribution-Entropy MAP filter for correlated speckle





2.1.4 Speckle Filtering

Multi-Temporal Filters

Within the Multi-Temporal filtering - besides the consideration of a speckle specific filter - an optimum weighting filter is introduced to balance differences in reflectivity between images at different times. It has to be pointed out that multi-temporal filtering is based on the assumption that the same resolution element on the ground is illuminated by the radar beam in the same way, and corresponds to the same coordinates in the image plane (sampled signal) in all images of the time series. The reflectivity can of course change from one time to the next due to a change in the dielectric and geometrical properties of the elementary scatters, but should not change due to a different position of the resolution element with respect to the radar. Therefore proper spatial co-registration of the SAR images in the time series is of paramount importance.





2.1.4 Speckle Filtering

Single-Image and Multi-temporal Anisotropic Non-Linear Diffusion Filter

First introduced for single optical images, this particular type of single-image filtering allows a high level of regularization in homogenous areas while preserving the relevant features ultimately used for segmentation (edges or more generally discontinuities). This is realized by introducing an edge-direction sensitive diffusion controlled by a tensor of values specifying the diffusion importance in the features direction

The drawback of existing multi-temporal speckle filters is that they are strongly sensor and acquisition mode dependant, because based on statistical scene descriptors. Moreover, if features masks are used, an accuracy loss can be introduced when regarding particular shape preservation, mainly due to the lack of a priori information about size and type of the features existent in the image. Therefore, in order to take advantage of the redundant information available when using multi-temporal series, while being fully independent regarding the data source, a hybrid multi-temporal anisotropic diffusion scheme is proposed.





2.1.4 Speckle Filtering

Example 1



ENVISAT ASAR AP (HH polarization) multi-looked unfiltered (left) and Gamma-Gamma MAP filtered image (right). Note the speckle reduction while preserving the structural features of the Gamma-Gamma MAP one.



2.1.4 Speckle Filtering

Example II




Mean (left) and Multi-Temporal (De Grandi) filtered (right) ENVISAT ASAR AP (HH polarization) image. Note the blurring effects of the mean filter, and the strong speckle reduction while preserving the structural features of the multi-temporal (De Grandi filter) one.





2.1.4 Speckle Filtering

Example III

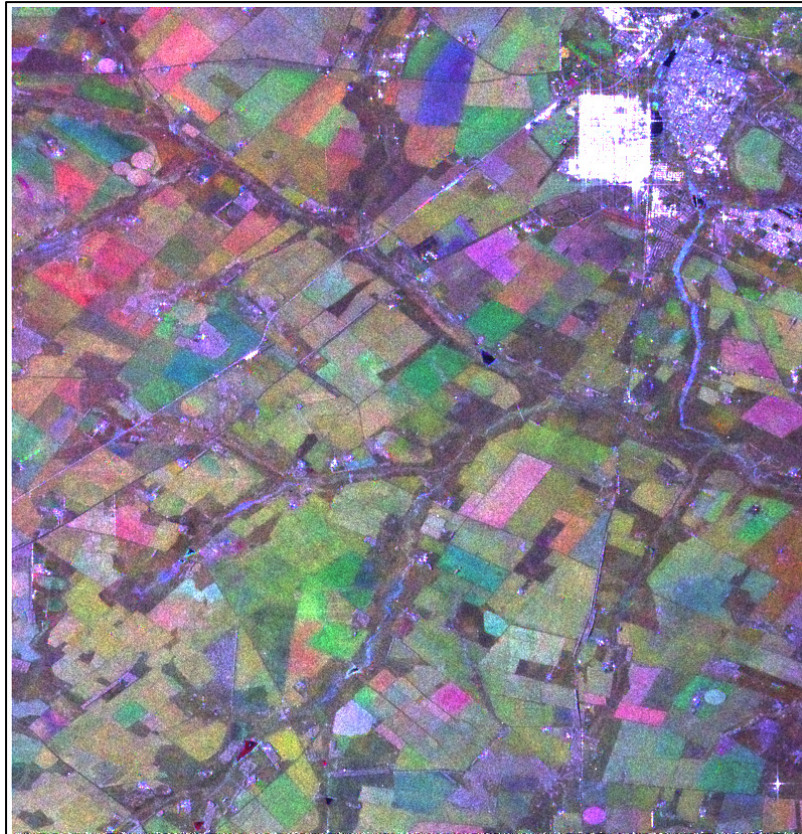


The picture shows a sample of three speckle filtered ENVISAT ASAR AP (HH polarization) images from the area of Lichtenburg (South Africa) acquired at different dates. Note that the images have been focused, multi-looked, co-registered and speckle filtered using a Multi-Temporal (De Grandi) filter. Compare this image with the multi-temporal unfiltered one (2.1.3 Co-registration).





2.1.4 Speckle Filtering

SARscape® - Basic Module

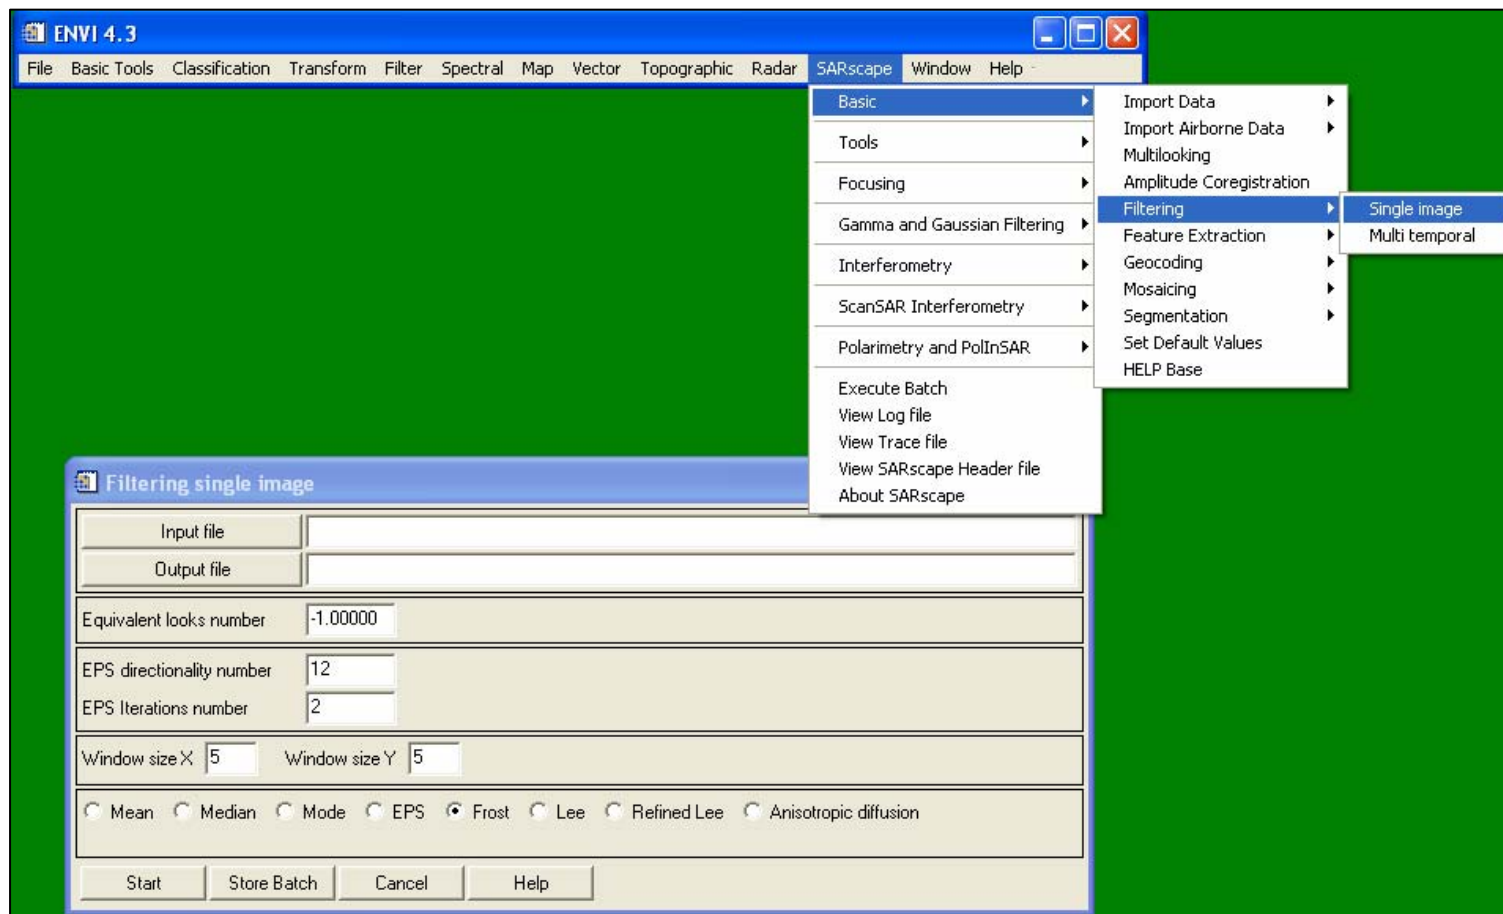

The screenshot shows the ENVI 4.3 SARscape interface. The main window title is "ENVI 4.3". The menu bar includes "File", "Basic Tools", "Classification", "Transform", "Filter", "Spectral", "Map", "Vector", "Topographic", "Radar", "SARscape", "Window", and "Help". The "SARscape" menu is open, showing options: "Basic", "Tools", "Focusing", "Gamma and Gaussian Filtering", "Interferometry", "ScansAR Interferometry", "Polarimetry and PolInSAR", "Execute Batch", "View Log file", "View Trace file", "View SARscape Header file", and "About SARscape". The "Filtering" option is selected, opening a sub-menu with "Single image" and "Multi temporal".

The "Filtering single image" dialog box is open, showing the following settings:

- Input file: [Empty text box]
- Output file: [Empty text box]
- Equivalent looks number: -1.00000
- EPS directionality number: 12
- EPS Iterations number: 2
- Window size X: 5
- Window size Y: 5
- Filtering method: Mean Median Mode EPS Frost Lee Refined Lee Anisotropic diffusion


Buttons at the bottom of the dialog: Start, Store Batch, Cancel, Help.





2.1.4 Speckle Filtering

SARscape® - Gamma and Gaussian Filter Module

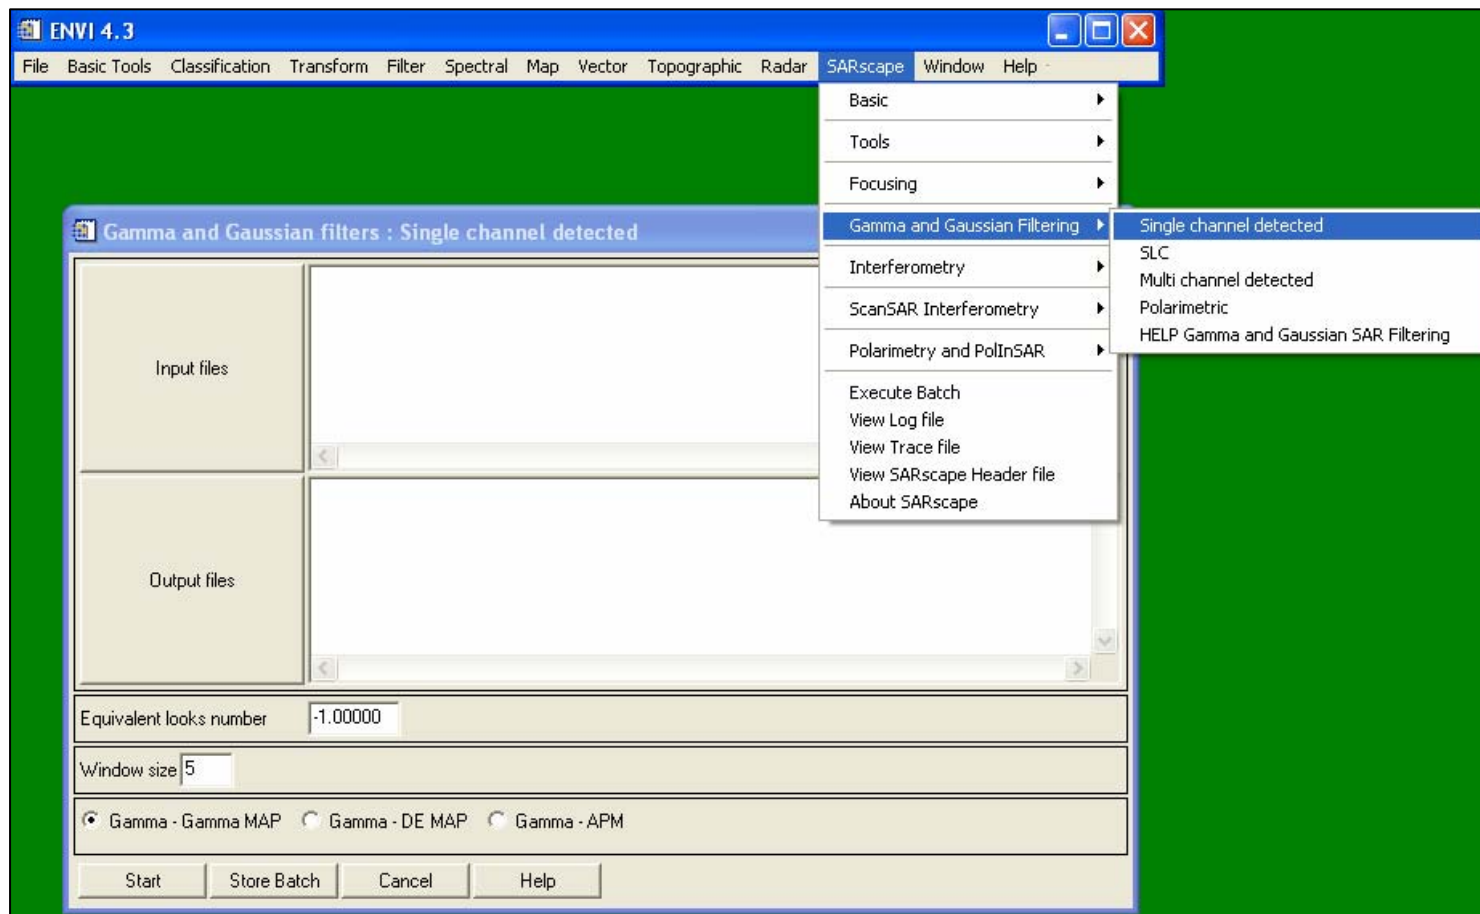



2.1.5 Geocoding

Purpose

Geocoding, Georeferencing, Geometric Calibration, and Ortho-rectification are synonyms. All of these definitions mean the conversion of SAR images - either slant range (preferably) or ground range geometry - into a map coordinate system (e.g. cartographic reference system). A distinction is usually made between

- **Ellipsoidal Geocoding**, when this process is performed without the use of Digital Elevation Model (DEM) data
- **Terrain Geocoding**, when this process is performed with the use of DEM data

Note that the only appropriate way to geocode SAR data is by applying a range-Doppler approach (refer to SAR geometry section for the justification). In fact, SAR systems cause non-linear compressions (in particular in the presence of topography), and thus they can not be corrected using polynomials as in the case of optical images, where (in the case of flat Earth) an affine transformation is sufficient to convert it into a cartographic reference system.





2.1.5 Geocoding

Range-Doppler Approach

The removal of geometric distortions requires a high precision geocoding of the image information. The geometric correction has to consider the sensor and processor characteristics and thus must be based on a rigorous range-Doppler approach. For each pixel the following two relations must be fulfilled:

$$R = S - P$$

Range equation

$$f_D = \frac{2f_0(v_p - v_s)R_s}{c|R_s|}$$

Doppler equation

where

- R_s = Slant range
- S, P = Spacecraft and backscatter element position
- v_s, v_p = Spacecraft and backscatter element velocity
- f_0 = Carrier frequency
- c = Speed of light
- f_D = Processed Doppler frequency






2.1.5 Geocoding

Range-Doppler Approach (cont.)

Using these equations, the relationship between the sensor, each single backscatter element and their related velocities is calculated and therefore not only the illuminating geometry but also the processors characteristics are considered. This complete reconstruction of the imaging and processing geometry also takes into account the topographic effects (foreshortening, layover) as well as the influence of Earth rotation and terrain height on the Doppler frequency shift and azimuth geometry.

The geocoding is usually implemented using a backward solution (see Figure), i.e. the Output (DEM or ellipsoidal height) is the starting point.

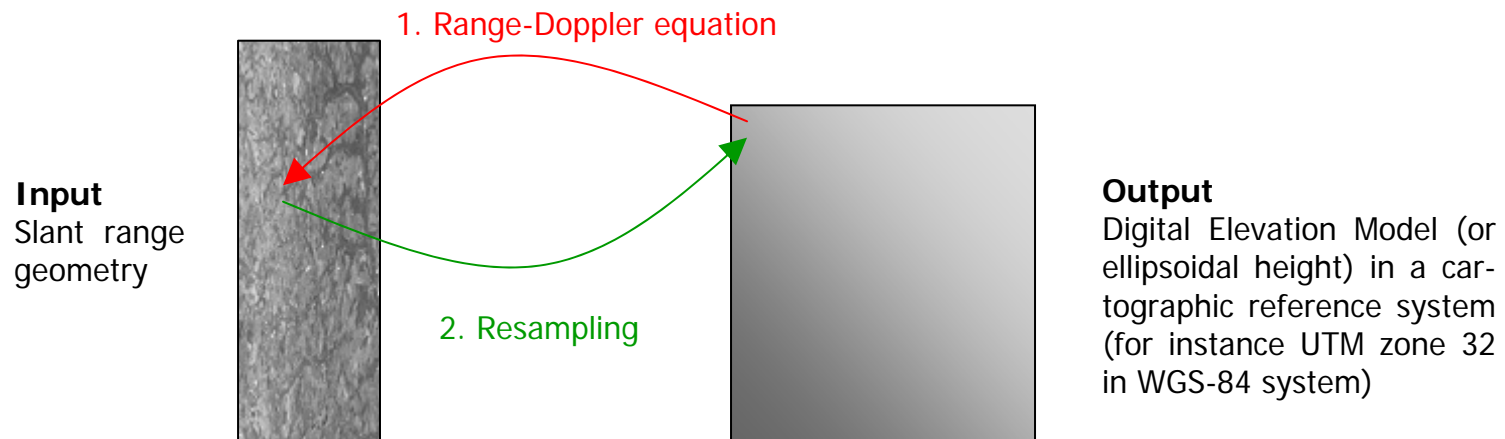



2.1.5 Geocoding

Nominal versus Precise Geocoding

In the geocoding procedure following nomenclature is used:

- **Nominal Geocoding**, if
 - No Ground Control Point (GCP)
 - Orbital parameters (positions and velocities)
 - Processed parameters (Doppler, range delay, pixel spacing, etc.)
 - Digital Elevation Model or Ellipsoidal heightare used during the geocoding process.
- **Precise Geocoding**, if
 - Ground Control Points (1 GCP is sufficient)
 - Orbital parameters (positions and velocities)
 - Processed parameters (Doppler, range delay, pixel spacing, etc.)
 - Digital Elevation Modelare used during the geocoding process.


Note that geocoded images achieve a pixel accuracy even without the use of GCPs, if proper processing is performed and orbital parameters (so-called precise orbits) are available.





2.1.5 Geocoding

Geodetic and Cartographic Transforms

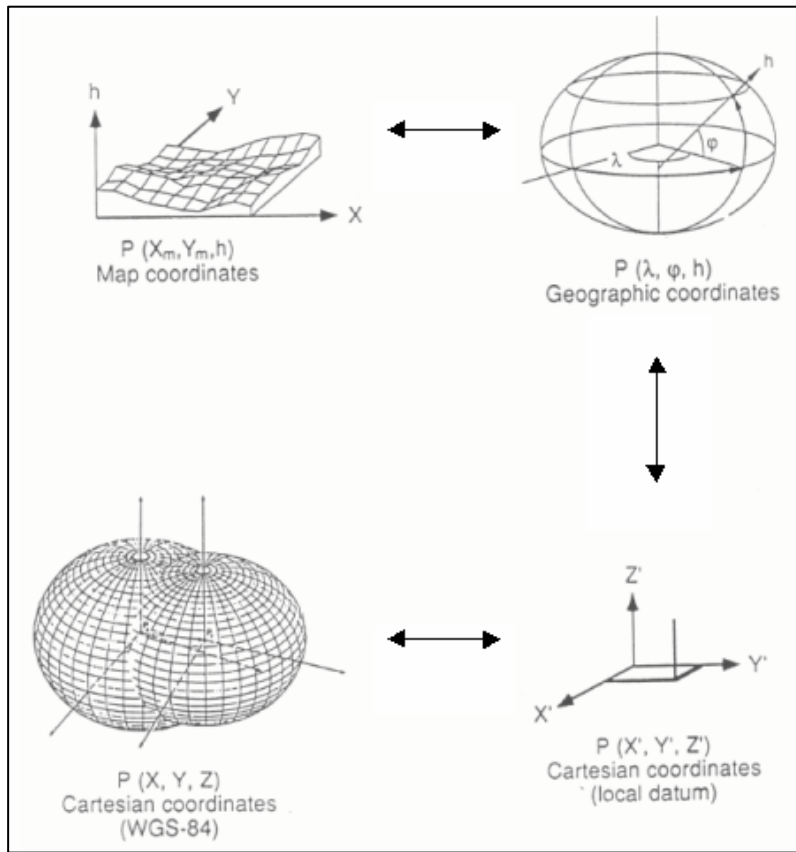

During the geocoding procedure geodetic and cartographic transforms must be considered in order to convert the geocoded image from the Global Cartesian coordinate system (WGS-84) into the local Cartographic Reference System (for instance UTM-32, Gauss-Krueger, Oblique Mercator, etc.). The Figure shows the conversion steps included in this transform.





2.1.5 Geocoding

Some Basic Geodetic and Cartographic Nomenclature

Projection represents the 3-dimensional Earth's surface in a 2-dimensional plane.

Ellipsoid is the mathematical description of the Earth's shape.

Ellipsoidal Height is the vertical distance above the reference ellipsoid and is measured along the ellipsoidal normal from the point to the ellipsoid.

Geoid is the Earth's level surface. The geoid would have the shape of an oblate ellipsoid centred on the Earth's centre of mass, if the Earth was of uniform density and the Earth's topography did not exist.

Orthometric Height is the vertical distance above the geoid and is measured along the plumb line from the point to the geoid.

Topography is the Earth's physical surface.


Datum Shift Parameters convert the ellipsoid's origin into the Earth's centre.





2.1.5 Geocoding

Ellipsoidal Geocoding - ENVISAT ASAR AP (HH) Mode

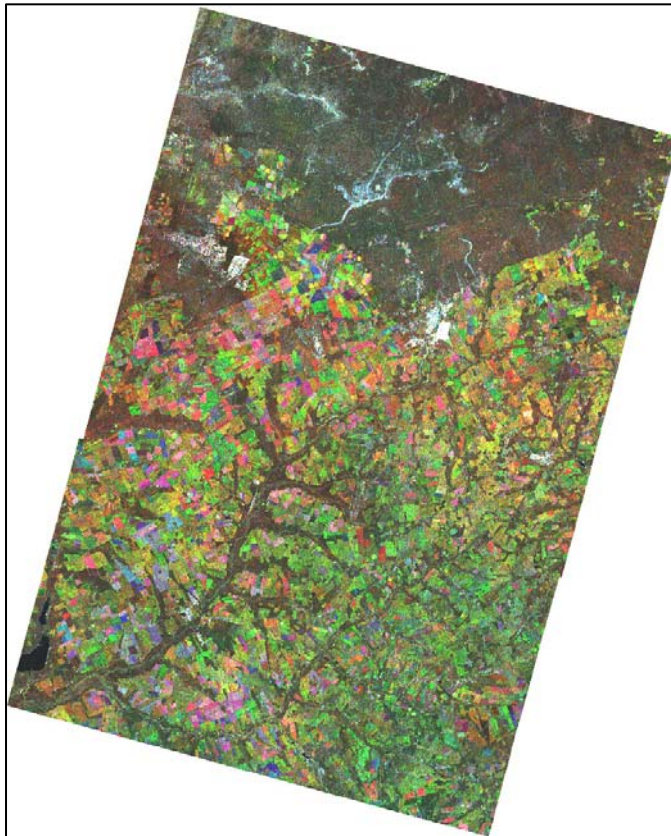


The picture shows three ENVISAT ASAR AP (HH polarization) images from the area of Lichtenburg (South Africa) acquired at different dates. The images, which have a pixel spacing of 15 m, have been focused, multi-looked, co-registered, speckle filtered using a multi-temporal (De Grandi) filter, and finally ellipsoidal geocoded in the WGS-84, UTM zone 35 reference system. The ellipsoidal geocoding using a reference height has been performed in a nominal way based on precise orbits from the DORIS (Doppler Orbitography and Radiopositioning Integrated by Satellite) system.





2.1.5 Geocoding

Terrain Geocoding - ERS-2 SAR

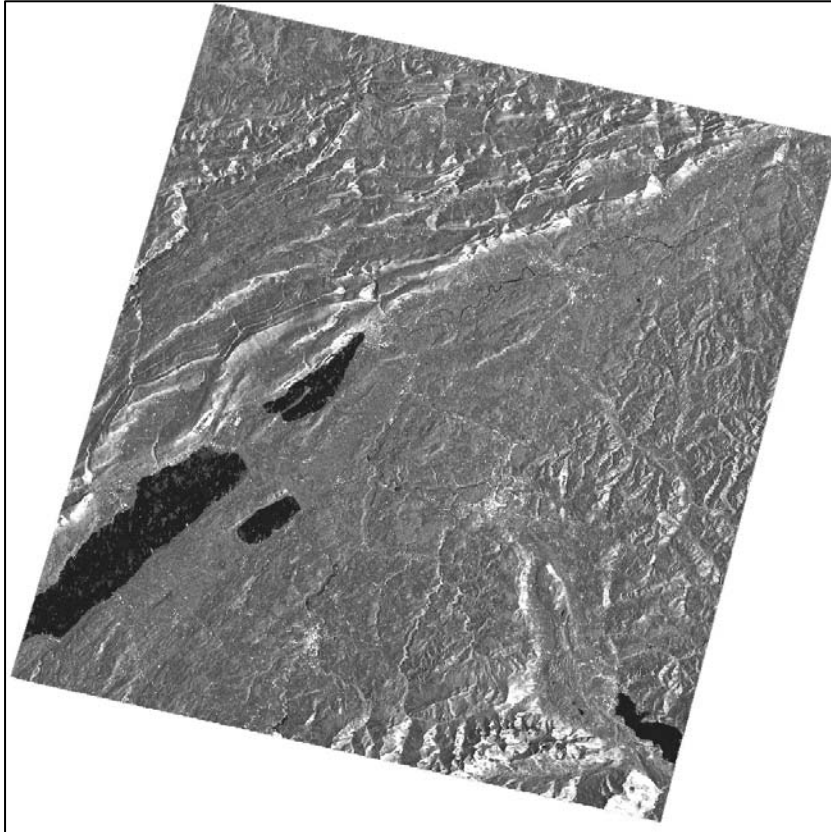


The picture shows an ERS-2 SAR image of the Bern area (Switzerland). This image has been focused, multi-looked, speckle filtered using a Gamma-Gamma MAP filter, and finally terrain geocoded in the Oblique Mercator (Bessel 1814 ellipsoid) reference system. The terrain geocoding using a high resolution Digital Elevation Model (DEM) has been performed in a nominal way using precise orbits of the DORIS system.





2.1.5 Geocoding

Ellipsoidal Geocoding - ERS-2 SAR

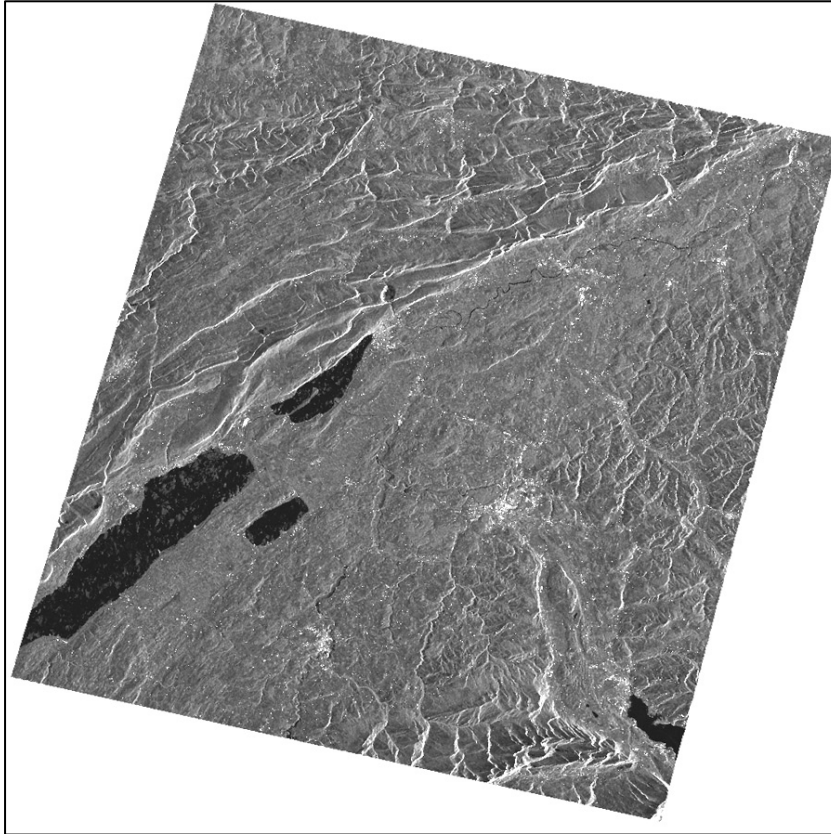


The picture shows an ERS-2 SAR image of the Bern area (Switzerland). The image has been focused, multi-looked, speckle filtered using a Gamma-Gamma MAP filter, and ellipsoidal geocoded in the Oblique Mercator (Bessel 1814 ellipsoid) reference system. The ellipsoidal geocoding using a (constant) reference height has been performed in a nominal way using precise orbits of the DORIS system. Note the location inaccuracies - due to the lack of the DEM information - with respect to the terrain geocoded image. Compare this image with the corresponding terrain geocoded one.





2.1.5 Geocoding

SARscape® - Basic Module

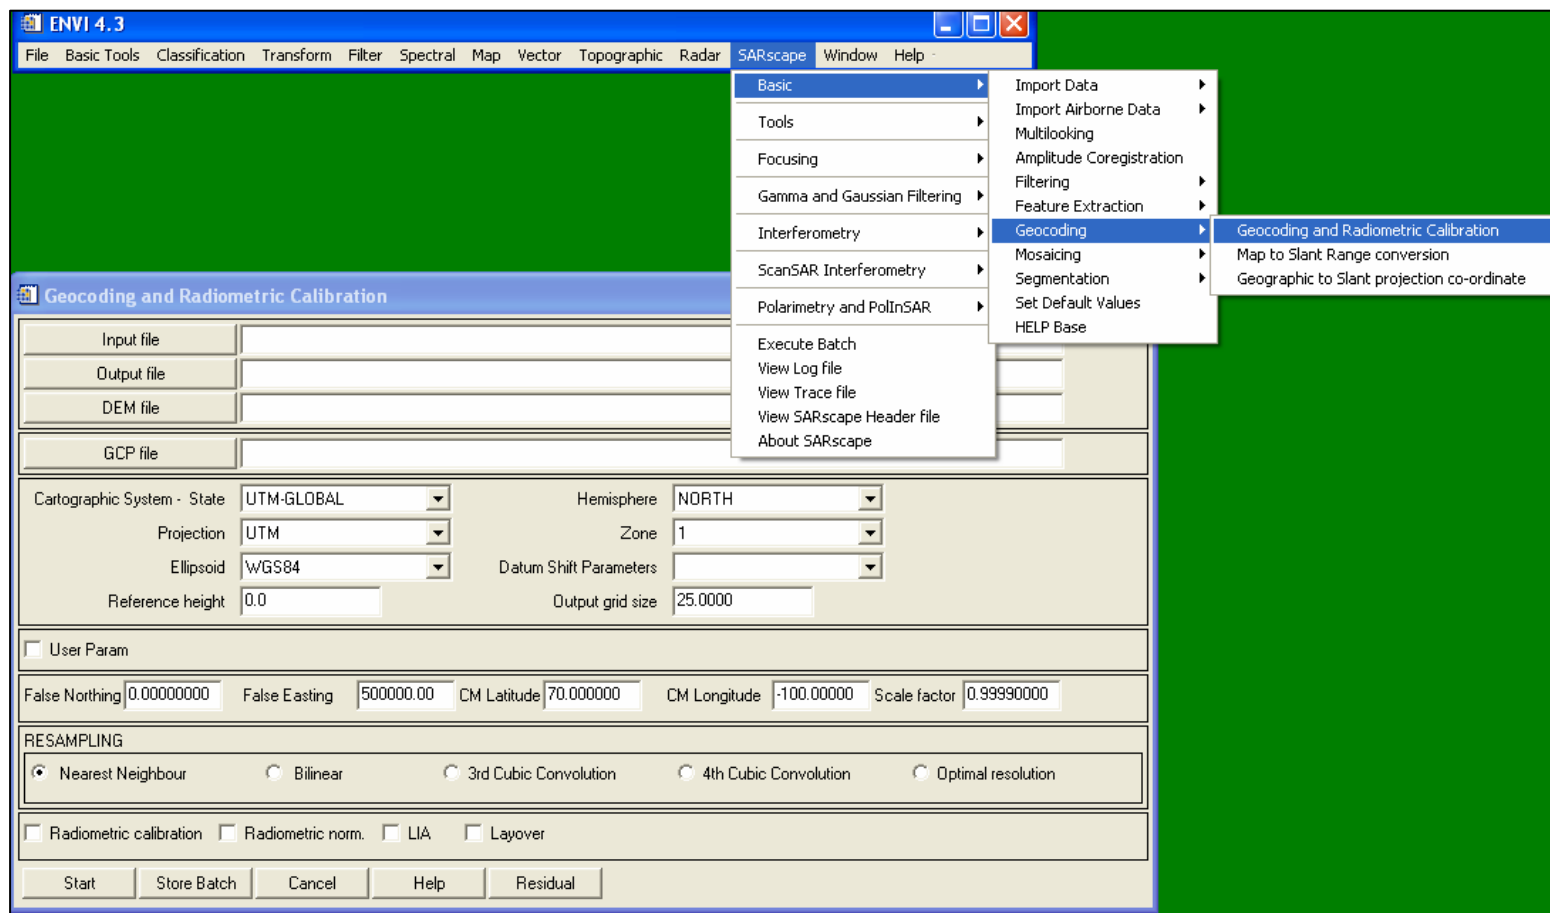

The screenshot shows the ENVI 4.3 SARscape interface. The 'SARscape' menu is open, highlighting the 'Geocoding' option. The 'Geocoding and Radiometric Calibration' dialog box is displayed, showing various parameters for geocoding and radiometric calibration.

Geocoding and Radiometric Calibration Dialog Box Parameters:

- Input file: [Empty]
- Output file: [Empty]
- DEM file: [Empty]
- GCP file: [Empty]
- Cartographic System - State: UTM-GLOBAL
- Projection: UTM
- Ellipsoid: WGS84
- Reference height: 0.0
- Hemisphere: NORTH
- Zone: 1
- Datum Shift Parameters: [Empty]
- Output grid size: 25.0000
- User Param:
- False Northing: 0.00000000
- False Easting: 500000.00
- CM Latitude: 70.000000
- CM Longitude: -100.00000
- Scale factor: 0.99990000
- RESAMPLING:
 - Nearest Neighbour
 - Bilinear
 - 3rd Cubic Convolution
 - 4th Cubic Convolution
 - Optimal resolution
- Radiometric calibration
- Radiometric norm.
- LIA
- Layover

Buttons at the bottom: Start, Store Batch, Cancel, Help, Residual.





2.1.6 Radiometric Calibration

Purpose

Radars measure the ratio between the power of the pulse transmitted and that of the echo received. This ratio is called the backscatter. Calibration of the backscatter values is necessary for intercomparison of radar images acquired with different sensors, or even of images obtained by the same sensor if acquired in different modes or processed with different processors.

In order to avoid misunderstanding, note the following nomenclature:

- **Beta Nought (β°)** is the radar brightness (or reflectivity) coefficient. The reflectivity per unit area in slant range is dimensionless. This normalization has the virtue that it does not require knowledge of the local incidence angle (e.g. scattering area A).
- **Sigma Nought (σ°)**, the backscattering coefficient, is the conventional measure of the strength of radar signals reflected by a distributed scatterer, usually expressed in dB. It is a normalized dimensionless number, which compares the strength observed to that expected from an area of one square metre. Sigma nought is defined with respect to the nominally horizontal plane, and in general has a significant variation with incidence angle, wavelength, and polarization, as well as with properties of the scattering surface itself.
- **Gamma (γ)** is the backscattering coefficient normalized by the cosine of the incidence angle.





2.1.6 Radiometric Calibration

The Radar Equation

The radiometric calibration of the SAR images involves, by considering the radar equation law, corrections for:

- The scattering area (A): each output pixel is normalised for the actual illuminated area of each resolution cell, which may be different due to varying topography and incidence angle.
- The antenna gain pattern (G^2): the effects of the variation of the antenna gain (the ratio of the signal, expressed in dB, received or transmitted by a given antenna as compared to an isotropic antenna) in range are corrected, taking into account topography (DEM) or a reference height.
- The range spread loss (R^3): the received power must be corrected for the range distance changes from near to far range.





2.1.6 Radiometric Calibration

The Radar Equation (cont.)

The base of the radiometric calibration is the radar equation. The formulation of the received power for distributed scatters P_d for a scattering area A can be written as:

$$P_d = \frac{P_t \cdot G_t^A(\theta_{el}, \theta_{az}) \cdot G_r^A(\theta_{el}, \theta_{az}) \cdot \lambda^3 \cdot G_r^E \cdot G_p \cdot \sigma^o \cdot \frac{p_r \cdot p_a}{\sin\theta_{ir} \cdot \cos\theta_{ia}}}{(4\pi)^3 \cdot R^3 \cdot L_s \cdot L_a} + P_n$$

Antenna Gain Pattern

Range Spread Loss

Scattering Area A

where: P_d = received power for distributed scatters

P_t = transmitted power

P_n = additive noise

p_r = image pixel dimension in range

p_a = image pixel dimension in azimuth

G^A = transmitted and received antenna gain

G^E = electronic gain in radar receiver

G_p = processor constant

L_a = atmosphere attenuation

L_s = system loss term

θ_{el} = antenna elevation angle

θ_{az} = antenna azimuth angle

θ_{ir} = local incidence angle in range


θ_{ia} = local incidence angle in azimuth





2.1.6 Radiometric Calibration

Backscattering Coefficient - ERS-2 SAR

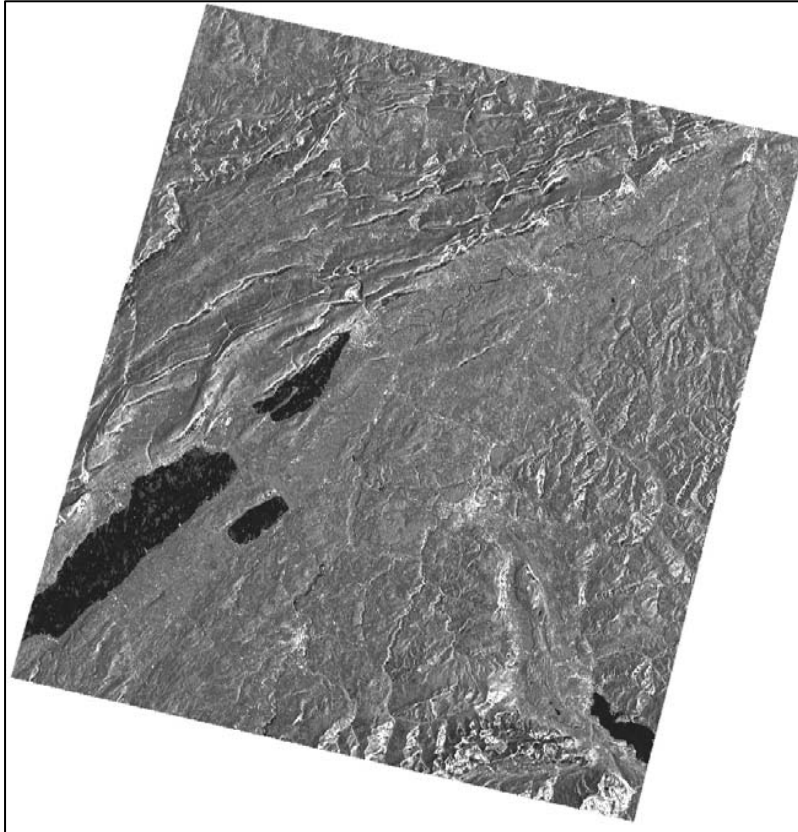


The picture shows the backscattering coefficient (σ^0) estimated from an ERS-2 SAR image of the Bern area (Switzerland). The image has been focused, multi-looked, speckle filtered using a Gamma-Gamma MAP filter, and finally terrain geocoded in the Oblique Mercator (Bessel 1814 ellipsoid) reference system. The radiometric calibration has been performed during the terrain geocoding procedure. Note that a rigorous radiometric calibration can be exclusively carried out using DEM data, which allows the correct calculation of the scattering area. Compare this image with the corresponding terrain geocoded (but not radiometrically calibrated) one in the previous slide.





2.1.6 Radiometric Calibration

Local Incidence Angle Map

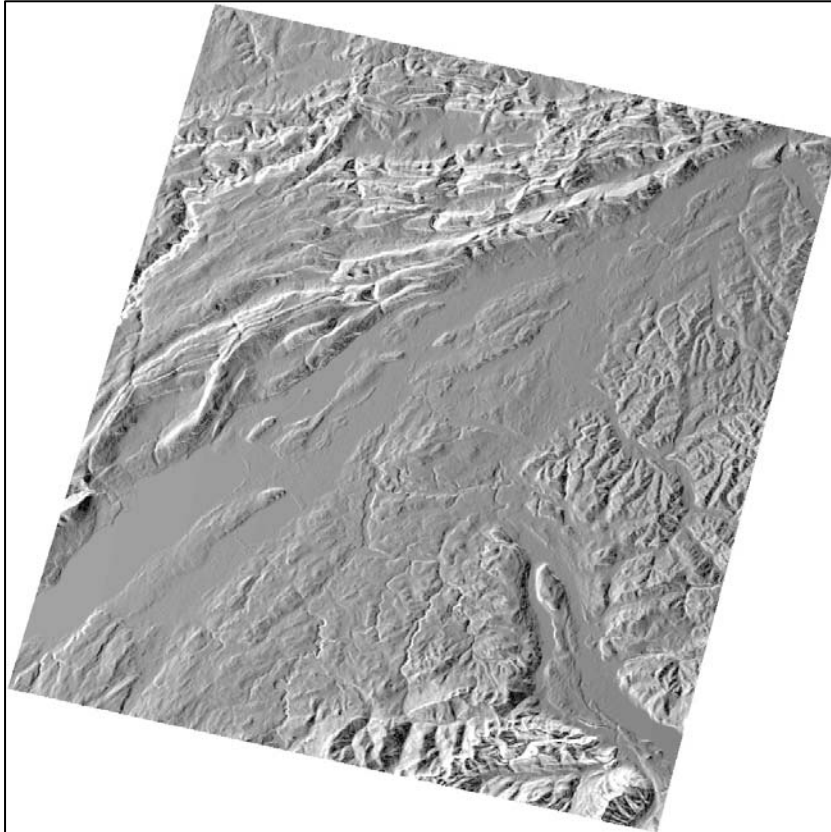


The picture shows the local incidence angle map (e.g. the angle between the normal of the backscattering element and the incoming radiation). This direction results from the satellite's position vector and the position vector of the backscattering element. The grey tones correspond to the angle and achieve the brightest tones in areas close to shadow. The darkest tones corresponds to areas close to layover. Note that the local incidence angle map is used to calculate the effective scattering area A .





2.1.6 Radiometric Calibration

Layover and Shadow Map

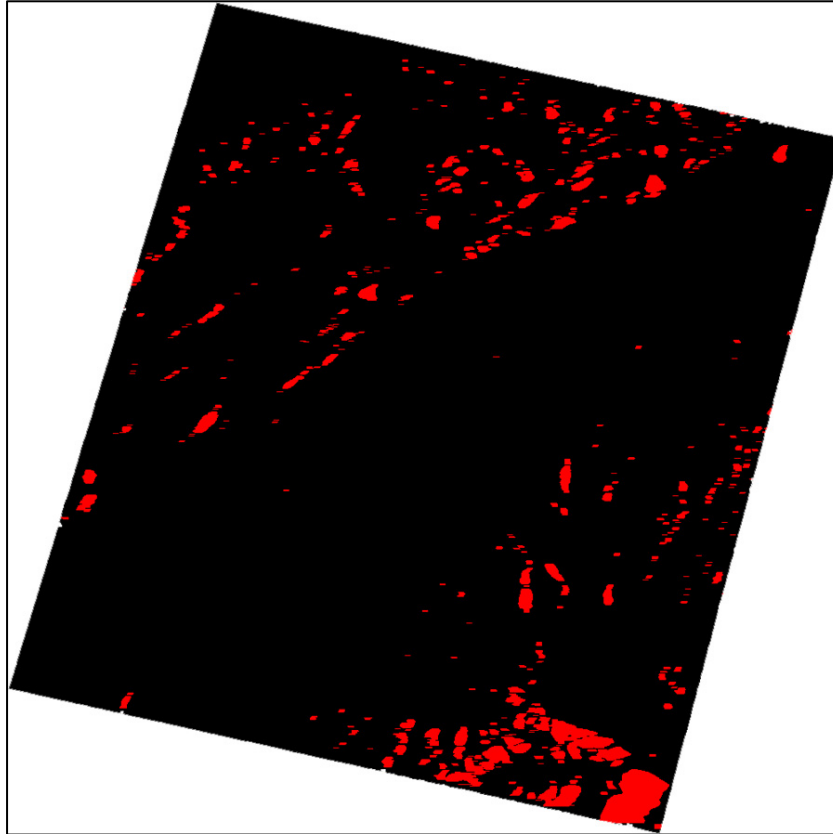

The picture shows, in red, the areas of layover for the ERS-2 SAR image from the area of Bern (Switzerland). Note that from a thematic point of view these areas cannot be used to extract information, since the radar energy is compressed to a few resolution cells only. Furthermore, in these areas the local spatial resolution tends to the infinite. It has to be pointed out that the calculation of a layover and shadow map can only be carried out by using a high resolution Digital Elevation Model (DEM). In this case no shadow areas exist due to the steep incidence angle.





2.1.6 Radiometric Calibration

SARscape® - Basic Module

The screenshot shows the ENVI 4.3 SARscape software interface. The 'SARscape' menu is open, and the 'Geocoding and Radiometric Calibration' option is selected. The dialog box for this option is displayed, showing various configuration parameters:

- Input file:** [Empty text box]
- Output file:** [Empty text box]
- DEM file:** [Empty text box]
- GCP file:** [Empty text box]
- Cartographic System - State:** UTM-GLOBAL
- Projection:** UTM
- Ellipsoid:** WGS84
- Reference height:** 0.0
- Hemisphere:** NORTH
- Zone:** 1
- Datum Shift Parameters:** [Empty dropdown]
- Output grid size:** 25.0000
- User Param:** (unchecked)
- False Northing:** 0.00000000
- False Easting:** 500000.00
- CM Latitude:** 70.000000
- CM Longitude:** -100.000000
- Scale factor:** 0.99990000
- RESAMPLING:**
 - Nearest Neighbour
 - Bilinear
 - 3rd Cubic Convolution
 - 4th Cubic Convolution
 - Optimal resolution
- Radiometric calibration:** (checked and circled in red)
- Radiometric norm:** (unchecked)
- LIA:** (unchecked)
- Layover:** (unchecked)

Buttons at the bottom of the dialog include: Start, Store Batch, Cancel, Help, and Residual.






2.1.7 Radiometric Normalization

Purpose

Even after a rigorous radiometric calibration, backscattering coefficient variations are clearly identifiable in the range direction. This is because the backscattered energy of the illuminated objects is dependent on the incidence angle. In essence, the smaller the incidence angle and the wider the swath used to acquire an image, the stronger the variation of the backscattering coefficient in the range direction. Note that this variation represents the intrinsic property of each object, and thus may not be corrected.

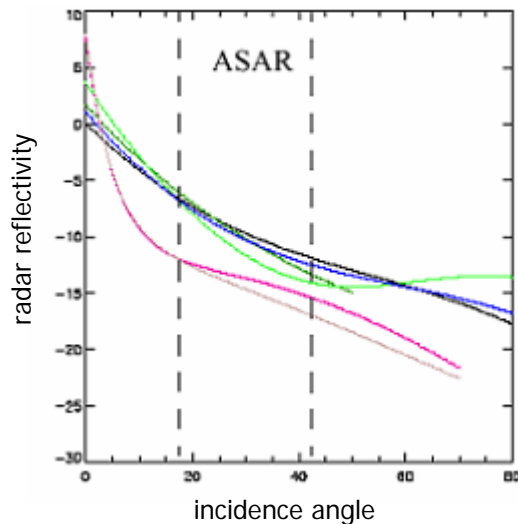

This plot shows the backscattering variation for different land cover classes (colours), while the dashed lines highlight the swath range for ENVISAT ASAR data.


In order to equalize these variations usually a modified cosine correction is applied.





2.1.7 Radiometric Normalization

Backscattering Coefficient - ENVISAT ASAR Wide Swath

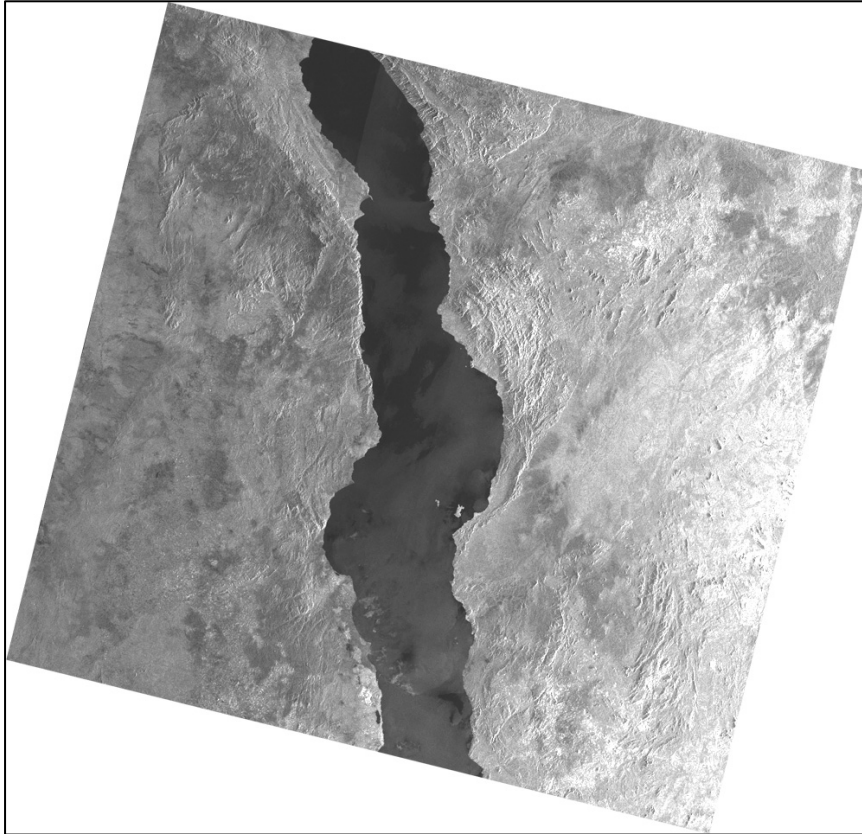

The picture shows the backscattering coefficient (σ^0) estimated from an ENVISAT ASAR Wide Swath mode image (405 km swath) from the area of Malawi (Africa). The image, which has a pixel spacing of 150 m, has been focused, multi-looked, speckle filtered using a Gamma-Gamma MAP filter, terrain geocoded in the WGS-84 (UTM zone 36 reference system), and radiometrically calibrated. Note the strong brightness variations from near (left) to far range (right).





2.1.7 Radiometric Normalization

Normalized Backscattering Coefficient - ENVISAT ASAR Wide Swath



The picture shows the normalized backscattering coefficient (σ^0) estimated from an ENVISAT ASAR Wide Swath mode image (405 km swath) from the area of Malawi (Africa). The image, which has a pixel spacing of 150m, has been focused, multi-looked, speckle filtered using a Gamma-Gamma MAP filter, terrain geocoded in the WGS-84 (UTM zone 36 reference system), and radiometrically calibrated. Note the brightness homogeneity after the radiometric normalization procedure.





2.1.7 Radiometric Normalization

Backscattering Coefficient - ENVISAT ASAR Global Mode




The picture shows the backscattering coefficient (σ^0) estimated from an ENVISAT ASAR Global Mode image (405km swath) from an area covering the Ivory Coast, Mali, Burkina Faso, and Mauritania (Africa). The image, which has a pixel spacing of 1 km, has been focused, multi-looked, speckle filtered using a Gamma-Gamma MAP filter, ellipsoidal geocoded in the WGS-84 (geographic reference system), and finally radiometrically calibrated. Note the strong brightness variations from near (right) to far range (left).





2.1.7 Radiometric Normalization

Normalized Backscattering Coefficient - ENVISAT ASAR Global Mode

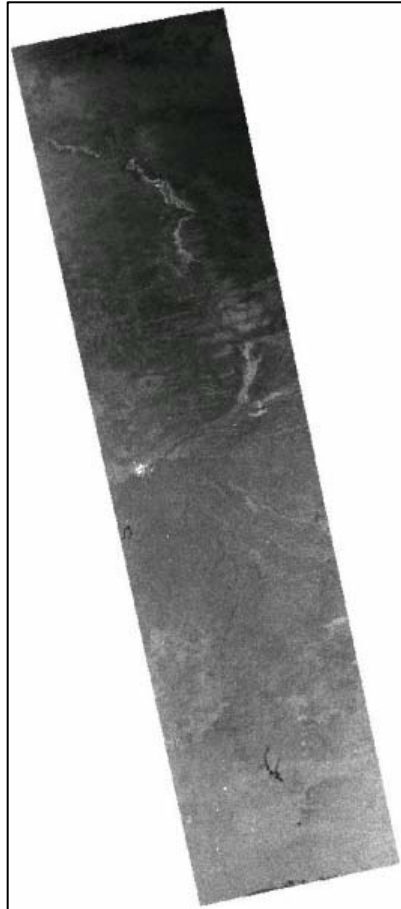

The picture shows the normalized backscattering coefficient (σ^0) estimated from an ENVISAT ASAR Global Mode image (405 km swath) of an area covering the Ivory Coast, Mali, Burkina Faso, and Mauritania (Africa). The image, which has a pixel spacing of 1km, has been focused, multi-looked, speckle filtered using a Gamma-Gamma MAP filter, ellipsoidal geocoded in the WGS-84 (geographic reference system), and finally radiometrically calibrated. Note the brightness homogeneity after the radiometric normalization procedure.





2.1.7 Radiometric Normalization

SARscape® - Basic Module

The screenshot shows the ENVI 4.3 SARscape software interface. The 'SARscape' menu is open, and the 'Geocoding and Radiometric Calibration' option is selected. The dialog box for this option is displayed, showing various configuration parameters:

- Input file:** [Empty text box]
- Output file:** [Empty text box]
- DEM file:** [Empty text box]
- GCP file:** [Empty text box]
- Cartographic System - State:** UTM-GLOBAL (dropdown)
- Hemisphere:** NORTH (dropdown)
- Projection:** UTM (dropdown)
- Zone:** 1 (dropdown)
- Ellipsoid:** WGS84 (dropdown)
- Datum Shift Parameters:** [Empty dropdown]
- Reference height:** 0.0 (text box)
- Output grid size:** 25.0000 (text box)
- User Param**
- False Northing:** 0.00000000 (text box)
- False Easting:** 500000.00 (text box)
- CM Latitude:** 70.000000 (text box)
- CM Longitude:** -100.00000 (text box)
- Scale factor:** 0.99990000 (text box)
- RESAMPLING:**
 - Nearest Neighbour
 - Bilinear
 - 3rd Cubic Convolution
 - 4th Cubic Convolution
 - Optimal resolution
- Radiometric calibration**
- Radiometric norm.** (circled in red)
- LIA
- Layover

Buttons at the bottom of the dialog include: Start, Store Batch, Cancel, Help, and Residual.





2.1.8 Mosaicing

Purpose

Terrain geocoded, radiometrically calibrated, and radiometrically normalized backscattering coefficient (σ^0) data acquired over different satellite paths/tracks are usually mosaiced, making it possible to cover large areas (country to continental level) - usually with data of high spatial resolution.


It is worth mentioning that the monostatic nature of the system and the penetration capabilities through the clouds means that it is not necessary to correct for sun inclination or atmospheric variations. This is the great advantage of SAR over optical sensors, primarily because large areas with the same illumination geometry can be imaged exactly in the same way regardless of weather conditions or seasonal variations in sun angle. This greatly facilitates the detection of land cover changes.





2.1.8 Mosaicing

Central Africa imaged by JERS-1 SAR data

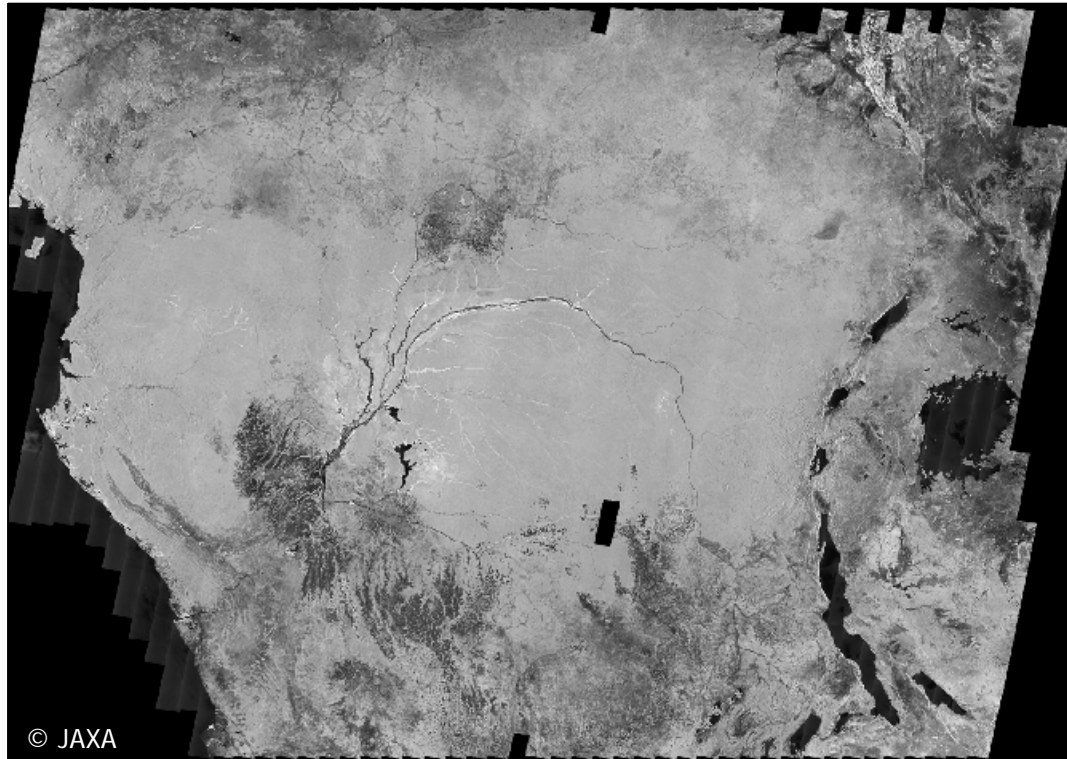

Mosaic of 1250 JERS-1 SAR ellipsoidal geo-coded images of Central Africa. Note that the mosaicing procedure has been completely automatic. The mosaicing followed ellipsoidal geocoding of each single high resolution scene, and was obtained using the following methodology:


- The amplitude ratio is estimated between neighbouring images in the overlapping area.
- The correction factors are obtained by means of a global optimization.





2.1.8 Mosaicing

SARscape® - Basic Module

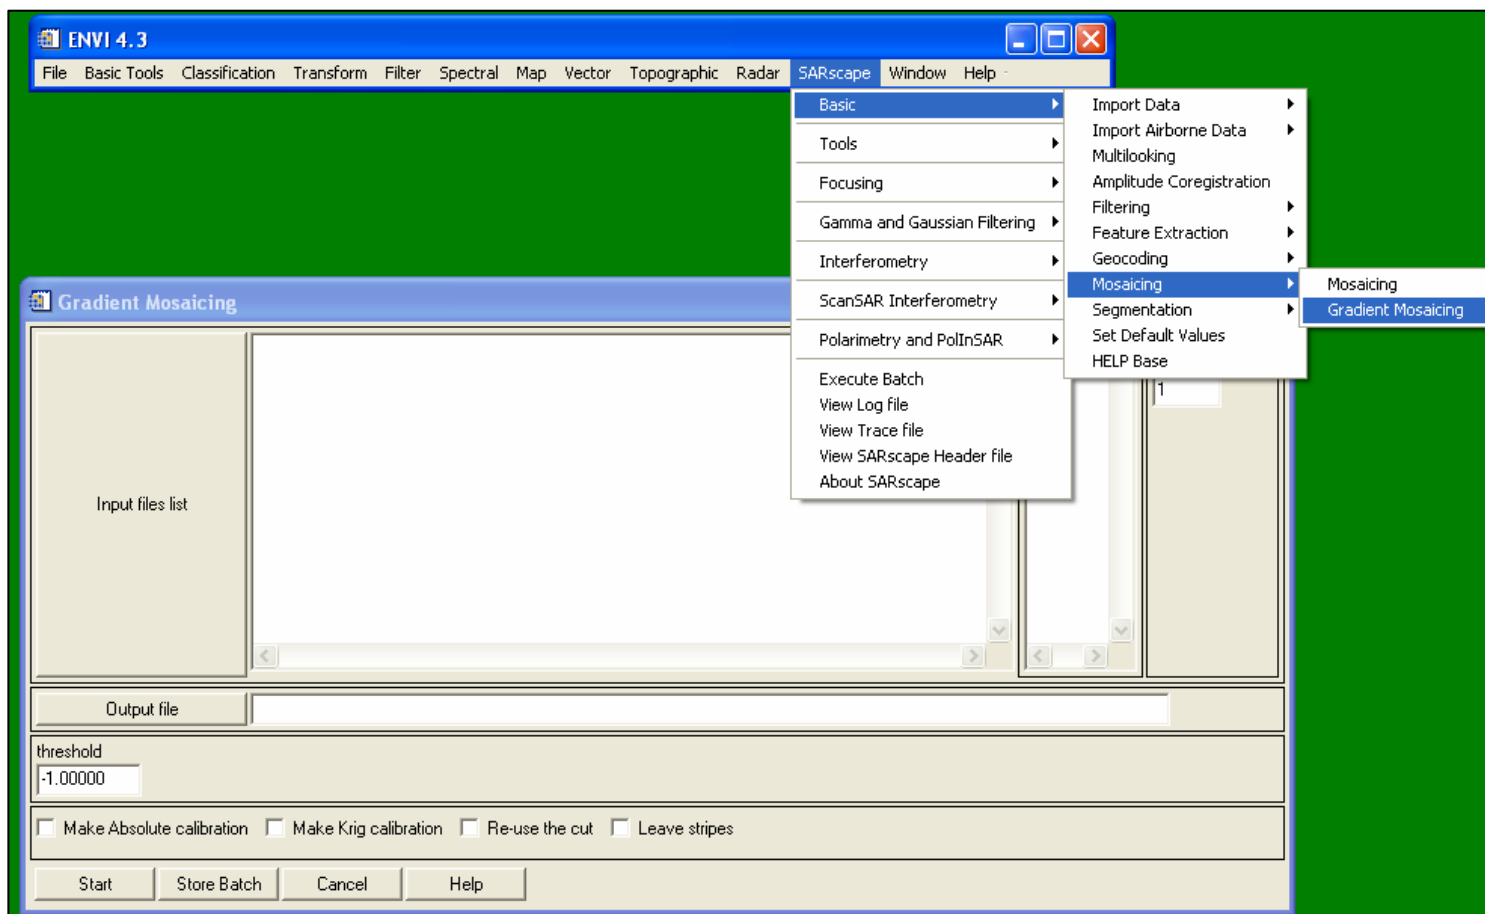



2.1.9 Segmentation

Purpose

Segmentation assumes that images are made up of regions, separated by edges, in which the radar reflectivity is constant. The number and position of these segments and their mean values are unknown and must be determined from the data. Instead of attempting to reconstruct an estimate of the radar reflectivity for each pixel, segmentation seeks to overcome speckle by identifying regions of constant radar reflectivity.

In the following sections selected algorithms are shortly presented.





2.1.9 Segmentation

Edge Detection

The principle selected is derived from the Canny edge detector. The advantage of this algorithm is that it does not rely on statistical a-priori on regions distributions and it is purely based on an analytical scheme for detecting contours. Moreover, such a detector is valid for all possible edge orientations and subject to a limited number parameter estimation.

For single image, the Canny edge detector consists in the sequential execution of five steps. First the image is smoothed to eliminate and noise. It then finds the image gradient to highlight regions with high spatial derivatives. The algorithm then tracks along these regions and suppresses any pixel that is not at the maximum (non-maximum suppression) in the gradient direction. The gradient array is further reduced by hysteresis thresholding.

In order to process vector-valued data, the algorithm presented for single image is extended using the similar approach used for vector-valued diffusion filtering. In the vector-valued data case, the main difference with original Canny lies in the computation of the direction and magnitude of gradient.






2.1.9 Segmentation

Edge Detection - Example


Edge detection is applied in conjunction with the anisotropic non-linear diffusion filter. The two images on the top show intensity data after the multi-temporal anisotropic non-linear diffusion filtering step. In the two images on the bottom, the multi-temporal edge map obtained with the Canny extension has been superposed to the original unfiltered intensities images.

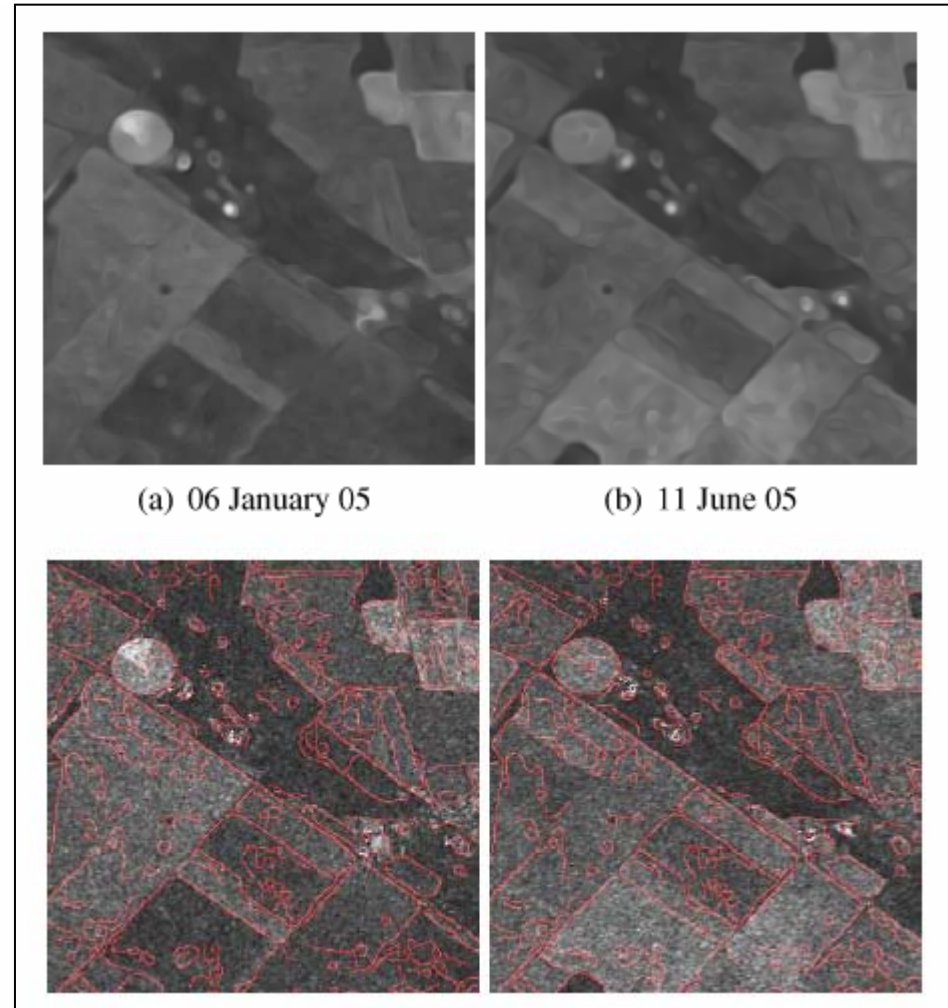



2.1.9 Segmentation

SARscape® - Basic Module

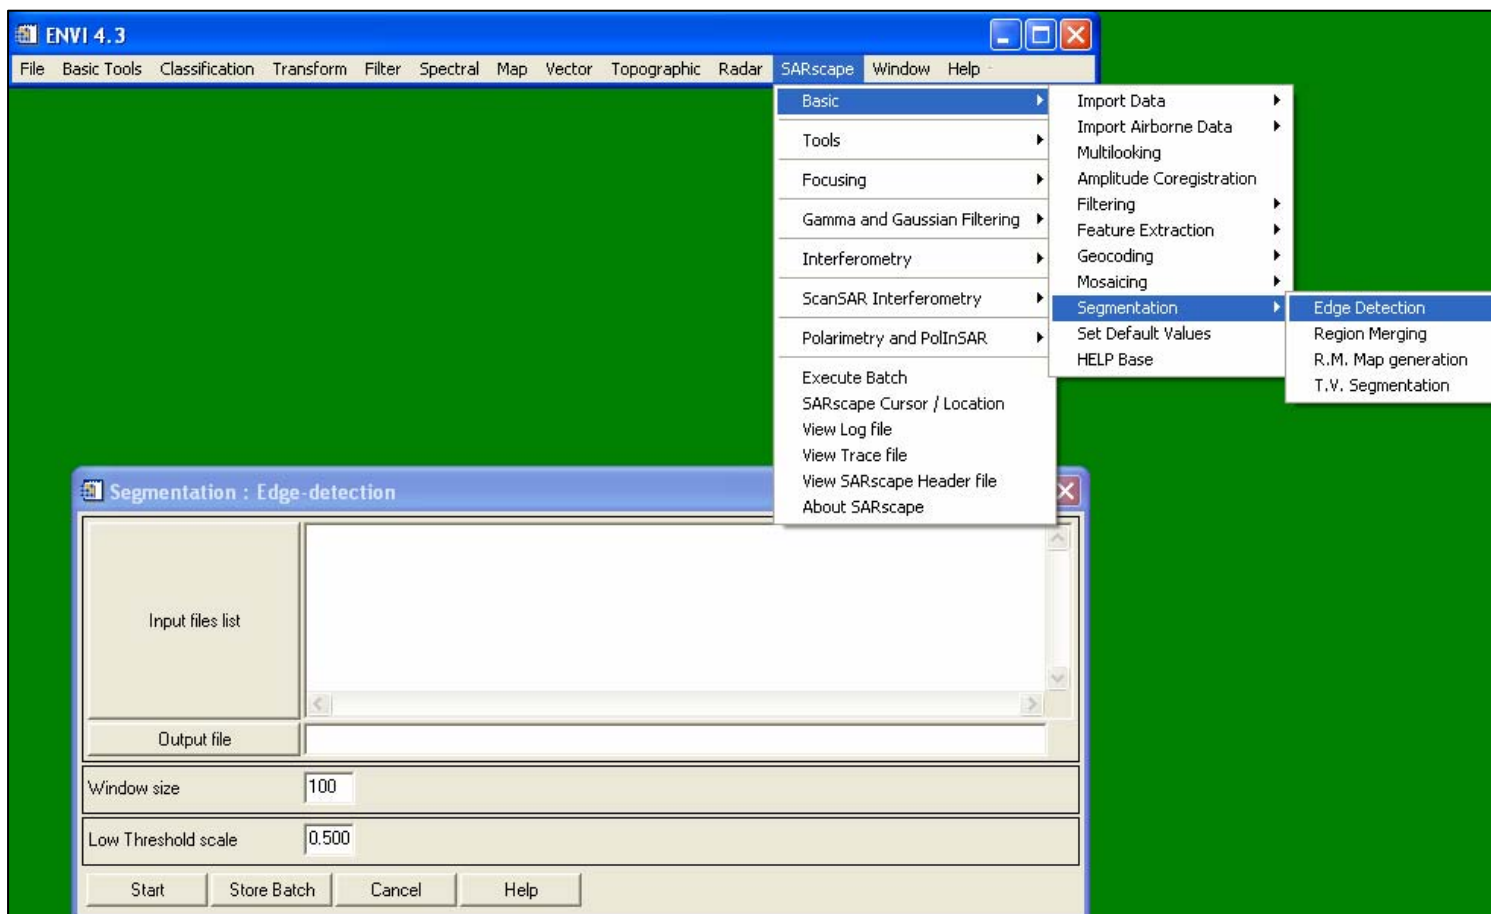



2.1.9 Segmentation

Region Segmentation

The approach is based on an hypothetical image coding scheme that decomposes a given image into homogeneous segments and encodes these segments independently of each other. Such an approach also supports situations in which the encoder and the decoder have some common information about the image, i.e. in our case an edge map extracted from the filtered images, to improve segmentation. Thus, the entire coding procedure can be then described as a two-part source channel coding with side information. The final region delineation is achieved by a region growing step satisfying the minimum code length constraint described.

The final step for achieving the required segmentation is to find the segmentation corresponding to a minimal cost with the previous equation. To this end, a region growing stage is taken. First, images are divided in one-pixels wide distinct regions. Then, all the merging costs between 4-connected regions are computed and stored in a list. Hence, the merging operation corresponding to the lower cost can be selected. Finally, the merge list is updated. The only parameter intervening here is the number of merge operations to perform. This is a crucial matter as it defines the final scale for segmentation.






2.1.9 Segmentation

Region Segmentation - Example


The Figure below shows the segmentation images multi-temporal segmentation achieved at two scales, namely with 150 and 250 segments respectively.

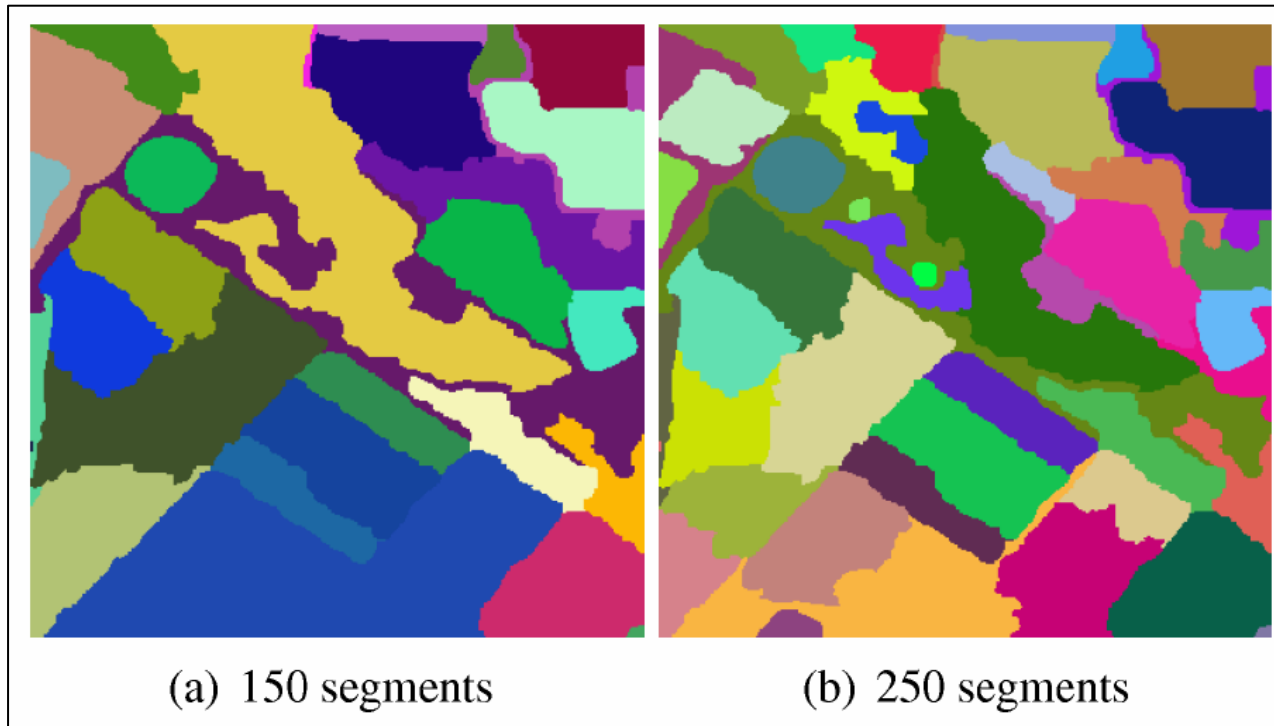



2.1.9 Segmentation

SARscape® - Basic Module

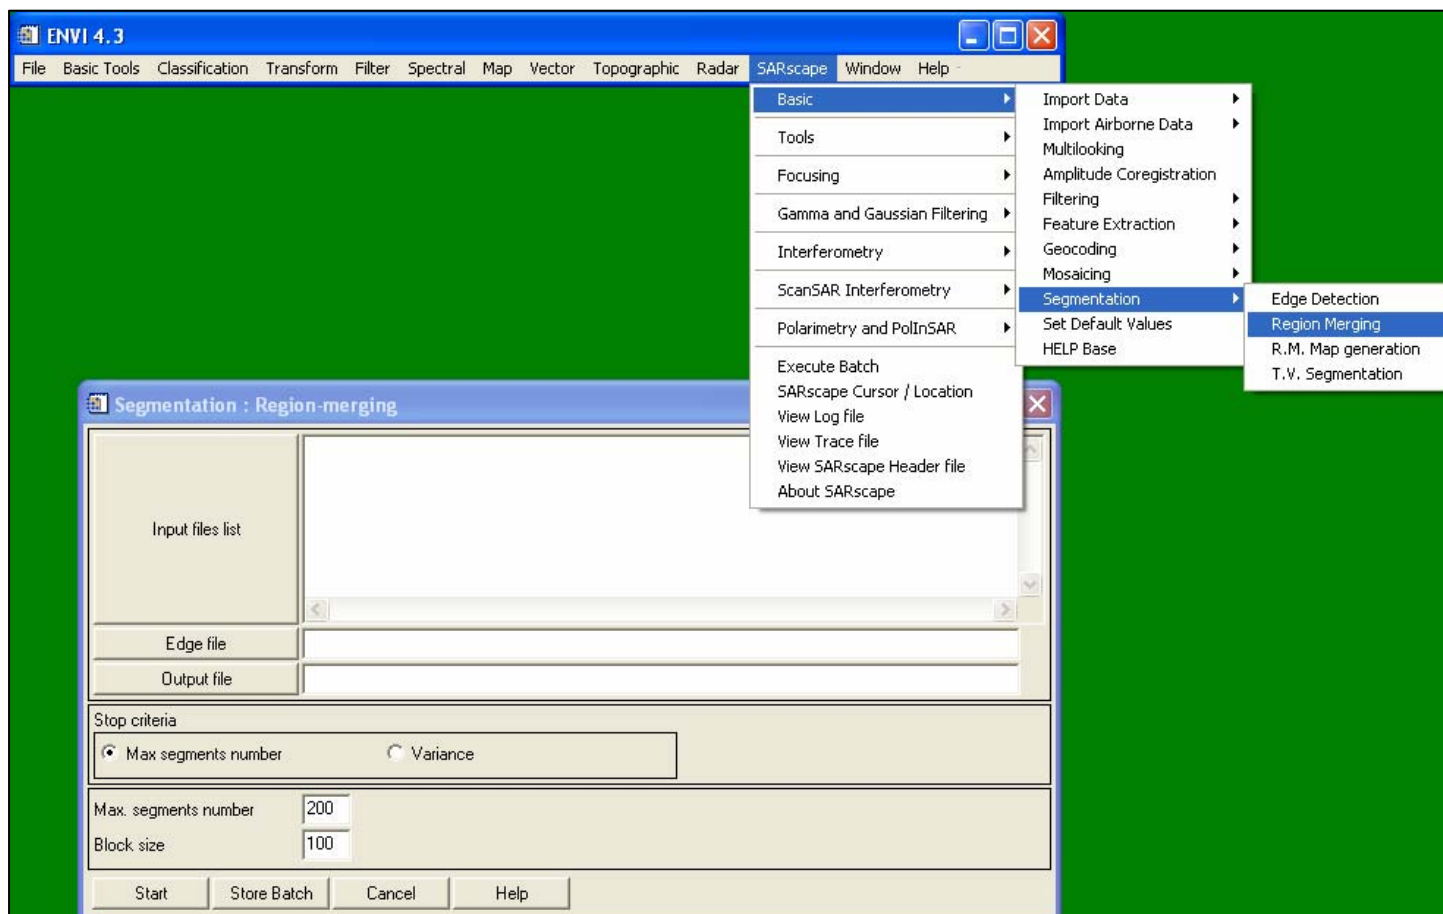



2.1.9 Segmentation

Time Varying Segmentation

After the multi-temporal region growing step a common edge and segmentation map is available. However, such global maps are not appropriate, if single-date specific changes (i.e. anomalies) should be identified. In order to fully exploit the multi-image segmentation, global region maps are considered as a starting point and process each segment obtained separately using the single-image information.

Shortly summarized single-date specific changes are obtained by:

1. Consider each region R at each date.
2. Estimate the number of classes by means of the Expectation Maximization algorithm.
3. Segment R using an agglomerative segmentation process using the optimal number of classes founded.
4. Time Varying Segmentation results from the union of identified segments in R .






2.1.9 Segmentation

Time Varying Segmentation - Example


The Figure below illustrates the result of the time varying segmentation algorithm for a particular area. The pictures on the top are the original unfiltered images, whereas those on the bottom are the time varying segmented ones.

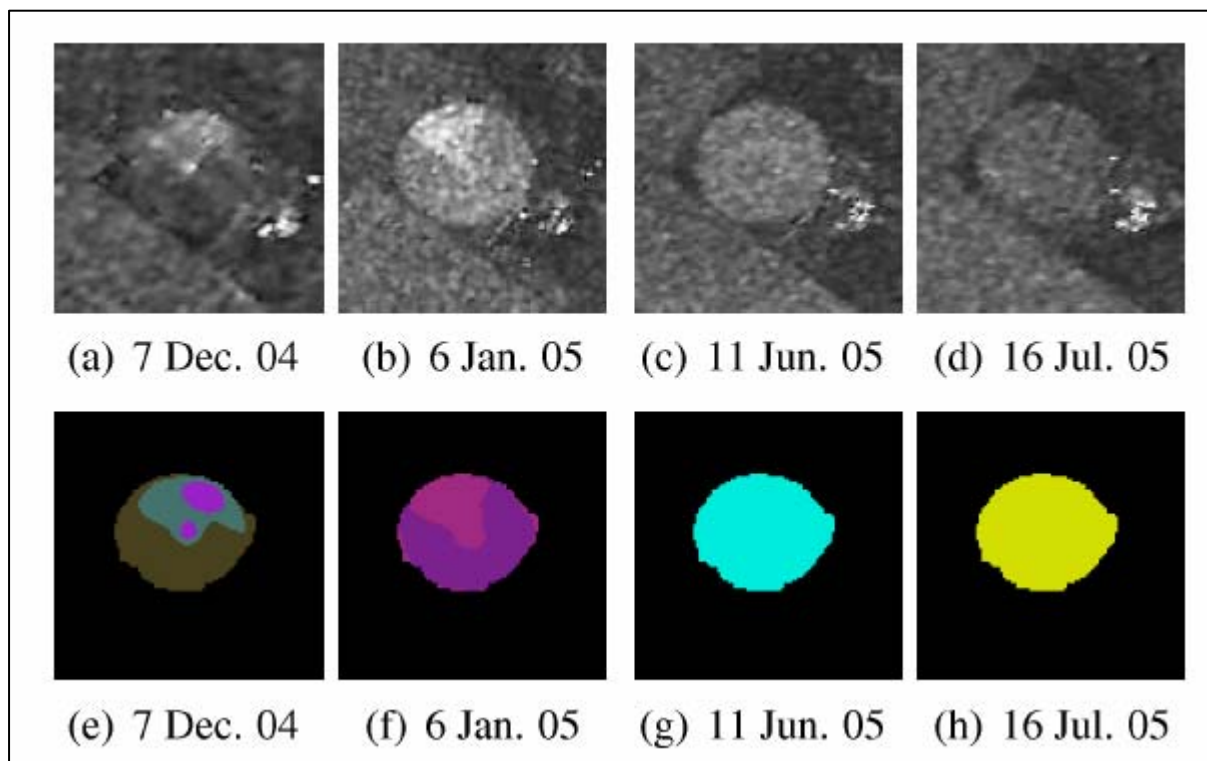



2.1.9 Segmentation

SARscape® - Basic Module

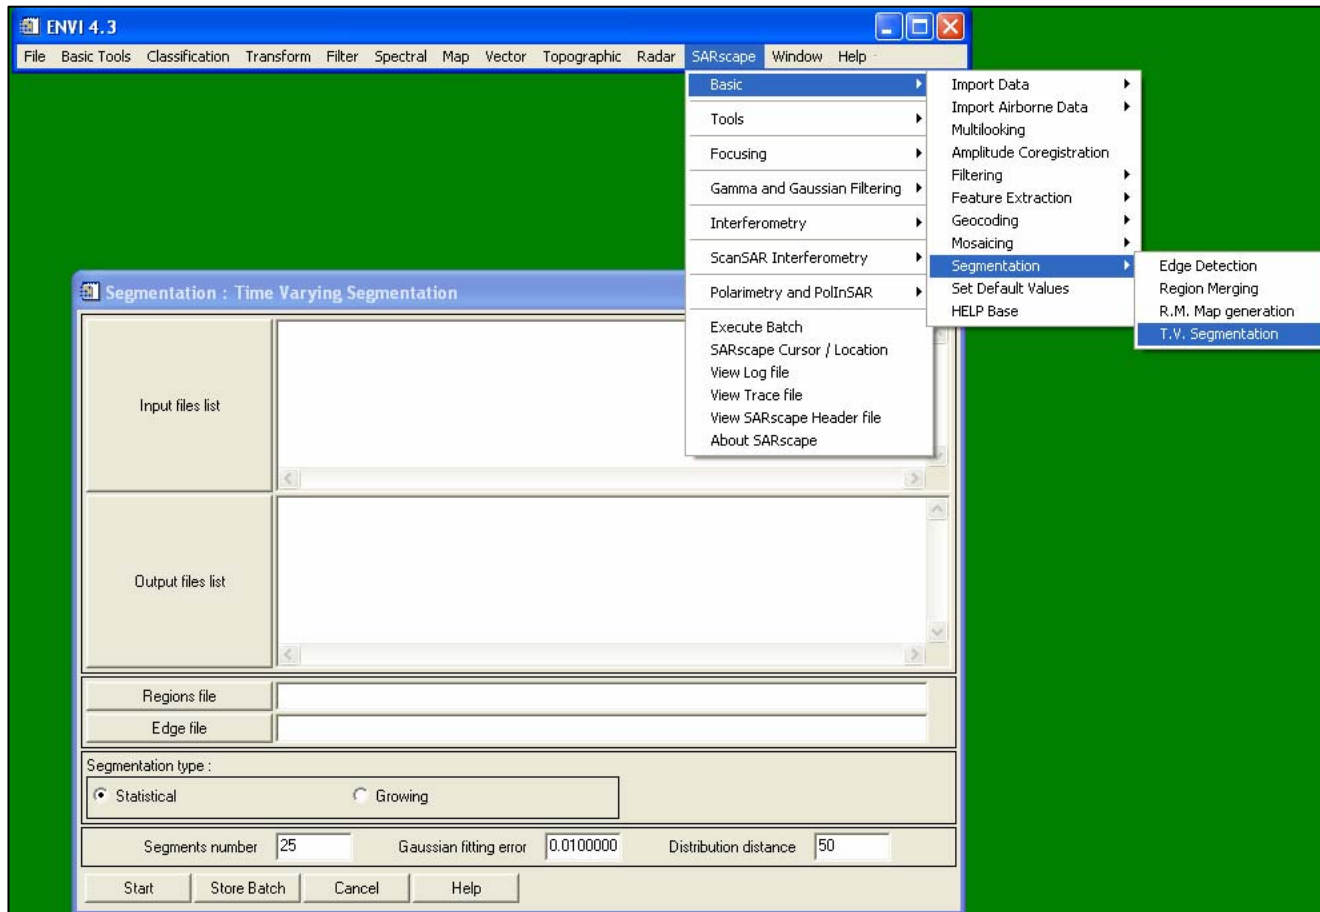



2.1.10 Classification

Purpose

The selection of a classification technique depends very much on the level of detail required in the resulting map. Whilst relatively simple classification algorithms and a choice of data sources may be used for maps containing a limited number of basic classes, more sophisticated algorithms must be used when more numerous and / or specific classes are selected, and not every data source may be suitable. This fact arises from the concept of classification itself: a class is often clear and understandable to a human user, but may be very difficult to define with objective parameters.

In the following sections selected algorithms are shortly presented.





2.1.10 Classification

Supervised or Unsupervised?

Looking at the existing classification algorithms, a first distinction may be made based on the involvement of an operator within the classification process, i.e.

- **Supervised Algorithms** require a human user that defines the classes expected as result of the classification and reference areas – training sets – that can be considered as representative of each class. In a similar way, an operator may define a set of rules that, if fulfilled, will result in a pixel assigned to one of the possible classes.
- **Unsupervised Algorithms** autonomously analyse the input data and automatically identify groups of pixels with similar statistical properties.






2.1.10 Classification

Supervised Classifiers - Overview

A variety of automated methods have been developed over the past two decades in order to classify Earth Observation data into distinct categories. Decision Trees, Maximum Likelihood (ML), which considers the appropriate Probability Density Functions, and Neural Networks (NN) have been proven to be the most useful (see Figure). Recently algorithms based on the principle of Support Vector Machines (non-parametric) have also shown a significant potential in this field.

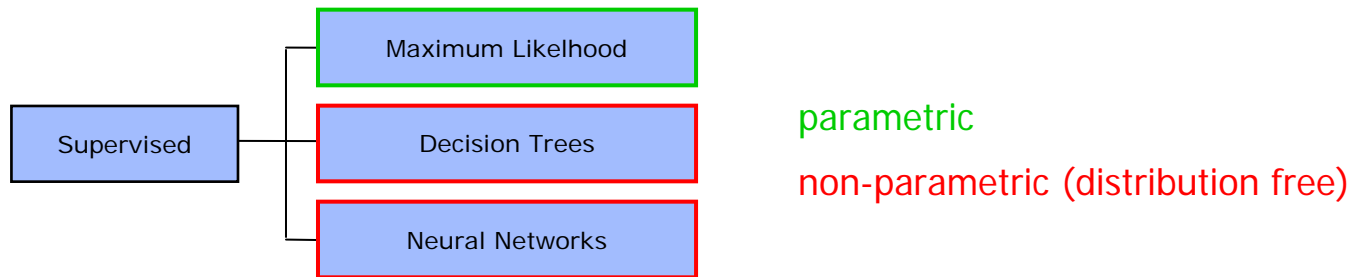

It is worth mentioning that over time ML and NN methods have been extended from a pixel based to a contextual (i.e. pixel neighbourhood information) approach by considering, for instance, Markov Random Fields (MRF), which provide a flexible mechanism for modelling spatial dependence.





2.1.10 Classification

Supervised Classifiers - Maximum Likelihood

Maximum Likelihood (ML) estimation is a mathematical expression known as the Likelihood Function of the sample data. Loosely speaking, the likelihood of a set of data is the probability of obtaining that particular set of data, given the chosen probability distribution model. This expression contains the unknown model parameters. The values of these parameters that maximize the sample likelihood are known as the Maximum Likelihood Estimates (MLE).

The advantages of this method are:

- ML provides a consistent approach to parameter estimation problems. This means that MLE can be developed for a large variety of estimation situations.
- ML methods have desirable mathematical and optimality properties. Specifically,
 - i) they become minimum variance unbiased estimators as the sample size increases; and
 - ii) they have approximate normal distributions and approximate sample variances that can be used to generate confidence bounds and hypothesis tests for the parameters.





2.1.10 Classification

Supervised Classifiers - Maximum Likelihood (cont.)

The disadvantages of this method are:

- The likelihood equations need to be specifically worked out for a given distribution and estimation problem. The mathematics is often non-trivial, particularly if confidence intervals for the parameters are desired.
- The numerical estimation is usually non-trivial.
- ML estimates can be heavily biased for small samples. The optimality properties may not apply for small samples.
- ML can be sensitive to the choice of starting values.





2.1.10 Classification

Supervised Classifiers - Decision Tree

Decision tree classification techniques have been successfully used for a wide range of classification problems. These techniques have substantial advantages for Earth Observation classification problems because of their flexibility, intuitiveness, simplicity, and computational efficiency. As a consequence, decision tree classification algorithms are gaining increased acceptance for land cover problems. For classification problems that utilise data sets that are both well understood and well behaved, classification tree may be defined solely on analyst expertise.

Commonly, the classification structure defined by a decision tree is estimated from training data using statistical procedures. Recently, a variety of works has demonstrated that decision tree estimates from training data using a statistical procedure provide an accurate and efficient methodology for land cover classification problems in Earth Observation. Further, they require no assumption regarding the distribution of input data and also provide an intuitive classification structure.





2.1.10 Classification

Supervised Classifiers - Neural Networks

NN are supervised classification techniques, which can model the complex statistical distribution - as in the SAR case - of the considered data in a proper way. The main characteristics of NN are

- A non-linear non-parametric approach capable of automatically fitting the complexity of the different classes
- Fast in the classification phase

Different models of NNs have been proposed. Among them, the most commonly used are the Multi-Layer Perceptron (MLP) and the Radial Basis Function (RBF) neural networks. Despite the MLPs neural networks trained with the error back-propagation (EBP) learning algorithm are the most widely used, they exhibit important drawbacks and limitations, such as:

- The slow convergence of the EBP learning algorithm
- The potential convergence to a local minimum
- The inability to detect that an input pattern has fallen in a region of the input space without training data





2.1.10 Classification

Supervised Classifiers - Neural Networks (cont.)

RBF Neural Networks overcome some of the above problems by relying on a rapid training phase and by presenting systematic low responses to patterns that fall in regions of the input space with no training samples. This property is very important because it is strongly related to the capability of rejecting critical input samples. Moreover, the simple and rapid training phase, makes the RBF neural networks an efficient and suitable tool also from the user point of view.

As previously mentioned, assuming that the geometrical resolution of the sensors is sufficiently high, the MRF technique can be additionally applied, giving a class label for each pixel that also considers the correlation among neighboring pixels. In this way, it is possible to obtain an improvement in the performances in terms of robustness, accuracy and reliability.





2.1.10 Classification

Unsupervised Classifiers - K-Means

K-Means unsupervised classification calculates initial class means evenly distributed in the data space then iteratively clusters the pixels into the nearest class using a minimum distance technique. Each iteration recalculates class means and reclassifies pixels with respect to the new means. All pixels are classified to the nearest class unless a standard deviation or distance threshold is specified, in which case some pixels may be unclassified if they do not meet the selected criteria. This process continues until the number of pixels in each class changes by less than the selected pixel change threshold or the maximum number of iterations is reached.







2.1.10 Classification

Example

The picture on the left shows a colour composite of interferometric terrain geocoded ERS-1/2 (so-called ERS-Tandem) SAR interferometric images from the area of Morondava (Madagascar). The colours correspond to the interferometric coherence (red channel), mean amplitude (green channel), and amplitude changes (blue channel). On the right side, the obtained land cover classification based on NN method is illustrated.

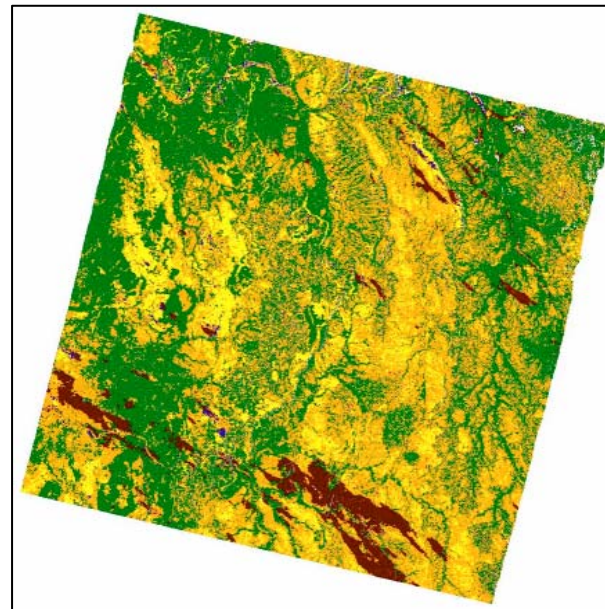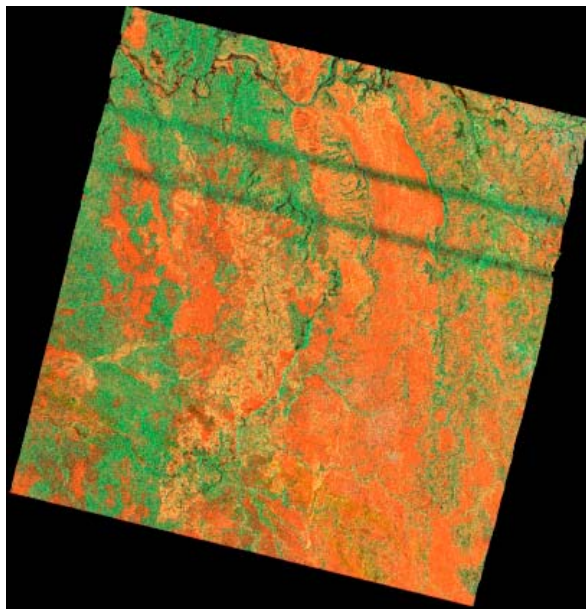

Legend

-  Forest
-  Tree savanna
-  Grass savanna
-  Agriculture
-  Water
-  layover
-  Unclassified





2.1.10 Classification

Multi-Temporal Analysis - Overview

The use of multi-temporal SAR data for the generation of land cover maps - and changes in particular - has increasingly become of interest for two reasons:

- With multi-temporal SAR data the radiometric quality can be improved using an appropriate multi-temporal speckle filter (or segmentation) without degrading the spatial resolution;
- Classes and changes can be identified by analysing the temporal behaviour of the backscattering coefficient and/or interferometric coherence.

In essence, change detection techniques can be distinguished into:

- Changes that can be detected by using deterministic approaches.
- Changes that can be detected by using supervised classifiers (ML, NN, etc.).

Conditio sine qua non for the exploitation of multi-temporal analysis is that SAR data are rigorously geometrically and radiometrically calibrated and normalized, in order to enable a correct comparison.





2.1.10 Classification

Multi-temporal Analysis - Deterministic Approach

The basic idea of a deterministic approach is the analysis of reflectivity changes in the acquired SAR data over time. Measurements of temporal changes in reflectivity relates to transitions in roughness (for instance changes in the surface roughness due to emergence of crop plants) or dielectric changes (for instance drying of the plant, or frost event).

It is worth mentioning that this type of classifier can be used in a pixel-based as well as on an area-based way. Typical applications of the method are in the domain of agriculture, but it can be extended to other applications related to land dynamics mapping (flooding, forestry, etc.).

A simple but efficient way to determine the magnitude of changes in a multi-temporal data set is to perform a ratio between consecutive images.











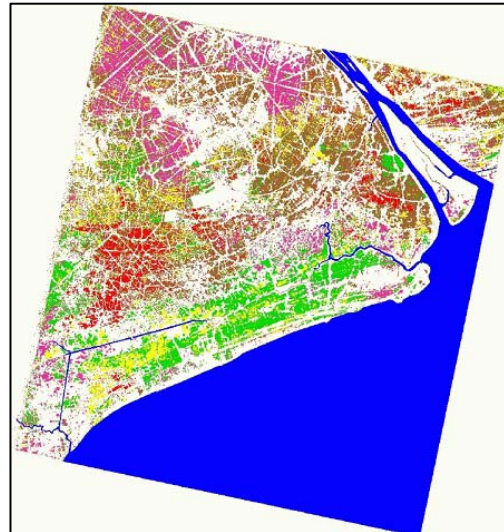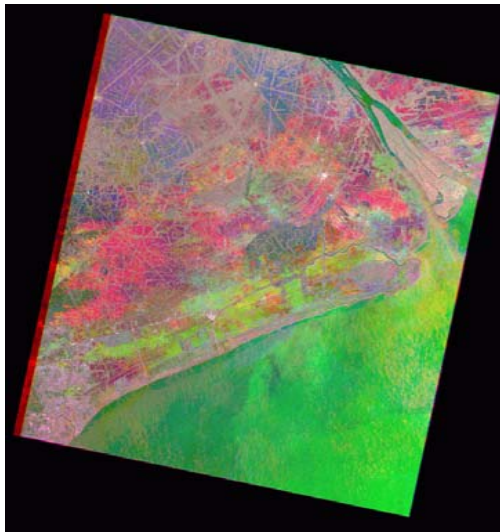

2.1.10 Classification

Example

The picture on the left shows a colour composite of ellipsoidal geocoded ERS-2 SAR multi-temporal images of the Mekong River Delta (Vietnam). The images have been focused, multi-looked, co-registered, speckle filtered using a multi-temporal speckle filtering, geometrically and radiometrically calibrated and normalized. The multitude of colours in the multi-temporal image corresponds to the variety of rice cropping systems practised in this area. Using a deterministic classifier the different planting moments and corresponding crop growth stages have been determined (on the right).




-  Single Crop Rice
-  Double Crop Rice Irrigated
-  Mixed Double Crop Rice
-  Double Crop Rice 1
-  Double Crop Rice 2
-  Urban areas roads and uncultivated





2.1.10 Classification


SARscape® - Basic Module

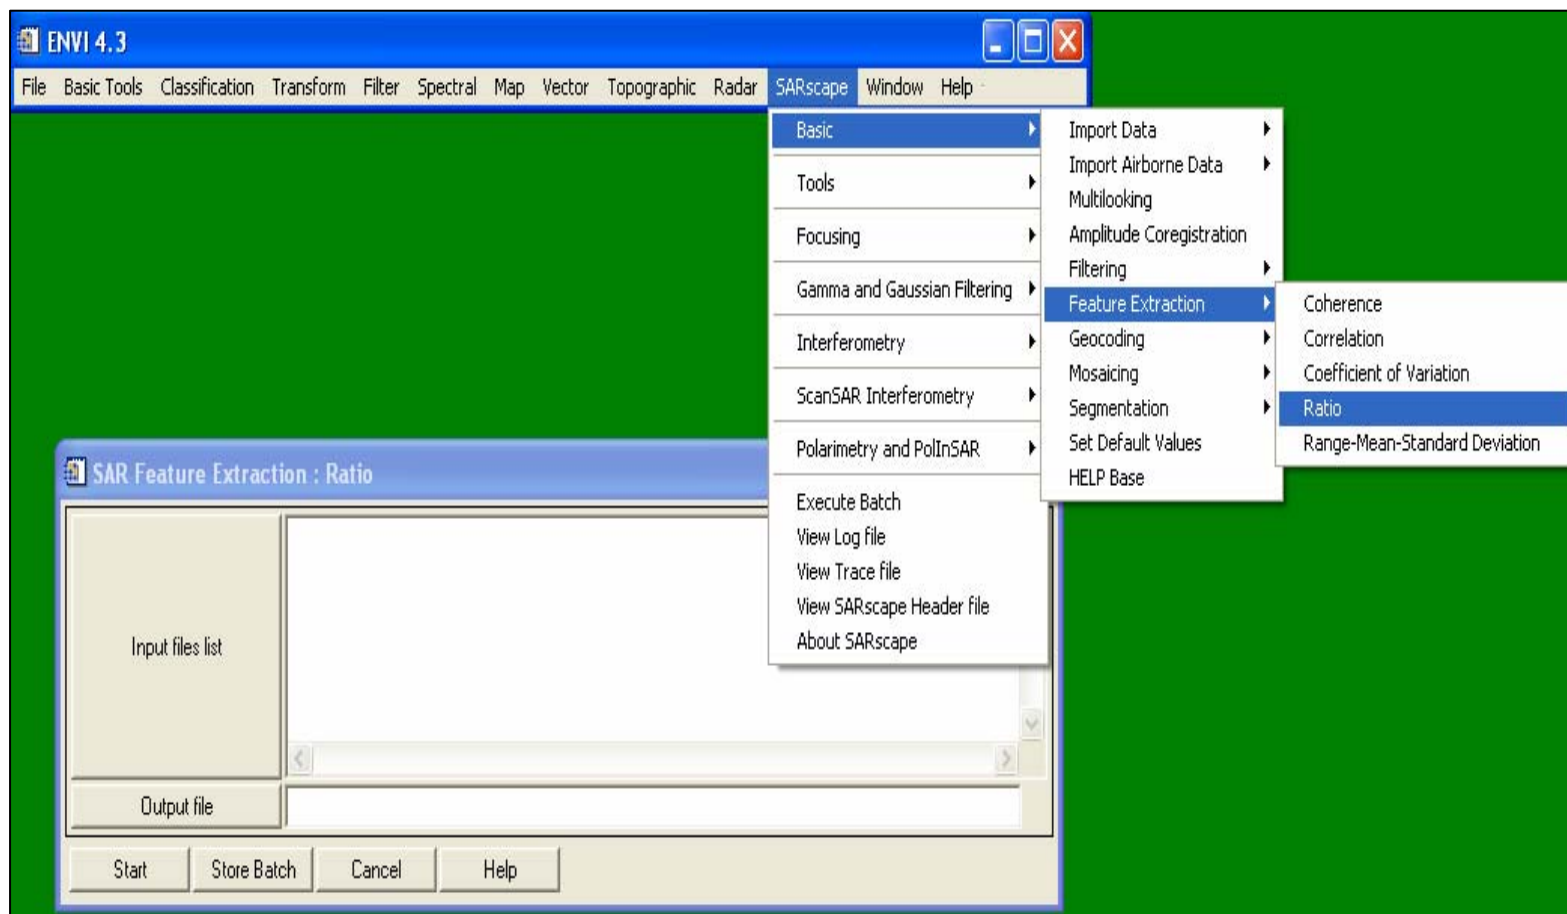



2.1.10 Classification



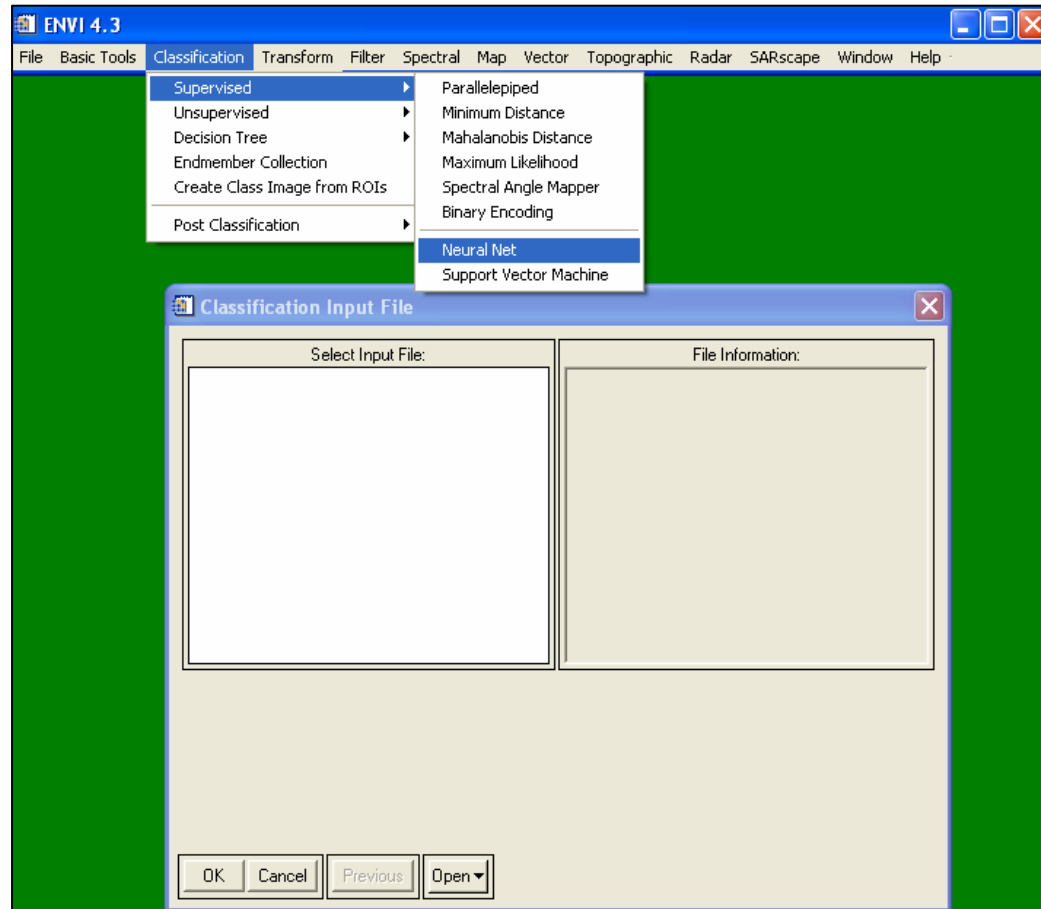




ENVI® Function





2. How SAR Products are Generated?

2.2 Interferometric SAR (InSAR) Processing


-  2.2.1 Interferogram Generation
-  2.2.2 Interferogram Flattening
-  2.2.3 Interferometric Correlation (Coherence)
-  2.2.4 Phase Unwrapping
-  2.2.5 Orbital Correction
-  2.2.6 Phase to Map Conversion
-  2.2.7 Phase to Displacement Conversion



2.2.1 Interferogram Generation

Purpose

The difference r_1 and r_2 (Δr) can be measured by the phase difference (ϕ) between two complex SAR images. This is performed by multiplying one image by (the complex conjugate of) the other one, where an interferogram is formed. The phase of the interferogram contains fringes that trace the topography like contour lines.

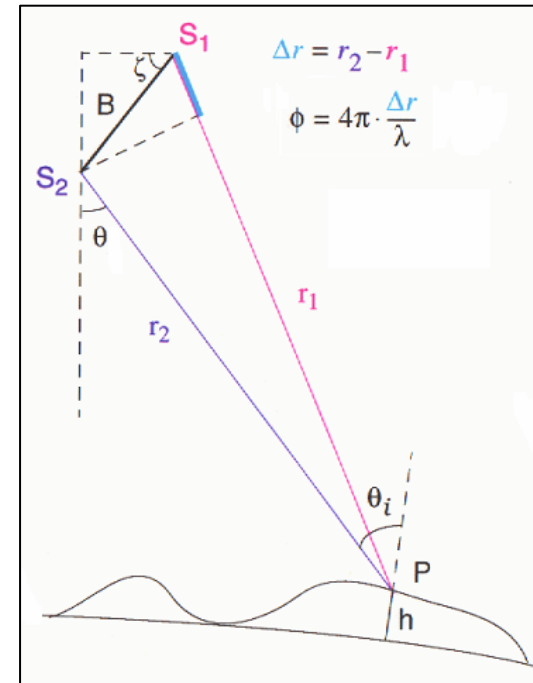




2.2.1 Interferogram Generation

General

After image co-registration an interferometric phase (ϕ) is generated by multiplying one image by the complex conjugate of the second one. A complex interferogram (Int) is formed as schematically shown in the illustration below.

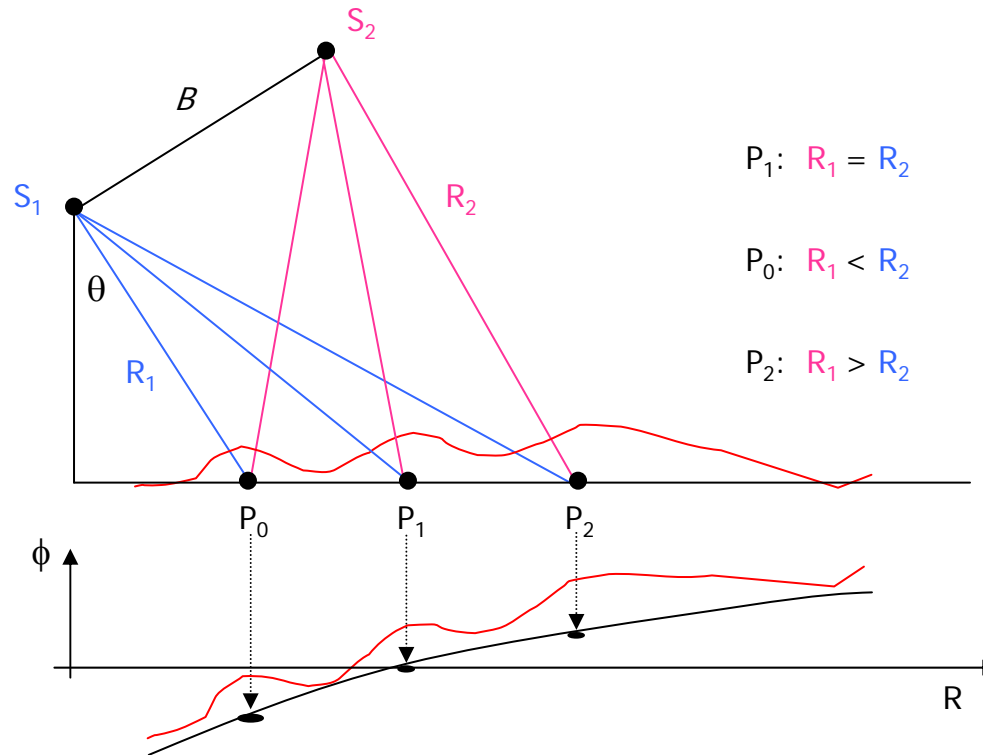

$$Int = S_1 \cdot S_2^*$$

$$\phi = 4\pi (R_1 - R_2) / \lambda$$





2.2.1 Interferogram Generation

Critical Baseline

The generation of an interferogram is only possible when the ground reflectivity acquired with at least two antenna overlap. When the perpendicular component of the baseline (B_n) increases beyond a limit known as the critical baseline, no phase information is preserved, coherence is lost, and interferometry is not possible.

The critical baseline $B_{n,cr}$ can be calculated as

$$B_{n,cr} = \frac{\lambda R \tan(\theta)}{2 R_r}$$

where R_r is the range resolution, and θ is the incidence angle. In case of ERS satellites the critical baseline is approximately 1.1 km.

The critical baseline can be significantly reduced by surface slopes that influence the local incidence angle.






2.2.1 Interferogram Generation

Spectral Shift - Principle

The two antenna locations used for image acquisition induce not only the interferometric phase but also shift the portions of the range (ground reflectivity) spectra that are acquired from each point. The extent of the spectral shift can be approximated by

$$\Delta f = -f_0 \frac{\Delta\theta}{\tan(\theta - \alpha)} = -f_0 \frac{B_n}{R \tan(\theta - \alpha)}$$

where α is the local ground slope, and θ the incidence angle of the master image. This frequency (Δf) shift must be thereby compensated.

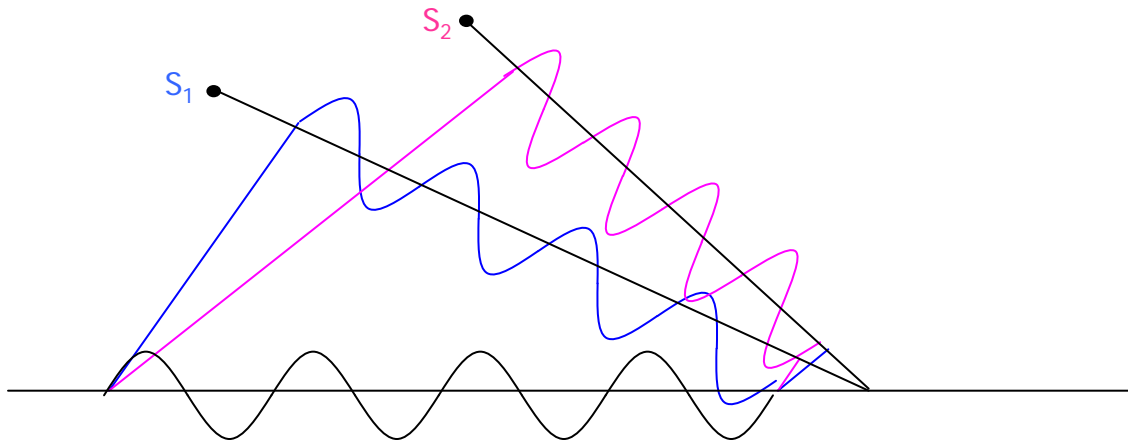




2.2.1 Interferogram Generation

Common Doppler Filtering - Principle

Just as the range spectra become shifted due to variable viewing angles (S_1 and S_2 in the illustration) of the terrain, different Doppler can cause shifted azimuth spectra. As a consequence an azimuth filter applied during the interferogram generation is required to fully capture the scene's potential coherence at the cost of poorer azimuth resolution.

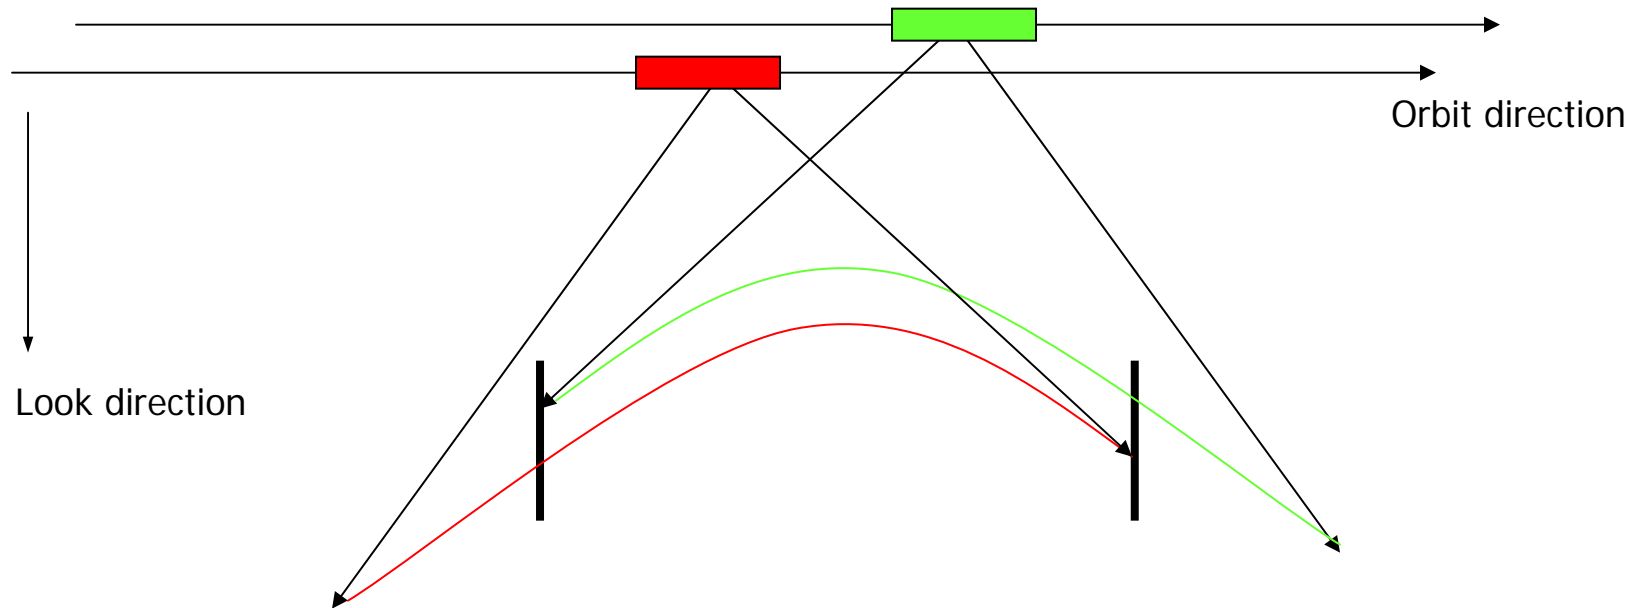




2.2.1 Interferogram Generation

Interferometric Phase

The interferometric phase (ϕ) is expressed as $\phi = \tan(\text{Imaginary}(Int) / \text{Real}(Int))$, modulo 2π .

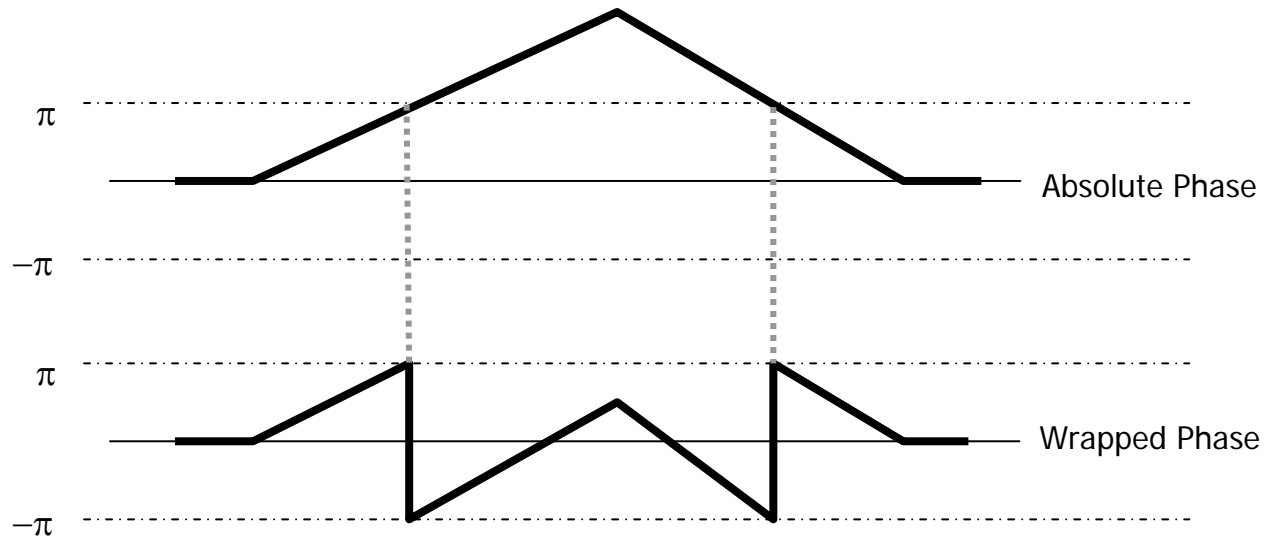

In order to resolve this inherent ambiguity, phase unwrapping must be performed.







2.2.1 Interferogram Generation

Interferogram - Example

The Figure illustrates two ENVISAT ASAR images of the Las Vegas area (USA). Note that the two images have been acquired with a time interval of 70 days. The two scenes, which in InSAR jargon are defined as Master and Slave image, are in the slant range geometry and are used to generate the interferometric phase, corresponding interferogram, and interferometric coherence.

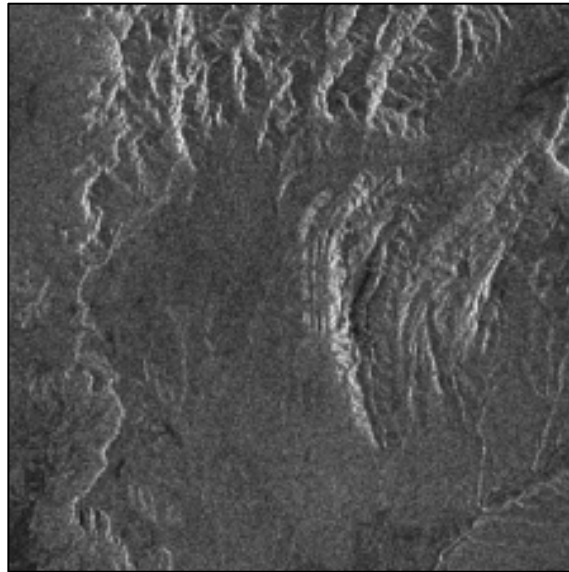

Master image

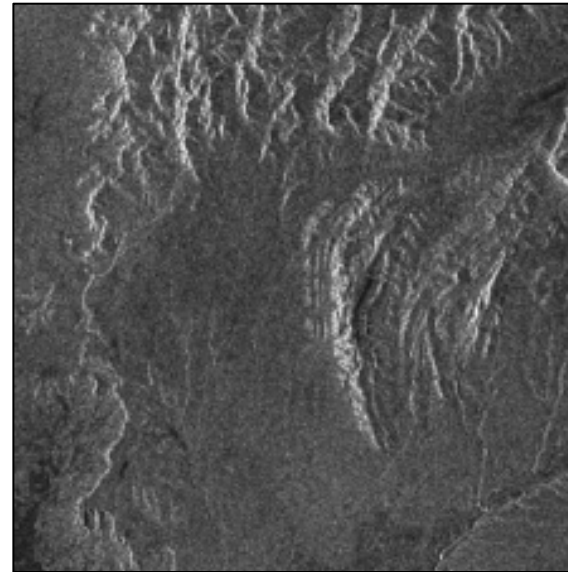


Slave image





2.2.1 Interferogram Generation

Interferogram - Example

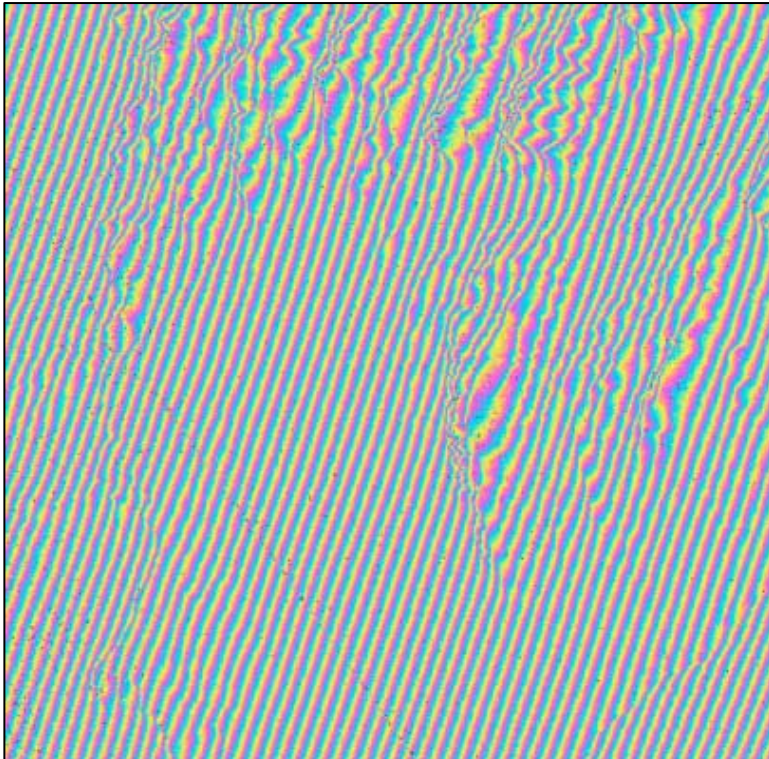


The Figure illustrates the interferogram generated from the two ENVISAT ASAR images (previous page). In essence, the complex interferogram is a pattern of fringes containing all of the information on the relative geometry. The colours (cyan to yellow to magenta) represent the cycles (modulo 2π) of the interferometric phase. Due to the slightly different antenna positions, a systematic phase difference over the whole scene can be observed. In order to facilitate the phase unwrapping, such low frequency phase differences are subsequently removed.





2.2.1 Interferogram Generation


SARscape® - Interferometric Module

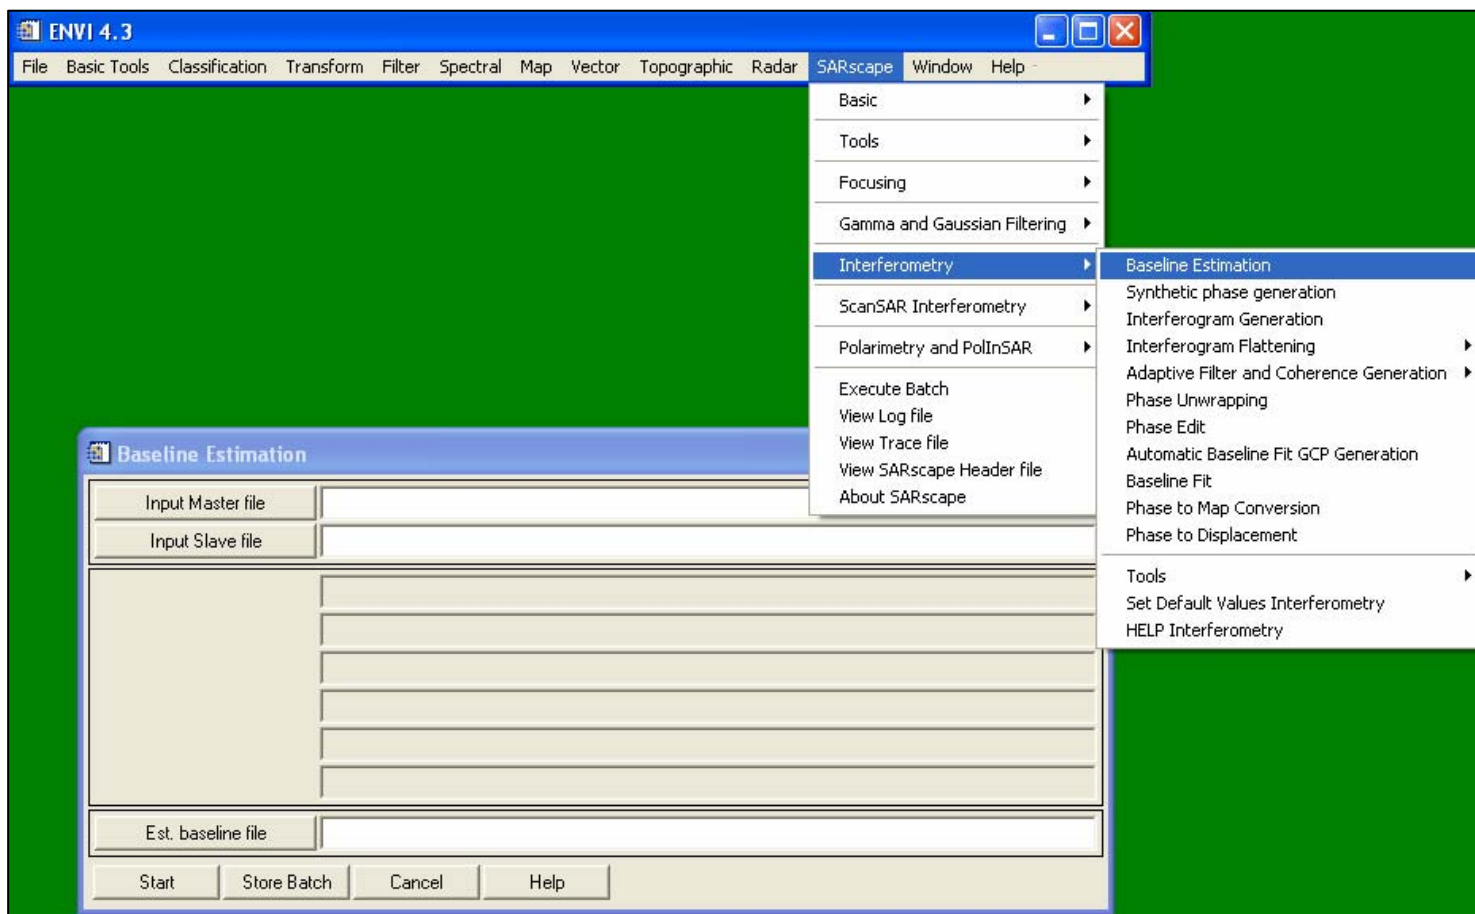



2.2.1 Interferogram Generation

SARscape® - Interferometric Module

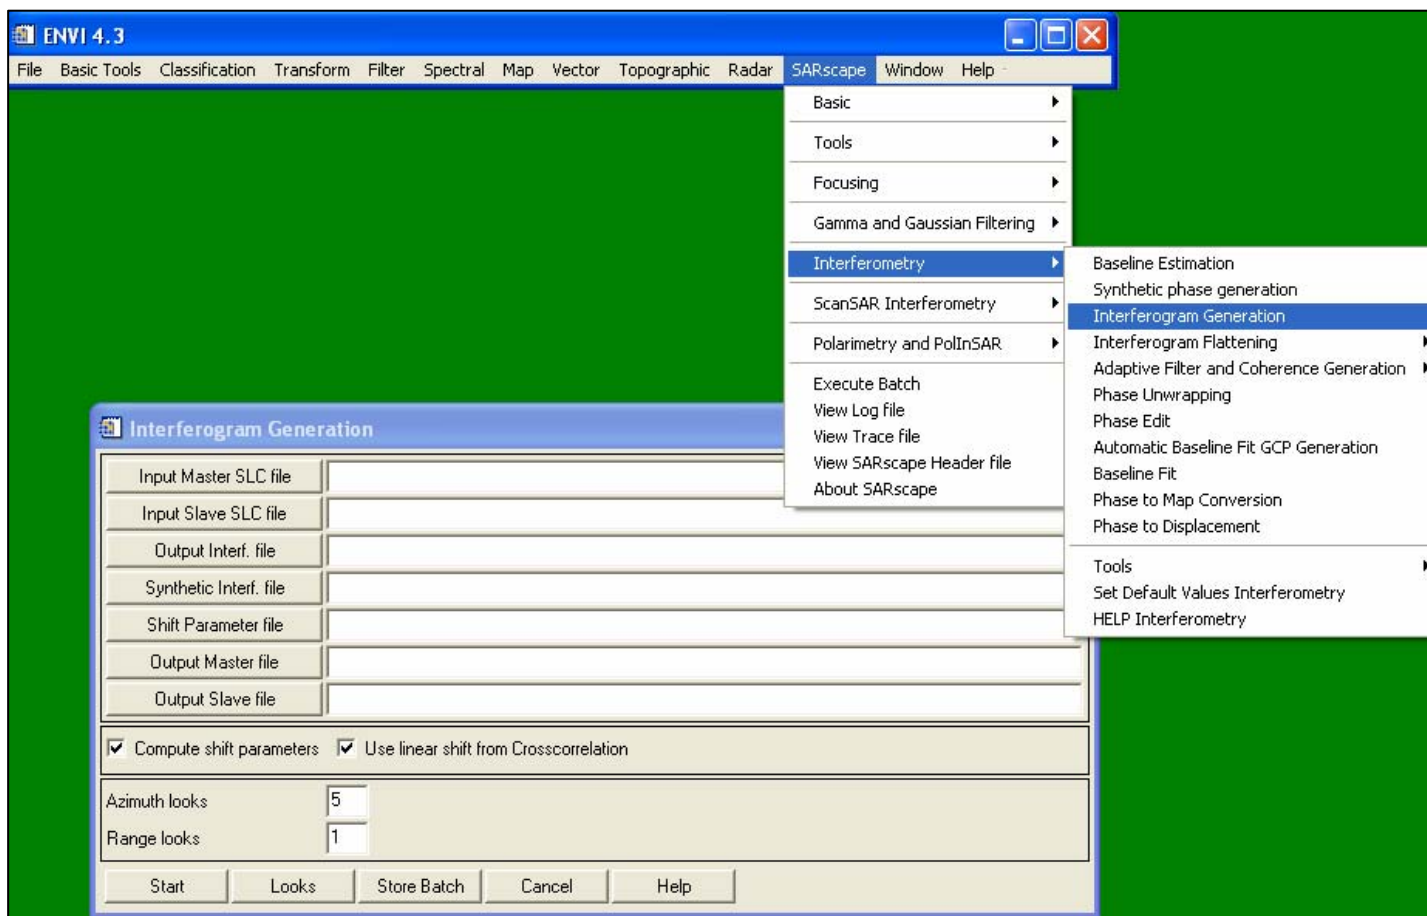

The screenshot shows the ENVI 4.3 interface with the SARscape menu open and the Interferogram Generation dialog box displayed. The dialog box contains the following fields and options:

- Input Master SLC file: [Empty text box]
- Input Slave SLC file: [Empty text box]
- Output Interf. file: [Empty text box]
- Synthetic Interf. file: [Empty text box]
- Shift Parameter file: [Empty text box]
- Output Master file: [Empty text box]
- Output Slave file: [Empty text box]
- Compute shift parameters
- Use linear shift from Crosscorrelation
- Azimuth looks: [5]
- Range looks: [1]

Buttons at the bottom of the dialog: Start, Looks, Store Batch, Cancel, Help.

The SARscape menu is open, showing the following options:

- Basic
- Tools
- Focusing
- Gamma and Gaussian Filtering
- Interferometry** (highlighted)
 - Baseline Estimation
 - Synthetic phase generation
 - Interferogram Generation** (highlighted)
 - Interferogram Flattening
 - Adaptive Filter and Coherence Generation
 - Phase Unwrapping
 - Phase Edit
 - Automatic Baseline Fit GCP Generation
 - Baseline Fit
 - Phase to Map Conversion
 - Phase to Displacement
 - Tools
 - Set Default Values Interferometry
 - HELP Interferometry
- ScanSAR Interferometry
- Polarimetry and PolInSAR
- Execute Batch
- View Log file
- View Trace file
- View SARscape Header file
- About SARscape





2.2.2 Interferogram Flattening

Purpose

In preparation for the phase unwrapping step to come, the expected phase, which is calculated using a system model, is removed, producing a flattened interferogram, that is easier to unwrap.


Neglecting terrain influences and Earth curvature, the frequency to be removed can be estimated by the interferogram itself. However, the most accurate models for removal of the fringes are those that estimate the expected Earth phase by assuming the shape of the Earth is an ellipsoid or, more accurately, by using a Digital Elevation Model.





2.2.2 Interferogram Flattening

Interferogram Flattening with Ellipsoid - An Example

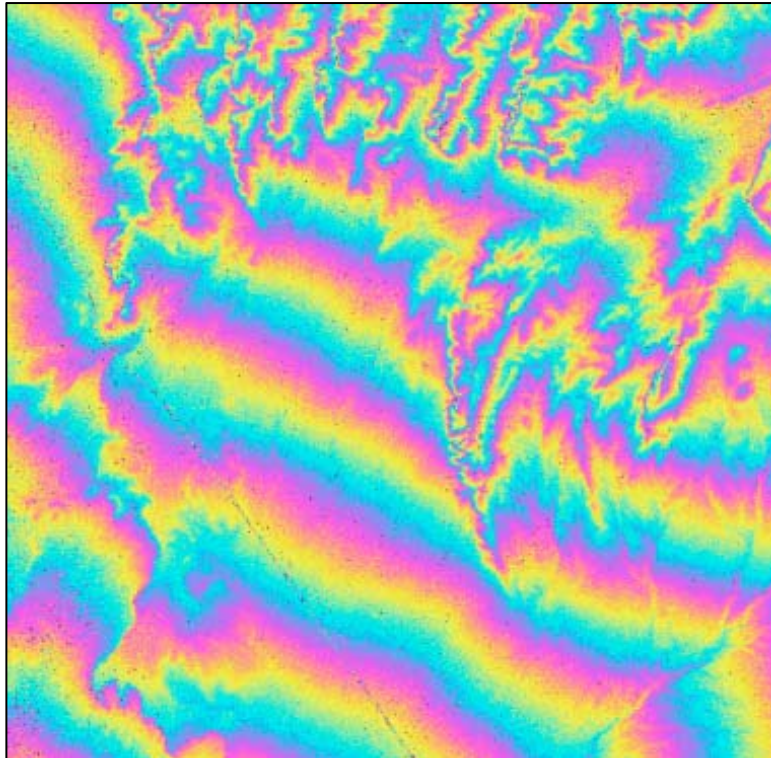


The Figure illustrates the interferogram flattened assuming the Earth's surface an ellipsoid. If compared to the initial interferogram, it is evident that the number of fringes has been strongly reduced, hence making it possible to facilitate the phase unwrapping process and the generation of the Digital Elevation Model or, in case of differential interferometry, the measurements of ground motions.





2.2.2 Interferogram Flattening

Interferogram Flattening with Digital Elevation Model - An Example

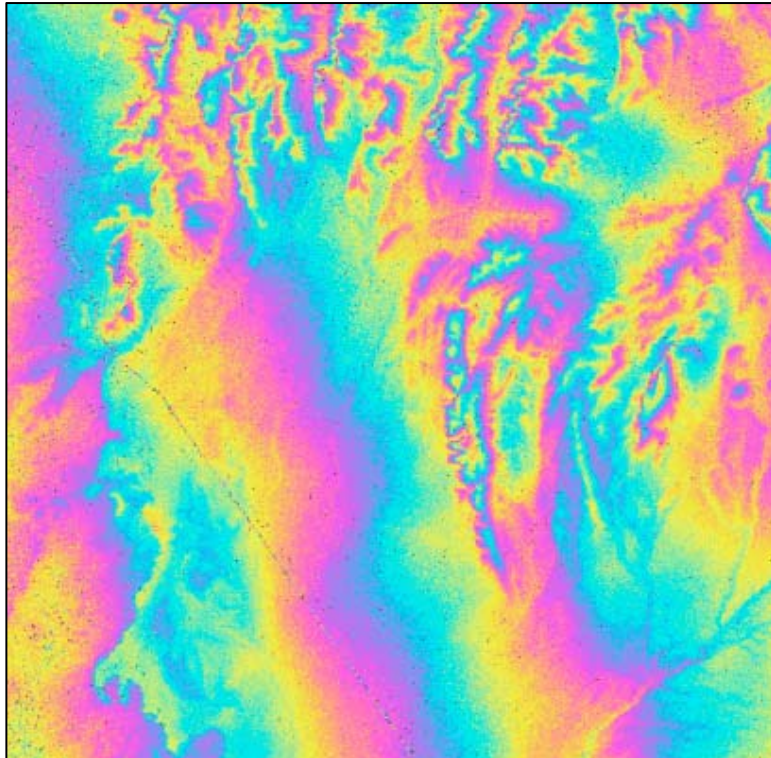


The Figure illustrates the interferogram flattened by considering a low resolution Digital Elevation Model, i.e. the topography. If this is compared to the initial interferogram, or to the ellipsoidal flattened one, it is evident that the number of fringes has been strongly reduced, hence facilitating the phase unwrapping process and the generation of the Digital Elevation Model or, in case of differential interferometry, the measurements of ground motions.



2.2.2 Interferogram Flattening


SARscape® - Interferometric Module

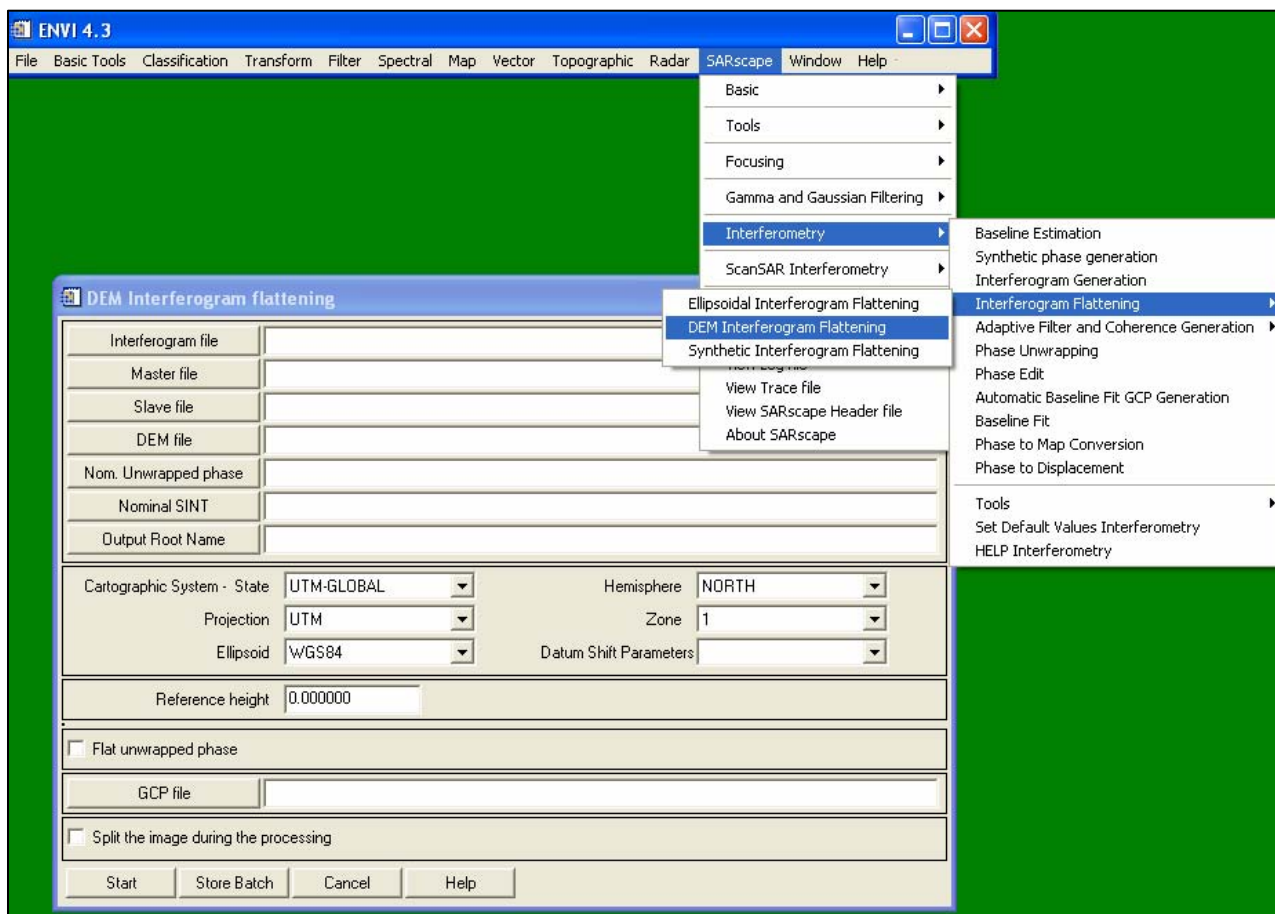



2.2.2 Interferogram Flattening

SARscape® - Interferometric Module

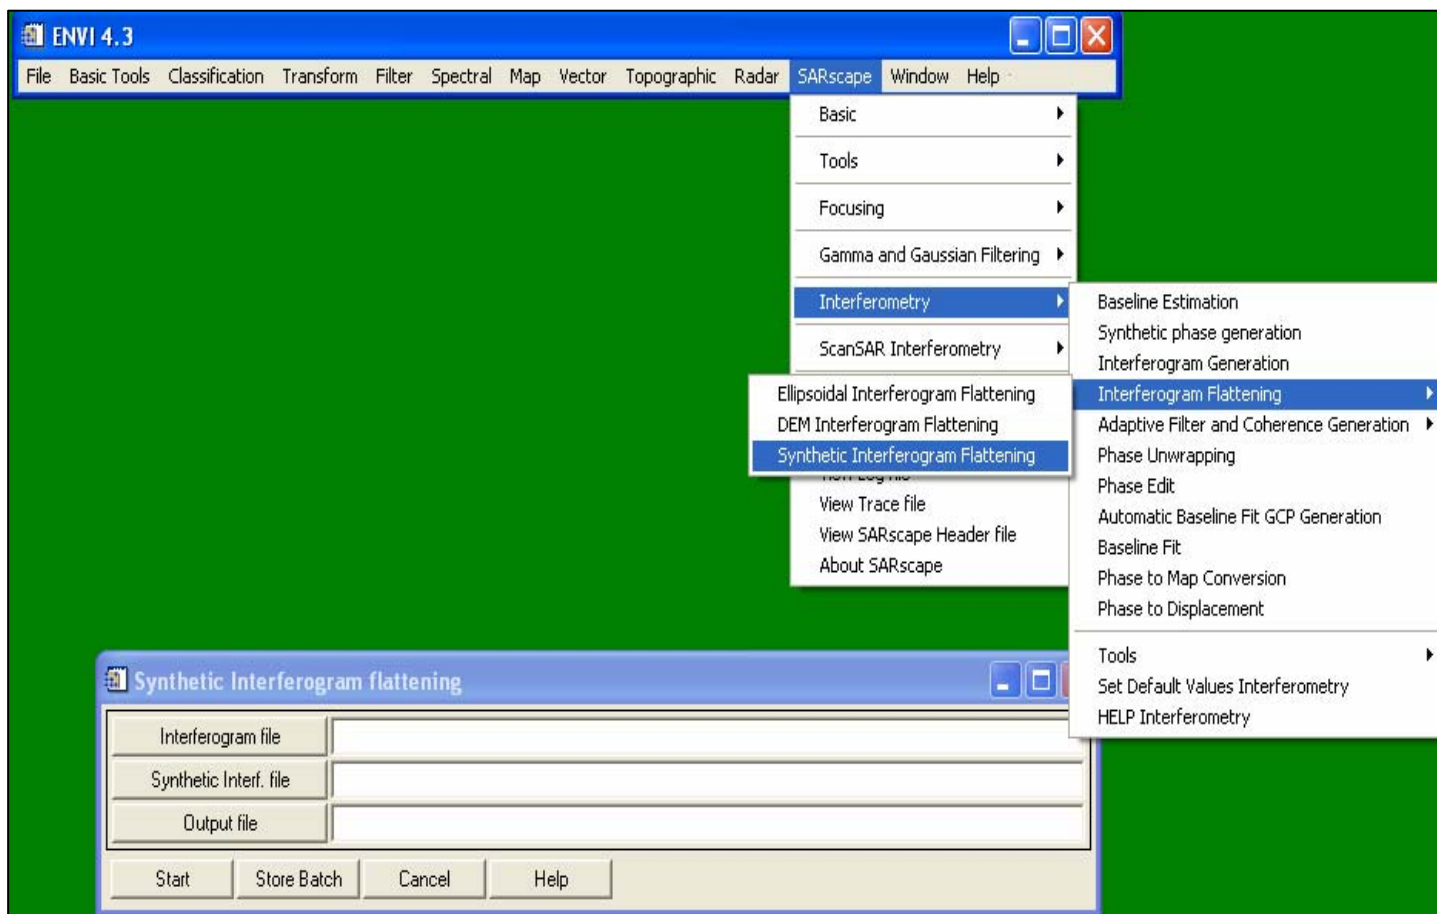



2.2.3 Interferometric Correlation (Coherence)

Purpose

Given two co-registered complex SAR images (S_1 and S_2), one calculates the interferometric coherence (γ) as a ratio between coherent and incoherent summations:

$$\gamma = \frac{\left| \sum s_1(x) \cdot s_2(x)^* \right|}{\sqrt{\sum |s_1(x)|^2 \cdot \sum |s_2(x)|^2}}$$

Note that the observed coherence - which ranges between 0 and 1 - is, in primis, a function of systemic spatial decorrelation, the additive noise, and the scene decorrelation that takes place between the two acquisitions.

In essence coherence has, in primis, a twofold purpose:

- To determine the quality of the measurement (i.e. interferometric phase). Usually, phases having coherence values lower than 0.2 should not be considered for the further processing.
- To extract thematic information about the object on the ground in combination with the backscattering coefficient (σ^0).





2.2.3 Interferometric Correlation (Coherence)

Coherence - An Example



The Figure illustrates the estimated coherence. Bright values correspond to values approaching to 1, while dark values (black = 0) are those areas where changes (or no radar return, radar facing slope, etc.) occurred during the time interval, 70 days in this case. Note that coherence is sensitive to microscopic object properties and to short-term scatter changes. In most cases, the thematic information content decreases with increasing acquisition interval, mainly due to phenological or man-made changes of the object or weather conditions. Since the selected sites are located in dry areas, high coherence information is observed even over long timescales.



2.2.3 Interferometric Correlation (Coherence)

Filtered (DEM Flattened) Interferogram - An Example




The Figure illustrates the filtered interferogram after an adaptive filtering. Compare this picture with the unfiltered one (Interferogram Flattening with Digital Elevation Model). The basic idea of this adaptive filtering is to use the coherence values in order to obtain irregular windows and thus specifically filter the different features.



2.2.3 Interferometric Correlation (Coherence)

SARscape® - Interferometric Module

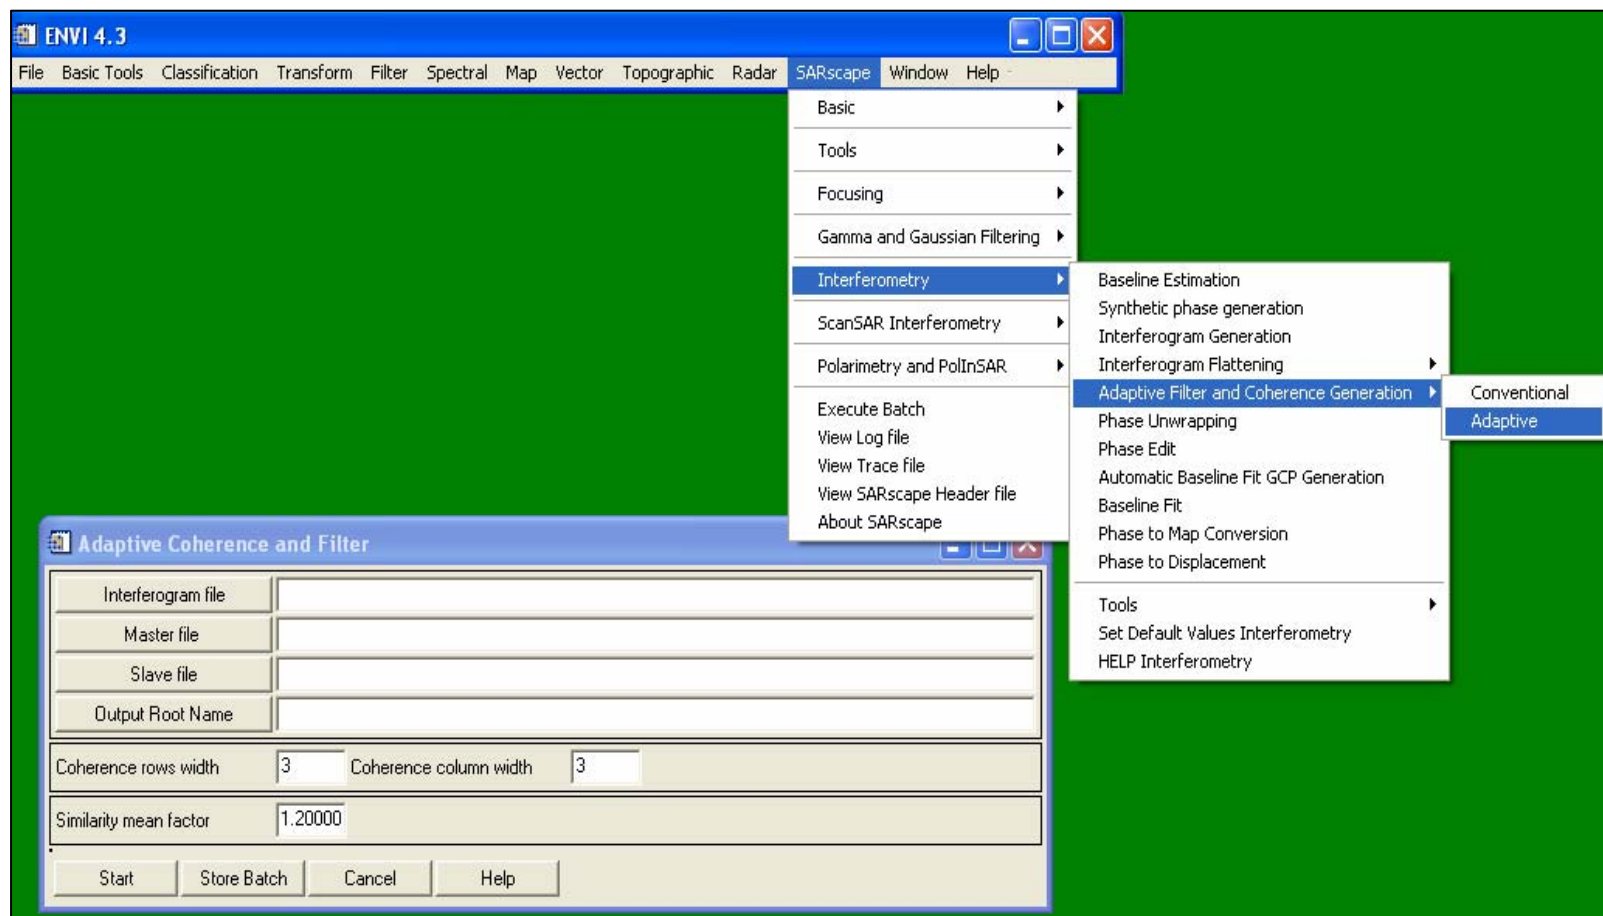

The screenshot shows the ENVI 4.3 interface with the SARscape menu open. The 'Adaptive Filter and Coherence Generation' option is selected, and its sub-menu is visible. The 'Adaptive Coherence and Filter' dialog box is also open, showing input fields for file names and coherence parameters.

ENVI 4.3 SARscape Menu:

- Basic
- Tools
- Focusing
- Gamma and Gaussian Filtering
- Interferometry**
 - Baseline Estimation
 - Synthetic phase generation
 - Interferogram Generation
 - Interferogram Flattening
 - Adaptive Filter and Coherence Generation**
 - Conventional
 - Adaptive**
 - Phase Unwrapping
 - Phase Edit
 - Automatic Baseline Fit GCP Generation
 - Baseline Fit
 - Phase to Map Conversion
 - Phase to Displacement
- ScanSAR Interferometry
- Polarimetry and PolInSAR
- Execute Batch
- View Log file
- View Trace file
- View SARscape Header file
- About SARscape

Adaptive Coherence and Filter Dialog Box:

| | |
|------------------------|---------|
| Interferogram file | |
| Master file | |
| Slave file | |
| Output Root Name | |
| Coherence rows width | 3 |
| Coherence column width | 3 |
| Similarity mean factor | 1.20000 |

Buttons: Start, Store Batch, Cancel, Help





2.2.4 Phase Unwrapping

Purpose


The phase of the interferogram can only be modulo 2π . Phase Unwrapping is the process that resolves this 2π ambiguity. Several algorithms (such as the branch-cuts, region growing, minimum cost flow, minimum least squares, multi-baseline, etc.) have been developed. In essence, none of these are perfect, and depending on the applied technique some phase editing should be carried out in order to correct the wrong unwrapped phases. The most reliable techniques are those in which different algorithms are combined.





2.2.4 Phase Unwrapping

Unwrapped Phase - An Example

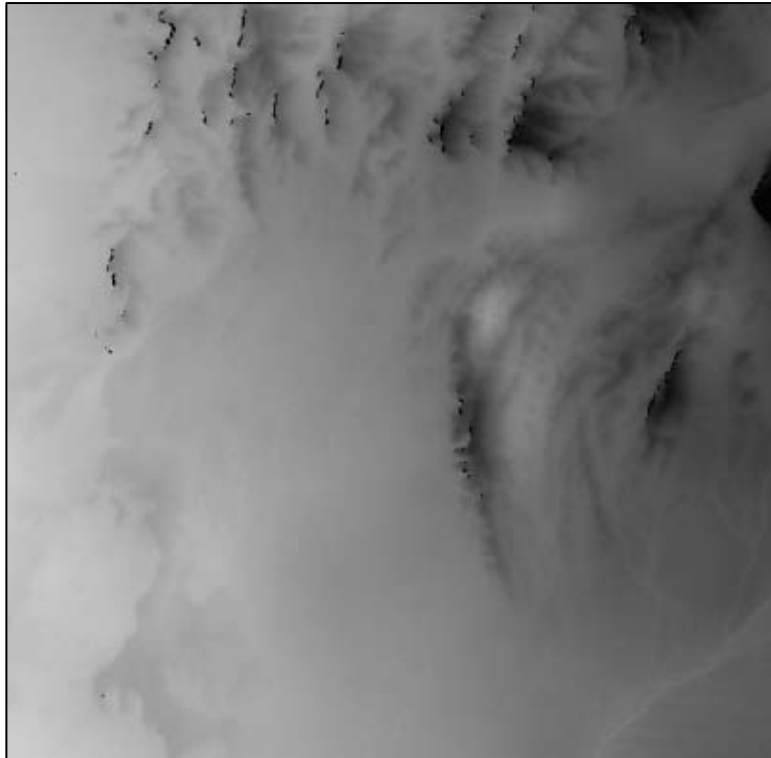


The Figure illustrates the unwrapped phase. At this stage the grey levels representing the phase information are relative and must be absolutely calibrated in order to convert it to terrain height. Note that no grey level discontinuities can be observed. This indicates that the phase unwrapping process has been correctly performed.





2.2.4 Phase Unwrapping

SARscape® - Interferometric Module

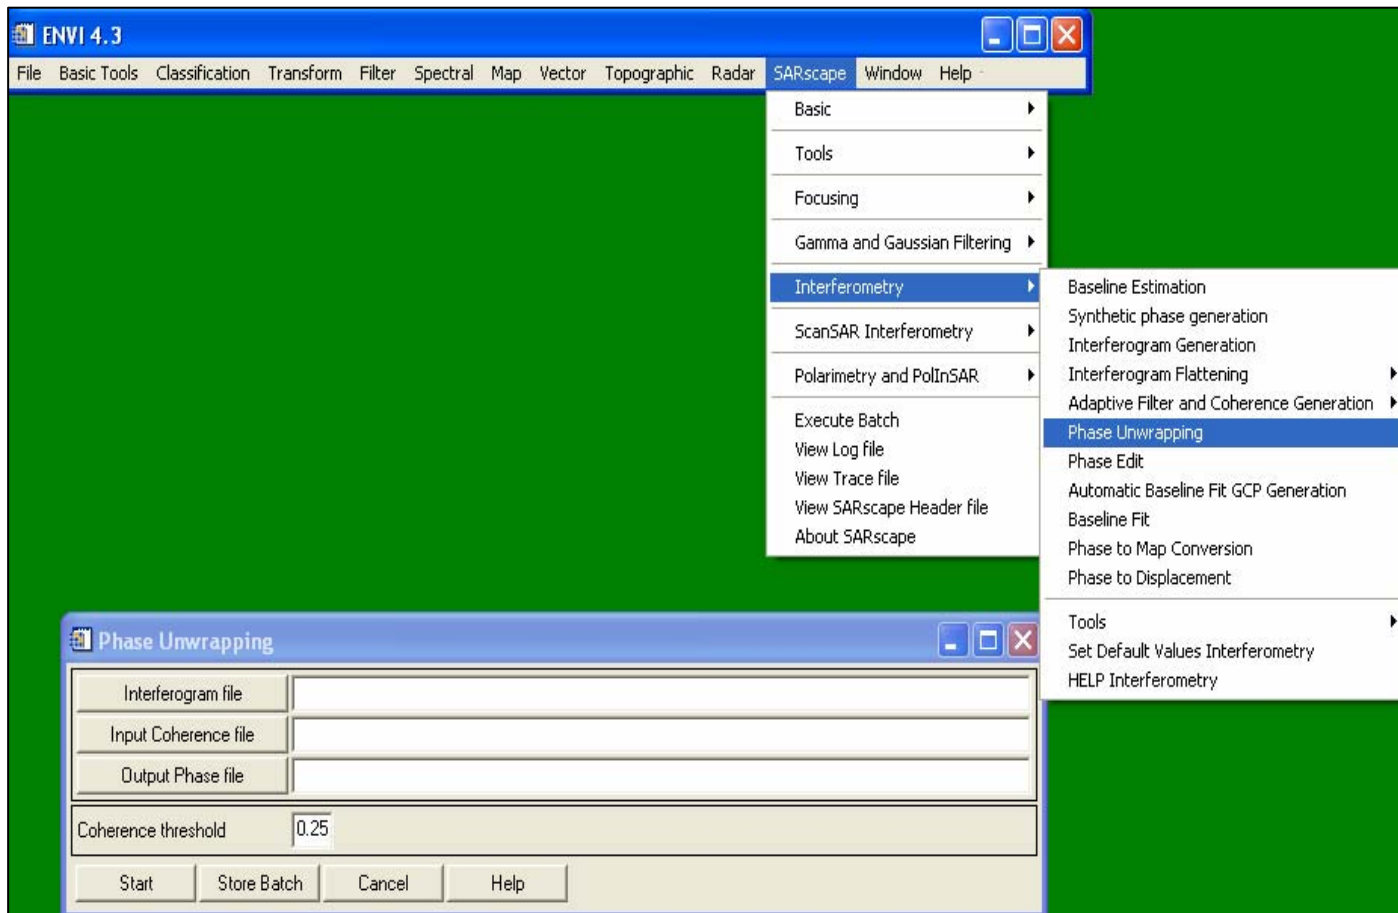

The screenshot shows the ENVI 4.3 interface with the SARscape menu open. The 'Interferometry' option is selected, showing a sub-menu with the following items: Baseline Estimation, Synthetic phase generation, Interferogram Generation, Interferogram Flattening, Adaptive Filter and Coherence Generation, Phase Unwrapping (highlighted), Phase Edit, Automatic Baseline Fit: GCP Generation, Baseline Fit, Phase to Map Conversion, and Phase to Displacement. Below the menu, the 'Phase Unwrapping' dialog box is open, featuring three file input fields: 'Interferogram file', 'Input Coherence file', and 'Output Phase file'. A 'Coherence threshold' field is set to 0.25. At the bottom of the dialog are buttons for 'Start', 'Store Batch', 'Cancel', and 'Help'.





2.2.5 Orbital Correction

Purpose

The orbital correction is crucial for a correct transformation of the phase information into height values. In essence, this procedure, which requires the use of some accurate Ground Control Points, makes it possible to

i) calculate the phase offset (hence allowing to calculate the absolute phase), and
ii) refine the orbits and thus obtain a more accurate estimate of the orbits and the corresponding baseline. Generally, this step is performed by taking into account


- Shift in azimuth direction
- Shift in range direction
- Convergence of the orbits in azimuth direction
- Convergence of the orbits in range direction
- Absolute phase





2.2.5 Orbital Correction

Filtered (DEM Flattened) Interferogram after Orbital Correction - Example

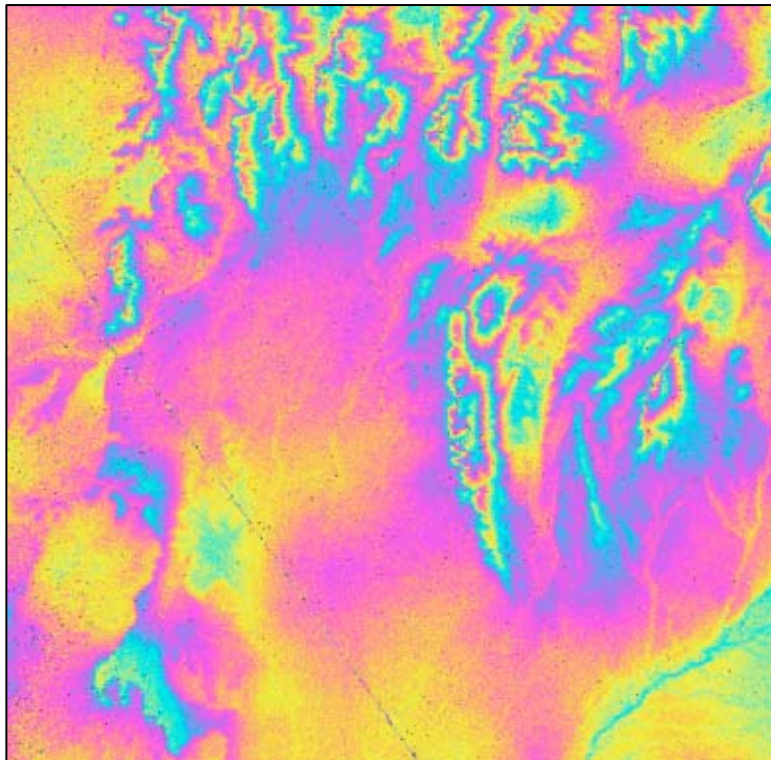

The Figure illustrates the filtered DEM flattened interferogram after the orbital correction. Compare it with the non corrected one. From a visual comparison it is clear how fringes that have been induced by inaccurate orbits may be removed in order to obtain a proper interferogram.



2.2.5 Orbital Correction

SARscape® - Interferometric Module

The screenshot shows the ENVI 4.3 interface with the SARscape menu open. The 'Interferometry' option is selected, showing a sub-menu with the following items:

- Baseline Estimation
- Synthetic phase generation
- Interferogram Generation
- Interferogram Flattening
- Adaptive Filter and Coherence Generation
- Phase Unwrapping
- Phase Edit
- Automatic Baseline Fit GCP Generation
- Baseline Fit** (highlighted)
- Phase to Map Conversion
- Phase to Displacement

The 'Baseline fit' dialog box is open, containing the following fields and options:

- Master file: [Empty text box]
- Slave file: [Empty text box]
- Synthetic phase: [Empty text box]
- Phase file: [Empty text box]
- SR DEM file: [Empty text box]
- Cartographic System - State: UTM-GLOBAL
- Hemisphere: NORTH
- Projection: UTM
- Zone: 1
- Ellipsoid: WGS84
- Datum Shift Parameters: [Empty text box]
- Reference height: 0.0
- GCP file: [Empty text box]

Buttons at the bottom of the dialog: Start, Store Batch, Cancel, Help.





2.2.6 Phase to Map Conversion

Purpose

The absolute calibrated and unwrapped phase values are converted to height and directly geocoded into a map projection. This step is performed in a similar way as in the geocoding procedure, by considering the Range-Doppler approach and the related geodetic and cartographic transforms. The fundamental difference with the geocoding step is that the Range-Doppler equations are applied simultaneously to the two antenna, making it possible to obtain not only the height of each pixel, but also its location (x,y,h) in a given cartographic and geodetic reference system. Formally, the system is:


$$\begin{cases} \left| \vec{P} - \vec{S}_1 \right| - \left| \vec{R}_1 \right| = 0 \\ \frac{2}{\lambda} \cdot \frac{\left(\vec{P} - \vec{S}_1 \right) \cdot \left(\vec{V}_P - \vec{V}_{S_1} \right)}{\left| \vec{P} - \vec{S}_1 \right|} + f_D = 0 \\ \left| \vec{P} - \vec{S}_2 \right| - \left| \vec{R}_2 \right| = 0 \\ \frac{2}{\lambda} \cdot \frac{\left(\vec{P} - \vec{S}_2 \right) \cdot \left(\vec{V}_P - \vec{V}_{S_2} \right)}{\left| \vec{P} - \vec{S}_2 \right|} + f_D = 0 \\ \left| \vec{R}_1 \right| - \left| \vec{R}_2 \right| = \frac{\lambda}{4\pi} \cdot \phi \end{cases}$$





2.2.6 Phase to Map Conversion

Digital Elevation Model, Las Vegas (USA) - Example

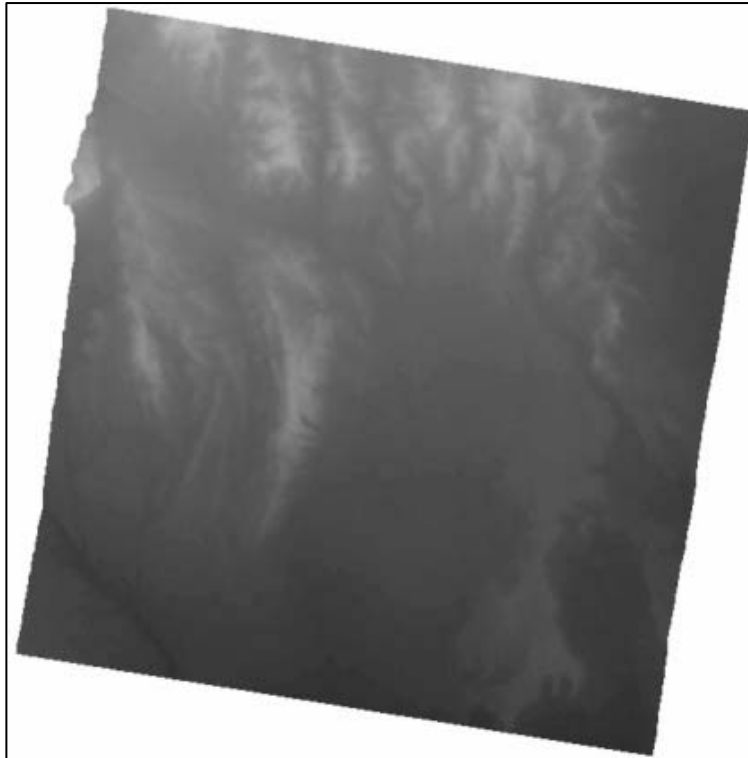

The Figure illustrates the derived Digital Elevation Model (DEM) in the UTM coordinate system. Dark values correspond to the low height values, while bright areas correspond to higher elevations.


The height accuracy of the obtained DEM, which has a spatial resolution of 20m, is of +/- 5 meter.



2.2.6 Phase to Map Conversion

3D DEM View, Las Vegas (USA) - Example


The Figure illustrates the Digital Elevation Model in a 3D view: The colours of the image are provided by the combination of interferometric coherence and backscattering coefficient data.

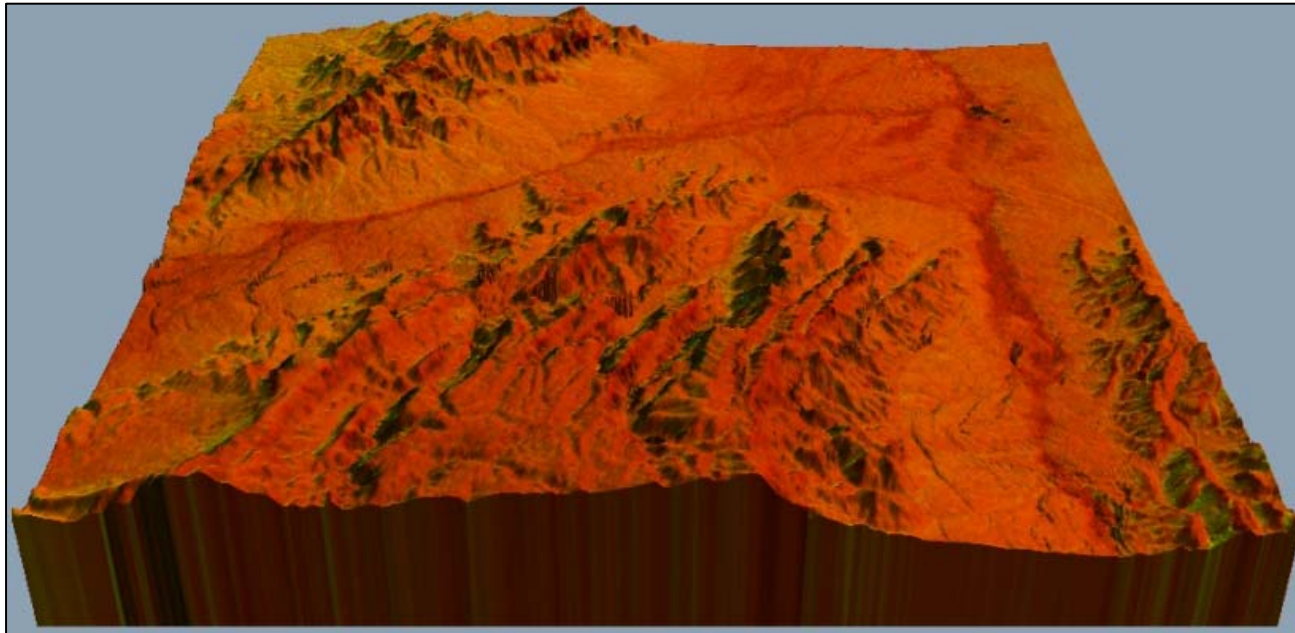



2.2.6 Phase to Map Conversion

SARscape® - Interferometric Module

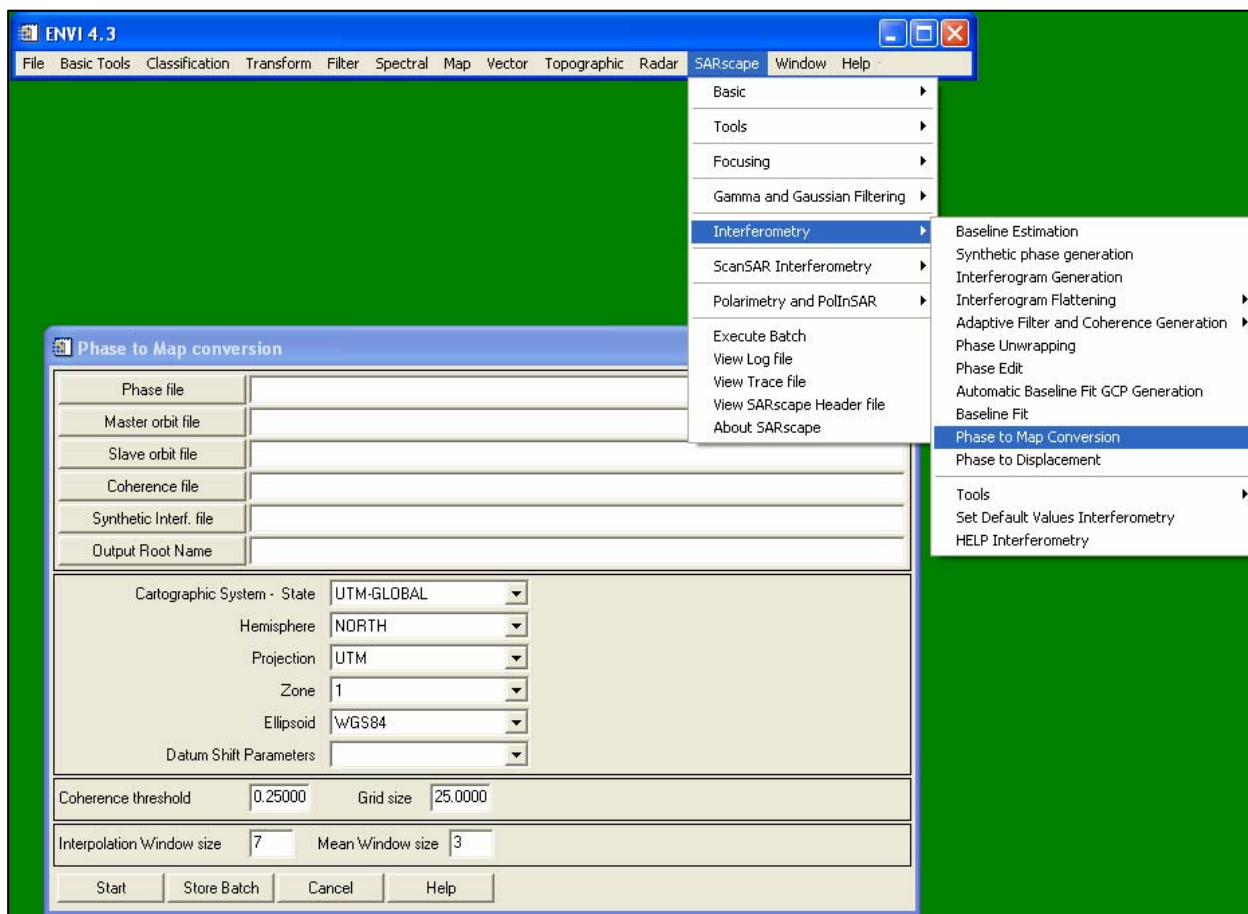

The screenshot shows the ENVI 4.3 interface with the SARscape menu open. The 'Interferometry' sub-menu is expanded, showing options like 'Baseline Estimation', 'Synthetic phase generation', and 'Phase to Map Conversion'. The 'Phase to Map conversion' dialog box is open, displaying input fields for file names and cartographic parameters.

| Phase to Map conversion | |
|---|----------------------|
| Phase file | <input type="text"/> |
| Master orbit file | <input type="text"/> |
| Slave orbit file | <input type="text"/> |
| Coherence file | <input type="text"/> |
| Synthetic Interf. file | <input type="text"/> |
| Output Root Name | <input type="text"/> |
| Cartographic System - State | UTM-GLOBAL |
| Hemisphere | NORTH |
| Projection | UTM |
| Zone | 1 |
| Ellipsoid | WGS84 |
| Datum Shift Parameters | <input type="text"/> |
| Coherence threshold | 0.25000 |
| Grid size | 25.0000 |
| Interpolation Window size | 7 |
| Mean Window size | 3 |
| <input type="button" value="Start"/> <input type="button" value="Store Batch"/> <input type="button" value="Cancel"/> <input type="button" value="Help"/> | |





2.2.7 Phase to Displacement Conversion

Purpose

The temporal separation in repeat-pass interferometry of days, months, or even years, can be used to advantage for long term monitoring of geodynamic phenomena, in which the target changes position at a relatively slow pace, as in the case of glacial or lava-flow movements. However, it is also useful for analysing the results of single events, such as earthquakes.

In essence, the observed phase (ϕ_{int}) is the sum of several contributions. The objective of Differential interferometry (DInSAR) is to extract from the different components, the displacement one ($\phi_{Movement}$).

$$\phi_{Int} = 4\pi \frac{R_1 - R_2}{\lambda} = \phi_{Topography} + \phi_{Change} + \phi_{Movement} + \phi_{Atmosphere} + \phi_{Noise}$$






2.2.7 Phase to Displacement Conversion

Principle


Differential interferogram can be generated in different ways, as shown below. In the first case, passes 1 (pre event) and 2 (after event) in combination with a DEM (used for subtracting the topography induced fringes) are considered. In the second case, in order to avoid the DEM generation and isolate movements associated with the event, passes 1 and 2 combined with passes 1 and 3 are taken into account.

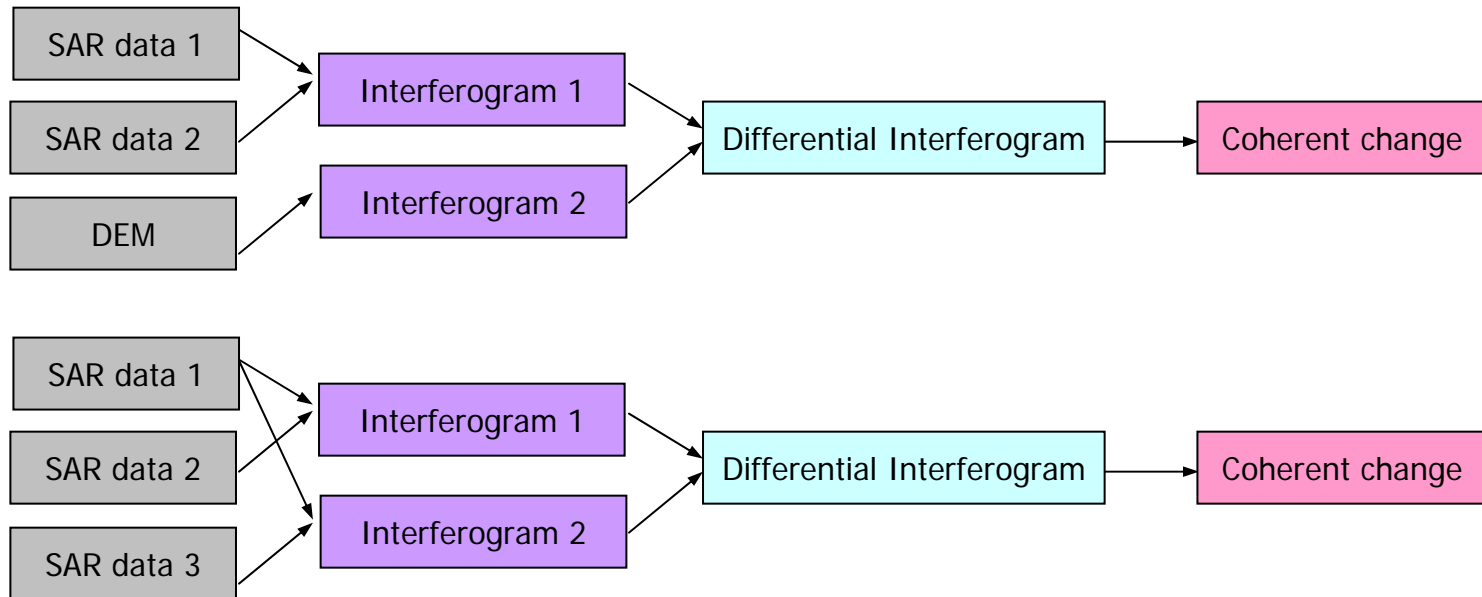



2.2.7 Phase to Displacement Conversion

Differential Interferogram, Earthquake Bam (Iran) - Example

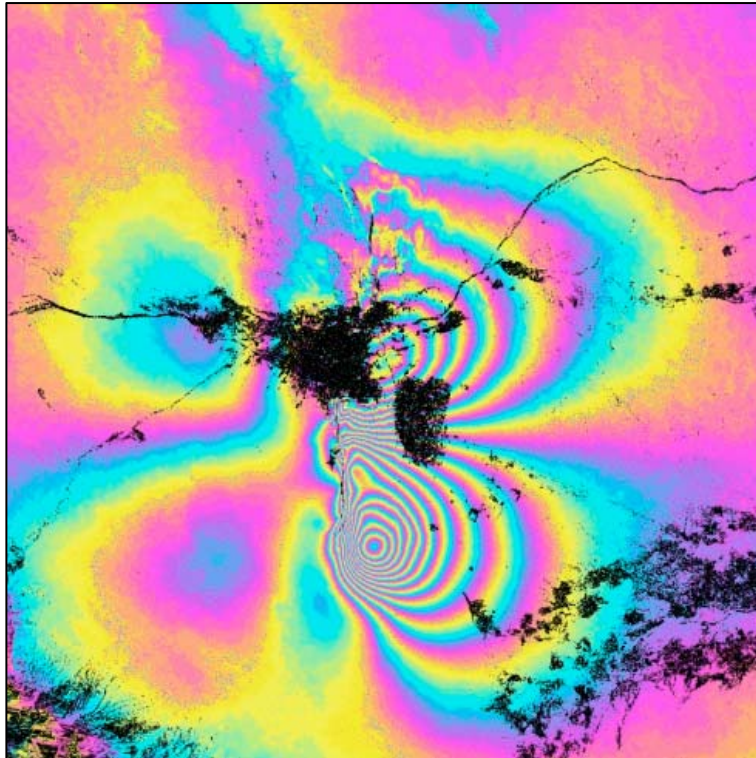


The Figure shows a differential interferogram generated from the ENVISAT ASAR pair acquired on 3. December 2003 (pre-earthquake) and 11. February 2004 (post-earthquake). An InSAR DEM (generated from an ERS-Tandem pair) was used for subtracting the topography induced fringes.





2.2.7 Phase to Displacement Conversion

Interferometric Coherence , Earthquake Bam (Iran) - Example

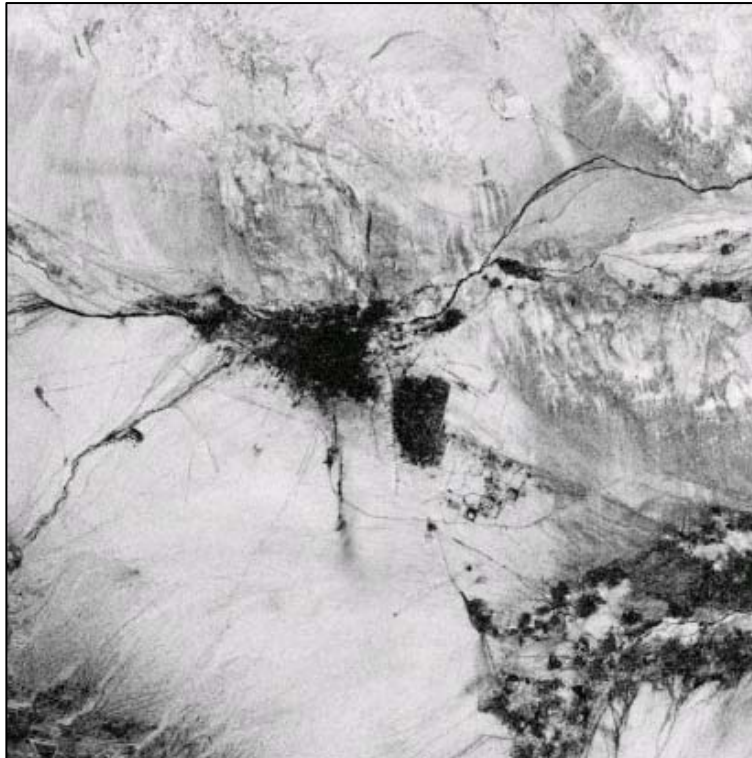


The Figure illustrates the interferometric coherence relevant to the 3. December 2003 / 11. February 2004 ENVISAT ASAR pair. It is important to note that lowest coherence values (darkest values) correspond both to steep slopes or vegetated areas (especially visible in the lower part of the image) and to the Bam built zone (image centre), which was completely destroyed by the earthquake.



2.2.7 Phase to Displacement Conversion

Deformation Map, Earthquake Bam (Iran) - Example

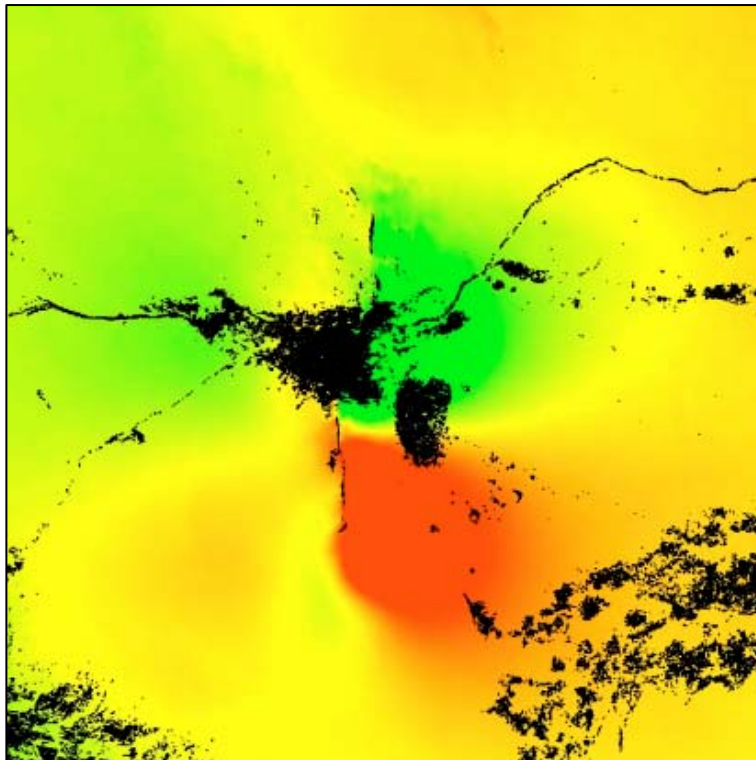

The Figure illustrates the deformation map obtained considering a strike slip fault (horizontal movement) with a North -South oriented fault plane. Red and green tones represent the areas of largest deformation (in opposite direction), while yellowish areas correspond to smaller deformation zones.





2.2.7 Phase to Displacement Conversion

SARscape® - Interferometric Module

ENVI 4.3 SARscape

File Basic Tools Classification Transform Filter Spectral Map Vector Topographic Radar SARscape Window Help

Basic
Tools
Focusing
Gamma and Gaussian Filtering
Interferometry
ScanSAR Interferometry
Polarimetry and PolInSAR
Execute Batch
View Log file
View Trace file
View SARscape Header file
About SARscape

Baseline Estimation
Synthetic phase generation
Interferogram Generation
Interferogram Flattening
Adaptive Filter and Coherence Generation
Phase Unwrapping
Phase Edit
Automatic Baseline Fit GCP Generation
Baseline Fit
Phase to Map Conversion
Phase to Displacement
Tools
Set Default Values Interferometry
HELP Interferometry

Phase to Displacement

Input file
Output file
DEM file
GCP file
Deformation field

Gcp plane correction

Output grid size: 25.0000
Cartographic System - State: UTM-GLOBAL
Hemisphere: NORTH
Projection: UTM
Zone: 1
Ellipsoid: WGS84
Datum Shift Parameters:
Reference height: 0.0

Deformation vector direction

Slope displacement
 Vertical displacement
 Displacement user defined direction

Azimuth: 0.000000
Inclination: 0.000000

RESAMPLING

Nearest Neighbour Bilinear 3rd Cubic Convolution 4th Cubic Convolution

Start Store Batch Cancel Help





2. How SAR Products are Generated?

2.3 Polarimetric SAR (PoISAR) Processing

-  2.3.1 Status
-  2.3.2 Principle
-  2.3.3 Polarimetric Calibration
-  2.3.4 Polarimetric Speckle Filtering
-  2.3.5 Polarization Synthesis
-  2.3.6 Polarimetric Signature
-  2.3.7 Polarimetric Features
-  2.3.8 Polarimetric Decomposition
-  2.3.9 Polarimetric Classification



2.3.1 Status

Over the past 20 years there has been considerable progress in the application of polarimetric SAR data for land observation. The following points contributed to establish the PolSAR technique:

- Increased availability of polarimetric data.
- Development in PolSAR data processing (i.e. calibration, despeckling techniques).
- Development in PolSAR decomposition techniques (analysis of fundamental scattering properties of land surfaces/volumes).
- Development in PolSAR data classification.

Nowadays, new PolSAR techniques make use of model-derived data interpretation (forestry, agriculture, ice/snow surfaces, ...).





2.3.2 Principle

Conventional SAR systems operate within a single, fixed-polarization antenna for both transmission and reception of radio frequency signals. In this way a single radar reflectivity is measured, for a specific transmit and receive polarization combination, for every resolution element of the image. A result of this implementation is that the reflected wave, a vector quantity, is measured as a scalar quantity and any additional information about the scattering process contained in the polarization properties of the scattered signal is lost. To ensure that all the information of the scattered wave is retained, the polarization of the scattered wave must be measured through a vector measurement process, enabling to use both the amplitude and phase information to distinguish between different scattering mechanisms. This differs from other approaches, not only because it is more complete in the sense that more information is used during the information extraction process, but in particular because a better understanding of the radar wave-medium interaction can be gained.


More information is available at <http://earth.esa.int/polinsar/>





2.3.3 Polarimetric Calibration


Polarimetric calibration allows, in general, to minimize the impact of non ideal behaviours of a full-polarimetric SAR acquisition system, to obtain an estimate of the scattering matrix of the imaged objects as accurate as possible from their available measurement. Calibration is applied according to the following model:

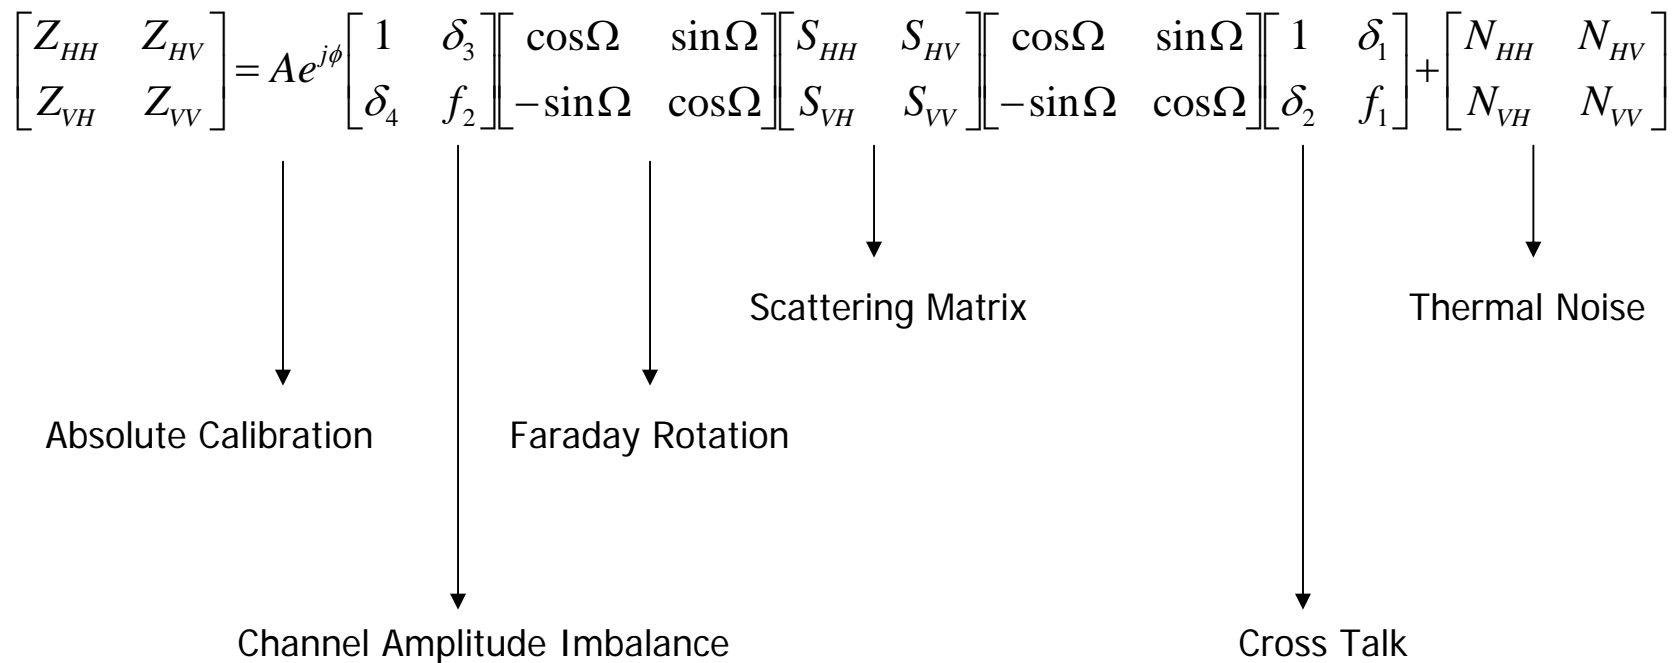



2.3.3 Polarimetric Calibration

SARscape® - Polarimetry and Polarimetric-Interferometry SAR Module

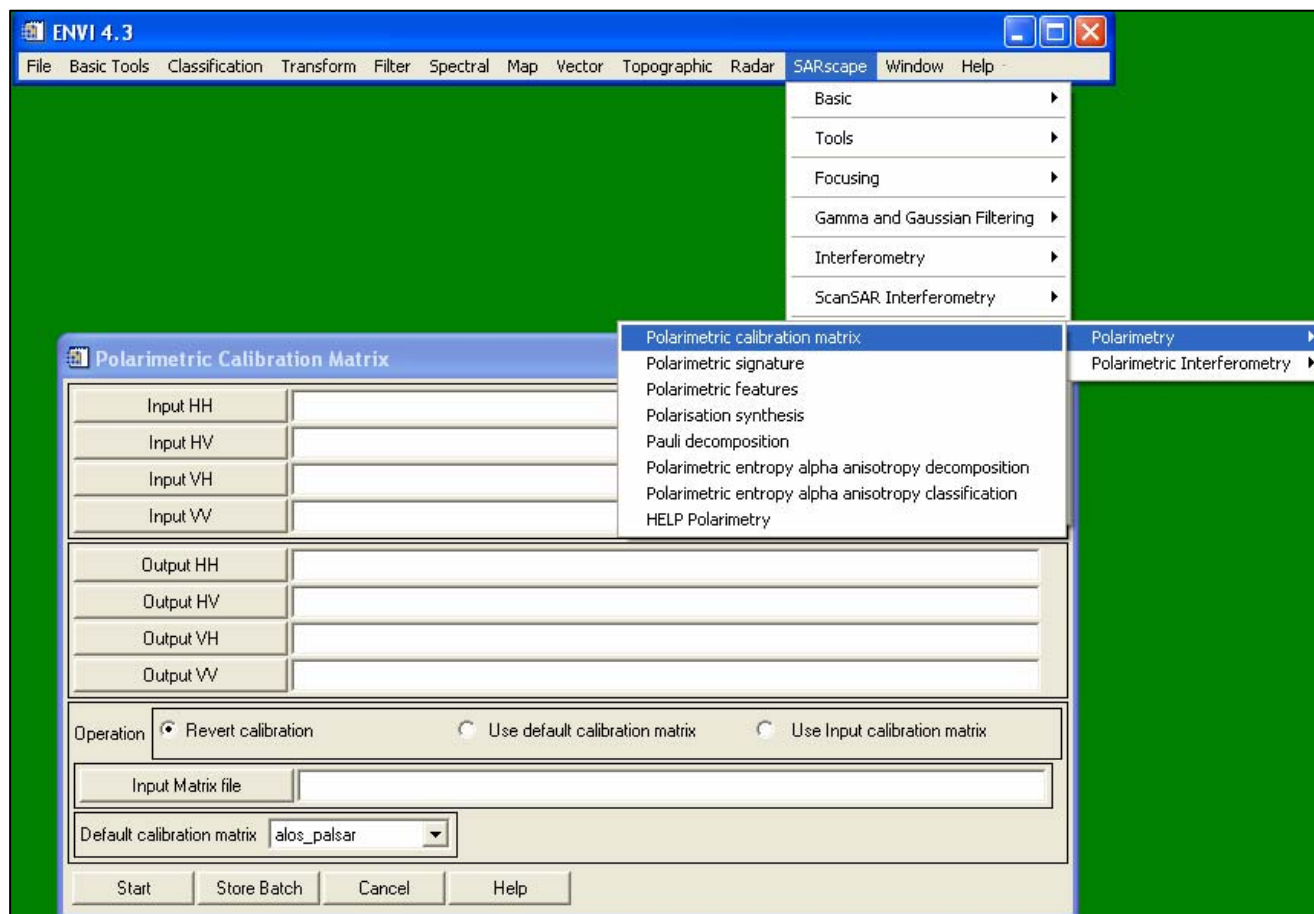

The screenshot shows the ENVI 4.3 SARscape interface. The main window has a menu bar with 'File', 'Basic Tools', 'Classification', 'Transform', 'Filter', 'Spectral', 'Map', 'Vector', 'Topographic', 'Radar', 'SARscape', 'Window', and 'Help'. The 'SARscape' menu is open, showing options: 'Basic', 'Tools', 'Focusing', 'Gamma and Gaussian Filtering', 'Interferometry', and 'ScanSAR Interferometry'. The 'Polarimetry' sub-menu is also open, listing: 'Polarimetric calibration matrix', 'Polarimetric signature', 'Polarimetric features', 'Polarisation synthesis', 'Pauli decomposition', 'Polarimetric entropy alpha anisotropy decomposition', 'Polarimetric entropy alpha anisotropy classification', and 'HELP Polarimetry'. The 'Polarimetric Calibration Matrix' dialog box is in the foreground, containing:

- Input fields for HH, HV, VH, and VV.
- Output fields for HH, HV, VH, and VV.
- Operation options: Revert calibration, Use default calibration matrix, Use Input calibration matrix.
- Input Matrix file: [Empty text box]
- Default calibration matrix: alos_palsar (dropdown menu)
- Buttons: Start, Store Batch, Cancel, Help.





2.3.4 Polarimetric Speckle Filtering

The multiplicative speckle model for the single polarization case (refer to Section 1.5) may be extended to the polarimetric case by considering that polarimetric channels are affected by independent multiplicative speckle components.

Two fully polarimetric statistically adaptive speckle filters for single or multi-look polarimetric SAR are proposed: the Wishart-Gamma Maximum A Posteriori, and the Distribution-Entropy Maximum A Posteriori filter. Both filters use the same speckle model. Moreover, for low look correlation, the conditional probability density function of the covariance matrix of the speckle measurement is modelled by a complex Wishart distribution.


The complex Wishart-Gamma Maximum A Posteriori uses an a priori knowledge about the scene, which is modelled by a Gamma distributed scalar parameter equal to the normalized number of scatterers by resolution cell. This model is suited to ensure a satisfactory adaptivity of the filter to restore most textured scenes at the usual spaceborne and airborne SAR resolutions, when the detected intensity channels can be assumed as being K-distributed.





2.3.4 Polarimetric Speckle Filtering

SARscape® - Gamma and Gaussian Filter Module

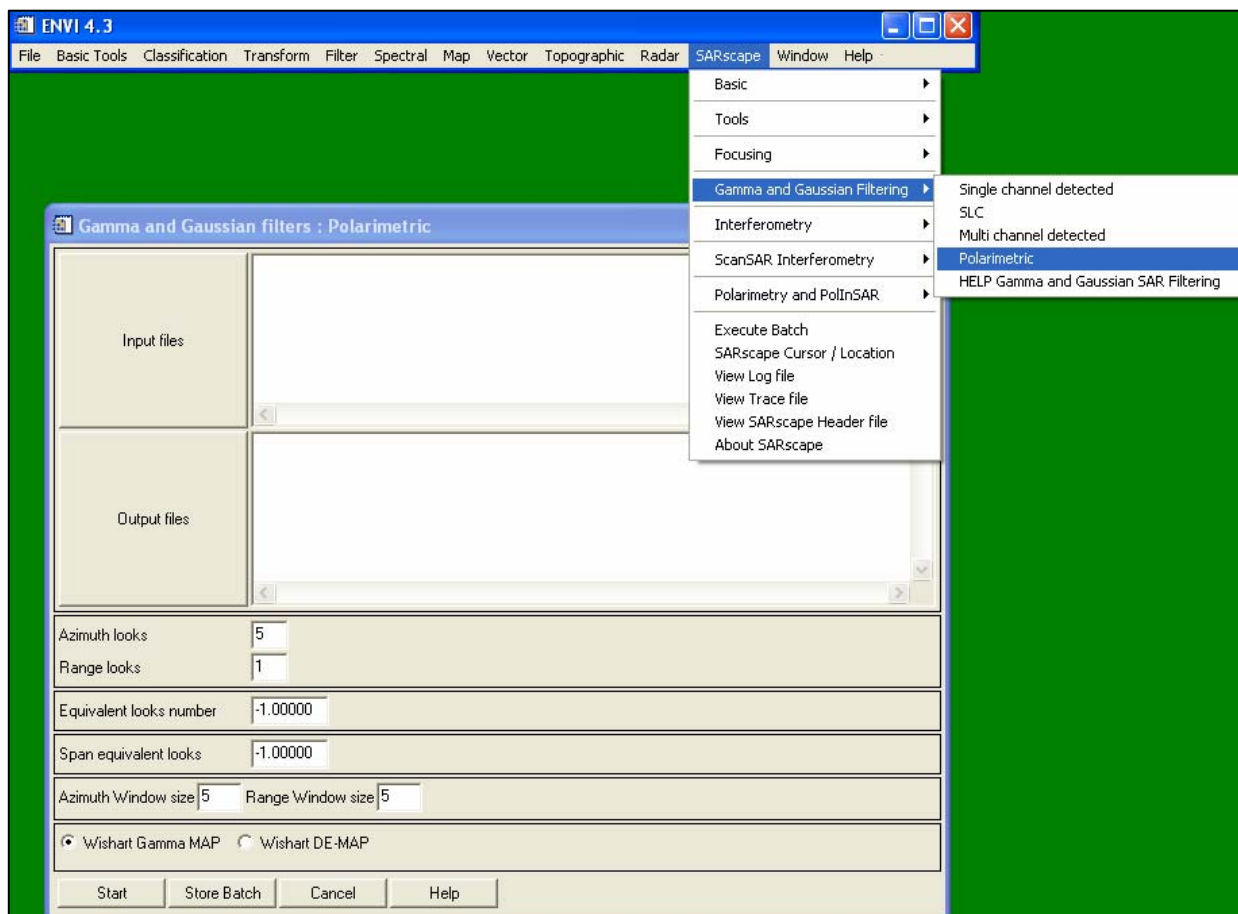



2.3.5 Polarization Synthesis

Knowledge of the scattering matrix (i.e. the 2×2 complex elements, where the diagonal elements are the co-polar (HH, VV) terms, while the off-diagonal are known as cross-polar (HV, VH) terms) permits estimation of the received power for any possible combination of transmitting and receiving antennas (i.e. polarization synthesis or formation of the scattering matrix in any arbitrary polarization basis). This technique is what gives polarimetry its great advantage over conventional fixed-polarization radars - more information may be inferred about the scattering mechanisms on surfaces or within volumes if the scattering matrix can be measured.


The picture shows a polarization synthesis based on Shuttle Imaging Radar data acquired during the third radar shuttle mission (SIR-C) over the area of Flevoland (The Netherlands). The image has been generated by combining the three polarizations HH, VV, and HV in the red, green, and blue channels respectively.





2.3.5 Polarization Synthesis


SARscape® - Polarimetry and Polarimetric-Interferometry SAR Module

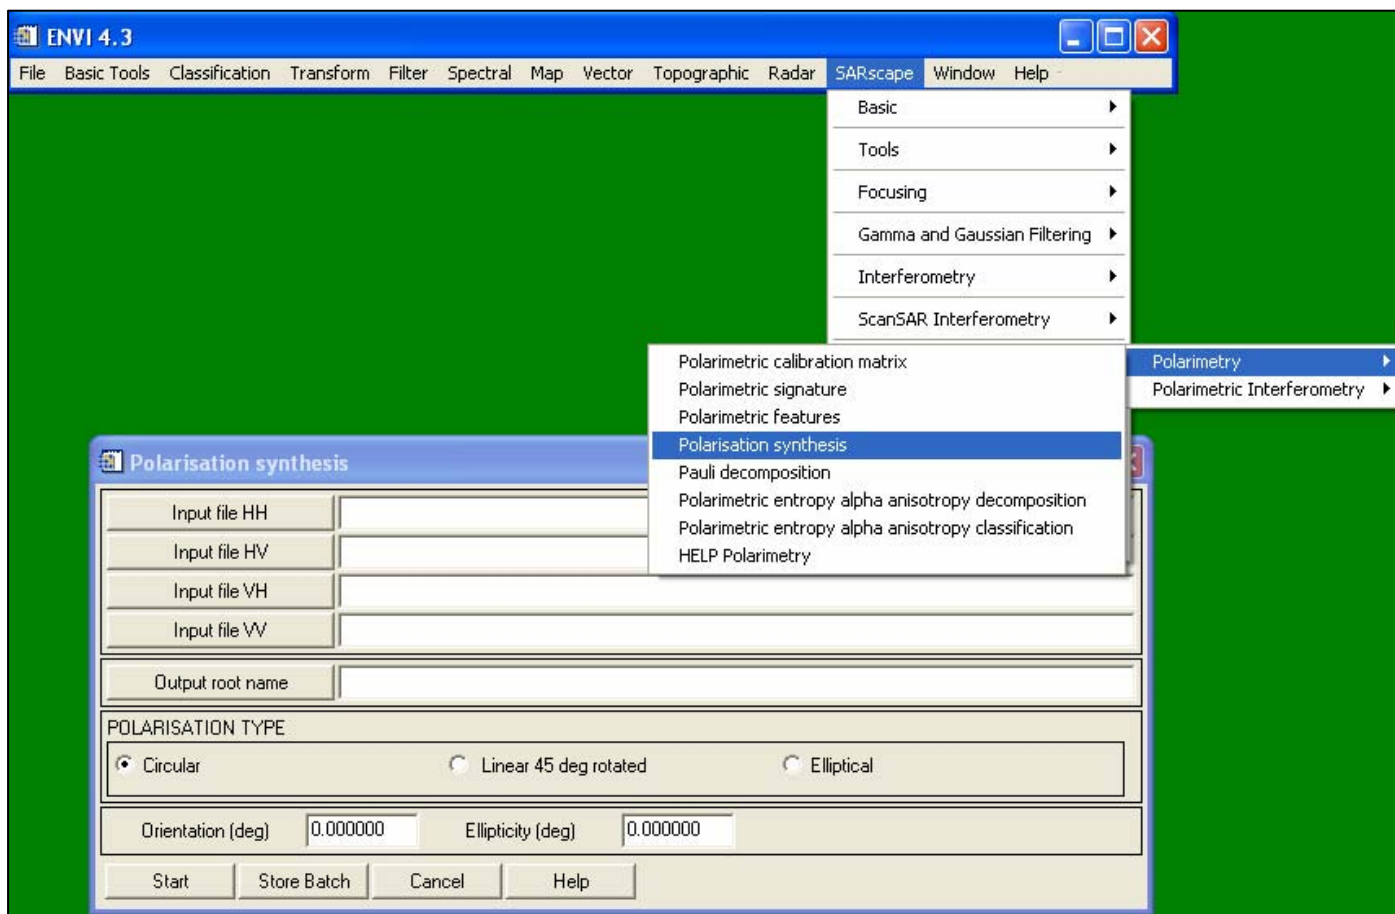



2.3.6 Polarization Signature


A particular graphical representation of the variation of backscattering as a function of polarization, known as polarization signature (see Figure), is quite useful for describing polarization properties of a target. The response consists of a plot of synthesized (and normalized) scattering cross sections as a function of the ellipticity and orientation angles of the received wave.

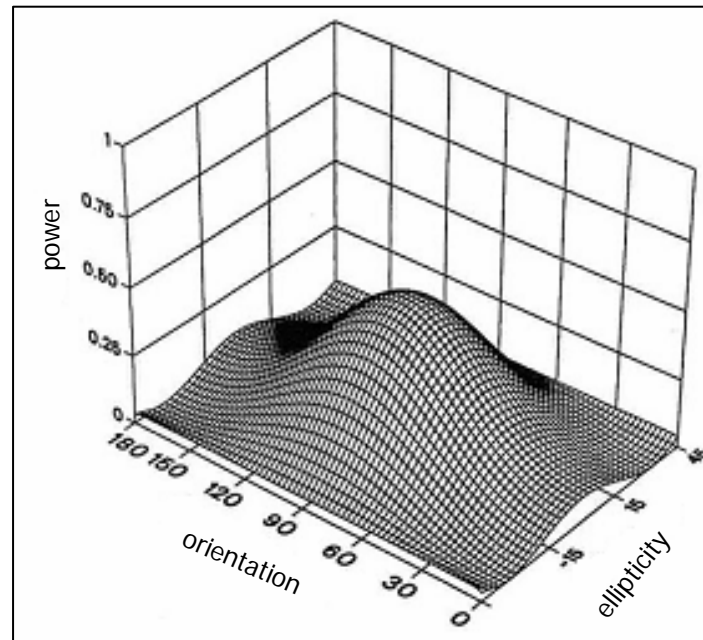



2.3.6 Polarization Signature

SARscape® - Polarimetry and Polarimetric-Interferometry SAR Module

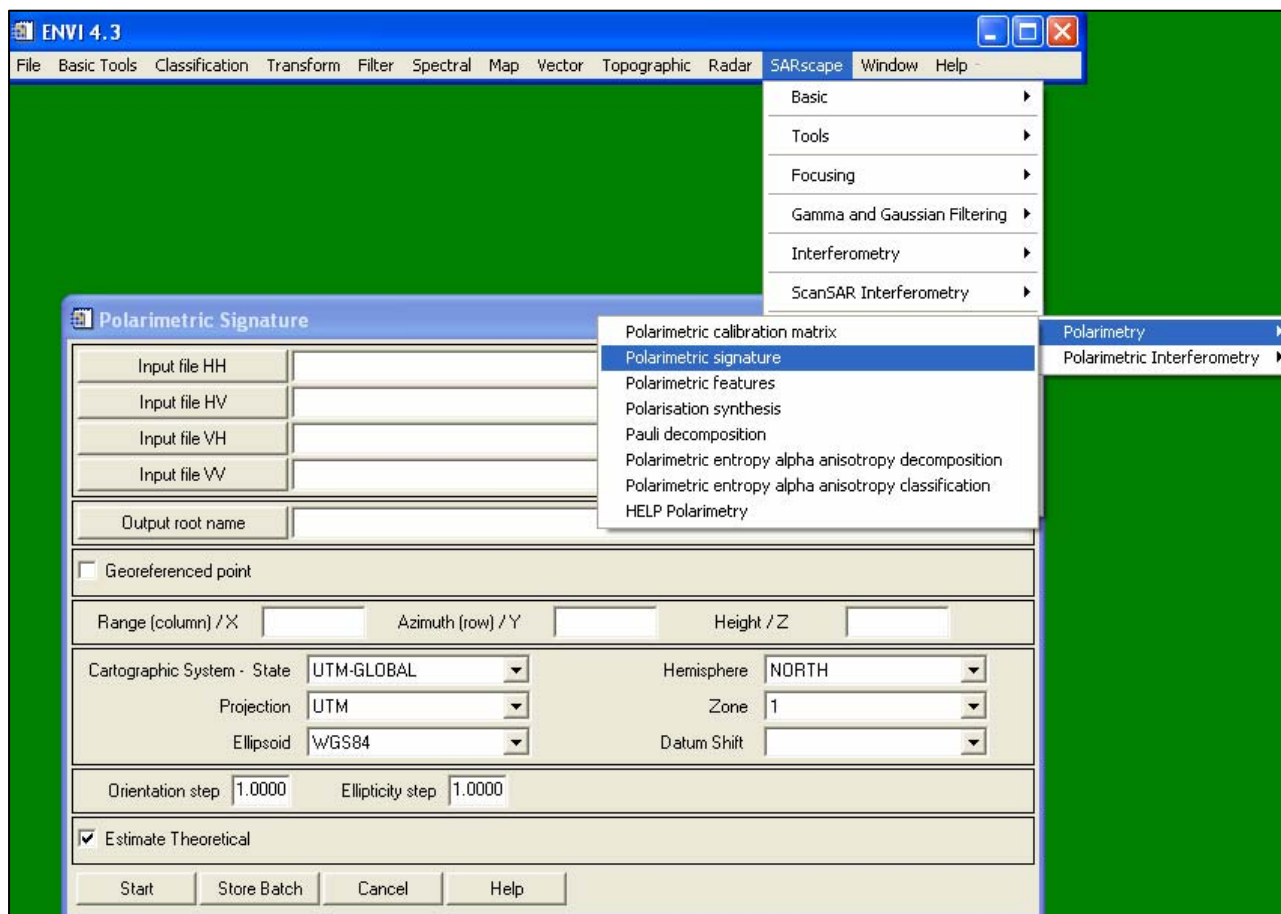



2.3.7 Polarimetric Features

The simplest way to represent the polarimetric information contained in the scattering or Stokes matrix is given by calculating some co- and cross polarized power, as well as selected ratios. Furthermore, these polarimetric features enable, to some extent, to identify the most suitable combinations for classification purposes. They are:

- $\text{Span} = \text{HH} + \text{HV} + \text{VH} + \text{VV}$
- HH HH^*
- VV VV^*
- HV HV^*
- $\text{Re} \{ \text{HH VV}^* \}$
- $\text{Im} \{ \text{HH VV}^* \}$
- $\text{Re} \{ \text{HV VV}^* \}$
- $\text{Im} \{ \text{HV VV}^* \}$
- $\text{Re} \{ \text{HH HV}^* \}$
- $\text{Im} \{ \text{HH HV}^* \}$
- $\text{Polarization Ratio} = \text{HH HH}^* / \text{VV VV}^*$
- $\text{Linear Depolarization Ratio} = \text{HV HV}^* / \text{VV VV}^*$





2.3.7 Polarimetric Features

SARscape® - Polarimetry and Polarimetric-Interferometry SAR Module

The screenshot shows the ENVI 4.3 SARscape interface. The main window title is "ENVI 4.3" and the menu bar includes "File", "Basic Tools", "Classification", "Transform", "Filter", "Spectral", "Map", "Vector", "Topographic", "Radar", "SARscape", "Window", and "Help". The "SARscape" menu is open, showing options: "Basic", "Tools", "Focusing", "Gamma and Gaussian Filtering", "Interferometry", and "ScanSAR Interferometry". The "Polarimetry" sub-menu is also open, listing: "Polarimetric calibration matrix", "Polarimetric signature", "Polarimetric features", "Polarisation synthesis", "Pauli decomposition", "Polarimetric entropy alpha anisotropy decomposition", "Polarimetric entropy alpha anisotropy classification", and "HELP Polarimetry".

The "Polarimetric features" dialog box is open, containing the following fields and options:

- Input file HH: []
- Input file HV: []
- Input file VH: []
- Input file VV: []
- Output root name: []
- Features:
 - Span
 - HV HV*
 - Re {HV W*}
 - Re {HH HV*}
 - Polarization ratio
 - HH HH*
 - Re {HH W*}
 - Im {HV W*}
 - Im {HH HV*}
 - Linear depolarization ratio
 - W W*
 - Im {HH W*}
 - Normalize
- Azimuth looks: 5
- Range looks: 1
- Buttons: Start, Store Batch, Cancel, Help





2.3.8 Polarization Decomposition

The objective of the **coherent decomposition** is to express the measured scattering matrix S as the combination of the scattering responses of simpler objects.

$$[S] = \sum_{i=1}^k c_i [S]_i$$

The symbol S_i stands for the response of every one simpler objects, whereas c_i indicates the weight of S_i in the combination leading to the measured S .

It has to be pointed out that the scattering matrix S can characterise the scattering processes produced by a given object, and therefore the object itself. This is possible only in those cases in which both, the incident and scattered waves are completely polarized waves. Consequently, coherent target decompositions can be only employed to study the coherent targets. These scatters are known as point or pure targets.





2.3.8 Polarization Decomposition

In a real situation, the measured scattering matrix S corresponds to a complex coherent target. Therefore, in a general situation, a direct analysis of the scattering matrix, with the objective to infer the physical properties of the scatterer under study, has shown to be very difficult. Thus, the physical properties of the scatterer are extracted and interpreted through the analysis of simpler responses S_i and corresponding coefficients c_i .

The decomposition exposed on the previous page is not unique in the sense that it is possible to find a number of infinite sets S_i in which the scattering matrix S can be decomposed. Nevertheless, only some of the sets S_i are convenient to interpret the information content of S . Three methods are employed to characterize **coherent scatterers** based on the scattering matrix S :

- The Pauli Decomposition
- The Krogager Decomposition
- The Cameron Decomposition





2.3.8 Polarization Decomposition

The scattering matrix S is only able to characterize, from a polarimetric point of view, coherent scatterers. On the contrary, this matrix can not be employed to characterize distributed targets. This type of scatterers can be only characterized, statistically, due to the presence of speckle noise. Since speckle noise must be reduced, only second order polarimetric representations can be used to analyse distributed scatterers. These second order descriptors are the 3 by 3, Hermitian average covariance (C) and the coherency (T) matrices. These two representations are equivalent.

The complexity of the scattering process makes the physical study of a given scatter through the analysis of C or T extremely difficult. Hence, the objective of the **incoherent decompositions** is to separate the C or T matrices as the combination of the second order descriptors corresponding to simpler objects, presenting an easier physical interpretation. These decomposition theorems can be expressed as:

$$\langle [C_3] \rangle = \sum_{i=1}^k p_i [C_3]_i$$
$$\langle [T_3] \rangle = \sum_{i=1}^k q_i [T_3]_i$$

where p_i and q_i denote the coefficients of the components in C and T .





2.3.8 Polarization Decomposition

As in the case of the coherent decomposition, it is desirable that these components present some properties. First of all, it is desirable that the components C_i and T_i correspond to pure targets in order to simplify the study. In addition, the components should be independent, i.e. orthogonal. The bases in which C or T are not unique. Consequently different **incoherent decompositions** can be expressed. They are:


- The Freeman Decomposition
- The Huynen Decomposition
- The Eigenvector-Eigenvalue Decomposition

In the next page an overview of the different **coherent** and **incoherent decompositions** is given.





2.3.8 Polarization Decomposition

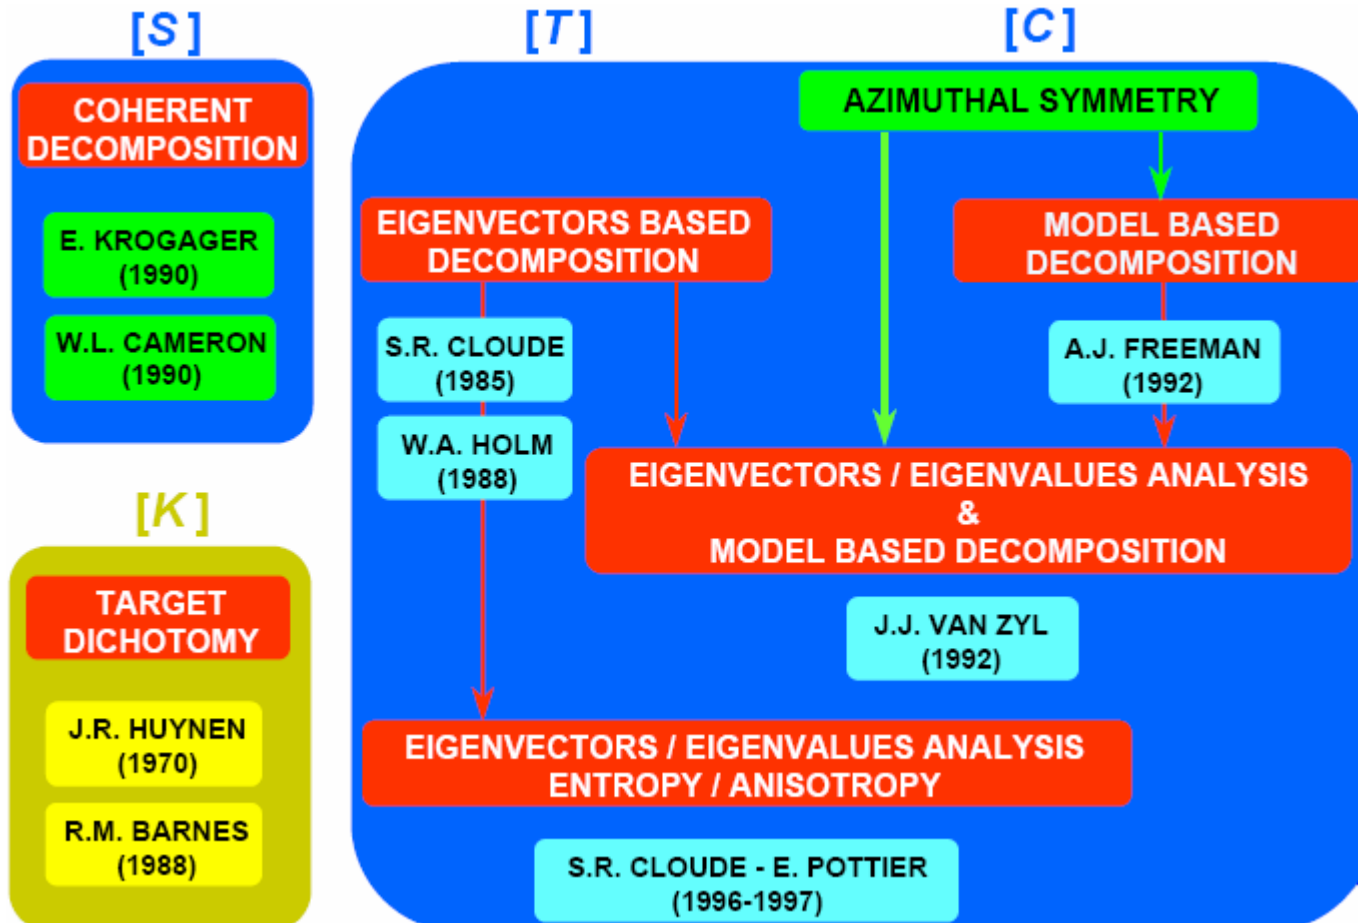


© ESA





2.3.8 Polarization Decomposition

SARscape® - Polarimetry and Polarimetric-Interferometry SAR Module

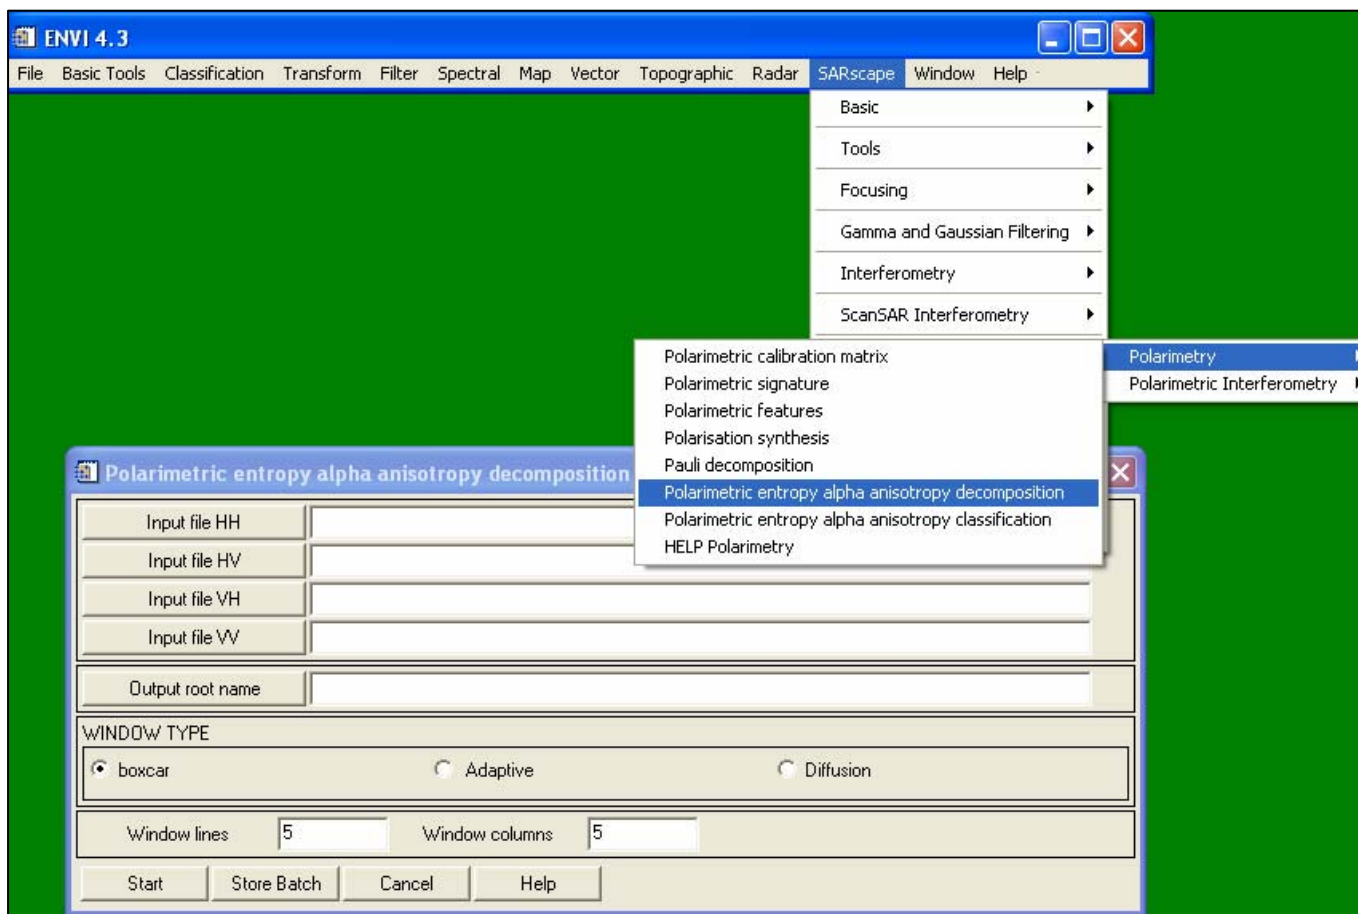



2.3.9 Polarization Classification


Cloude and Pottier proposed an algorithm to identify in an unsupervised way polarimetric scattering mechanisms in the H- α (Entropy-Mean alpha angle) plane. The basic idea is that entropy arises as a natural measure of the inherent reversibility of the scattering data and that the mean alpha angle can be used to identify the underlying average scattering mechanism.

The H- α plane is divided in 9 basic zones characteristic of different scattering behaviours (see Figure in the next page). The basic scattering mechanism of each pixel can be identified by comparing its entropy and mean alpha angle parameters to fixed thresholds. The different class boundaries, in the H- α plane, have been determined so as to discriminate surface reflection, volume diffusion, and double bounce reflection along the α axis and low, medium, and high degree of randomness along the H axis.





2.3.9 Polarization Classification

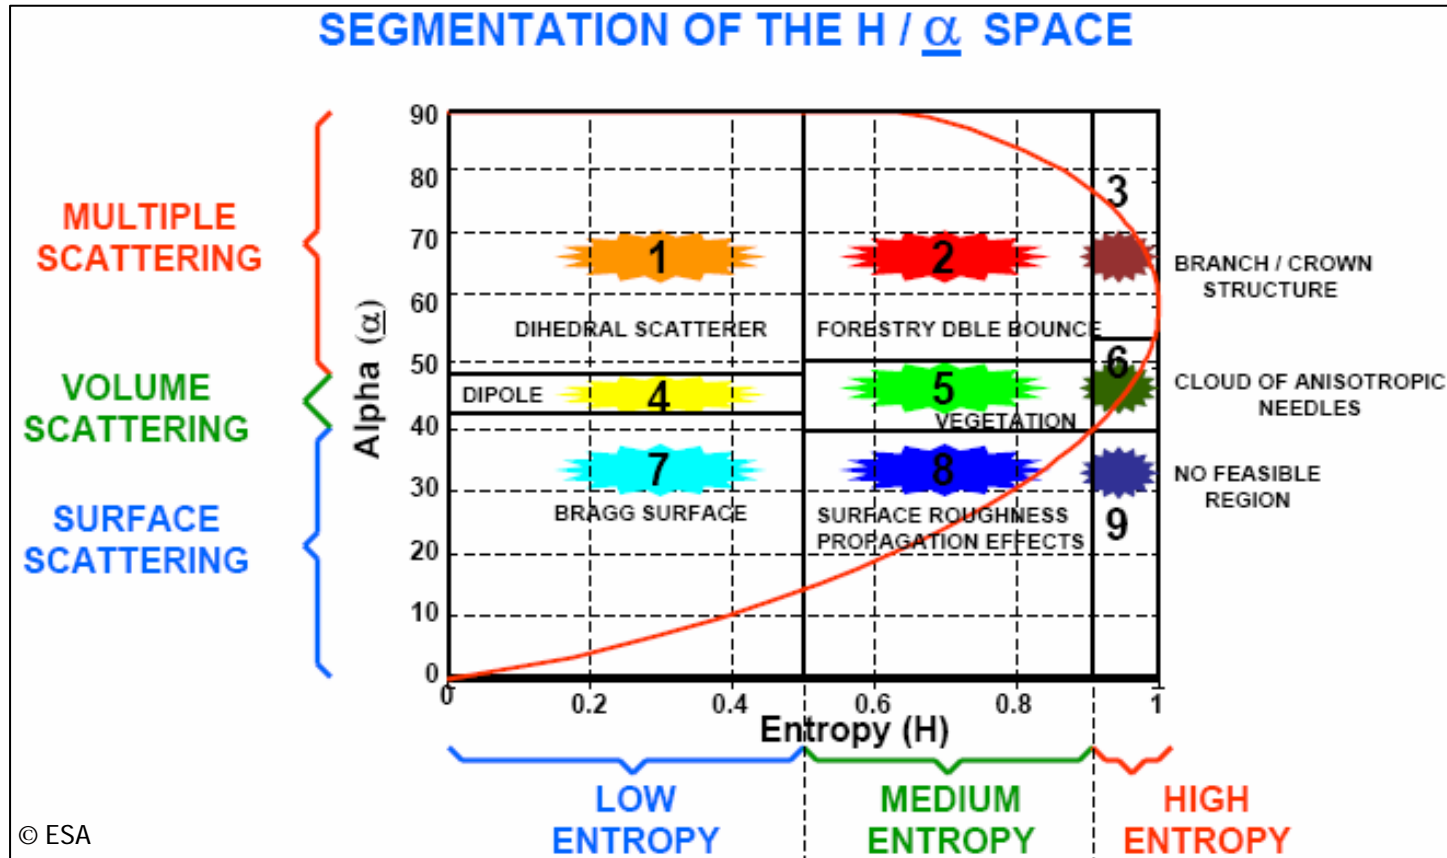




2.3.9 Polarization Classification

The presented procedure may be further improved by explicitly including the anisotropy information (see Figure in the next page). This polarimetric indicator is particularly useful to discriminate scattering mechanisms with different eigenvalue distributions but with similar intermediate entropy values. In such cases, a high anisotropy value indicates two dominant scattering mechanisms with equal probability and a less significant third mechanism, while a low anisotropy value corresponds to a dominant first scattering mechanism and two non-negligible secondary mechanisms with equal importance.






2.3.9 Polarization Classification

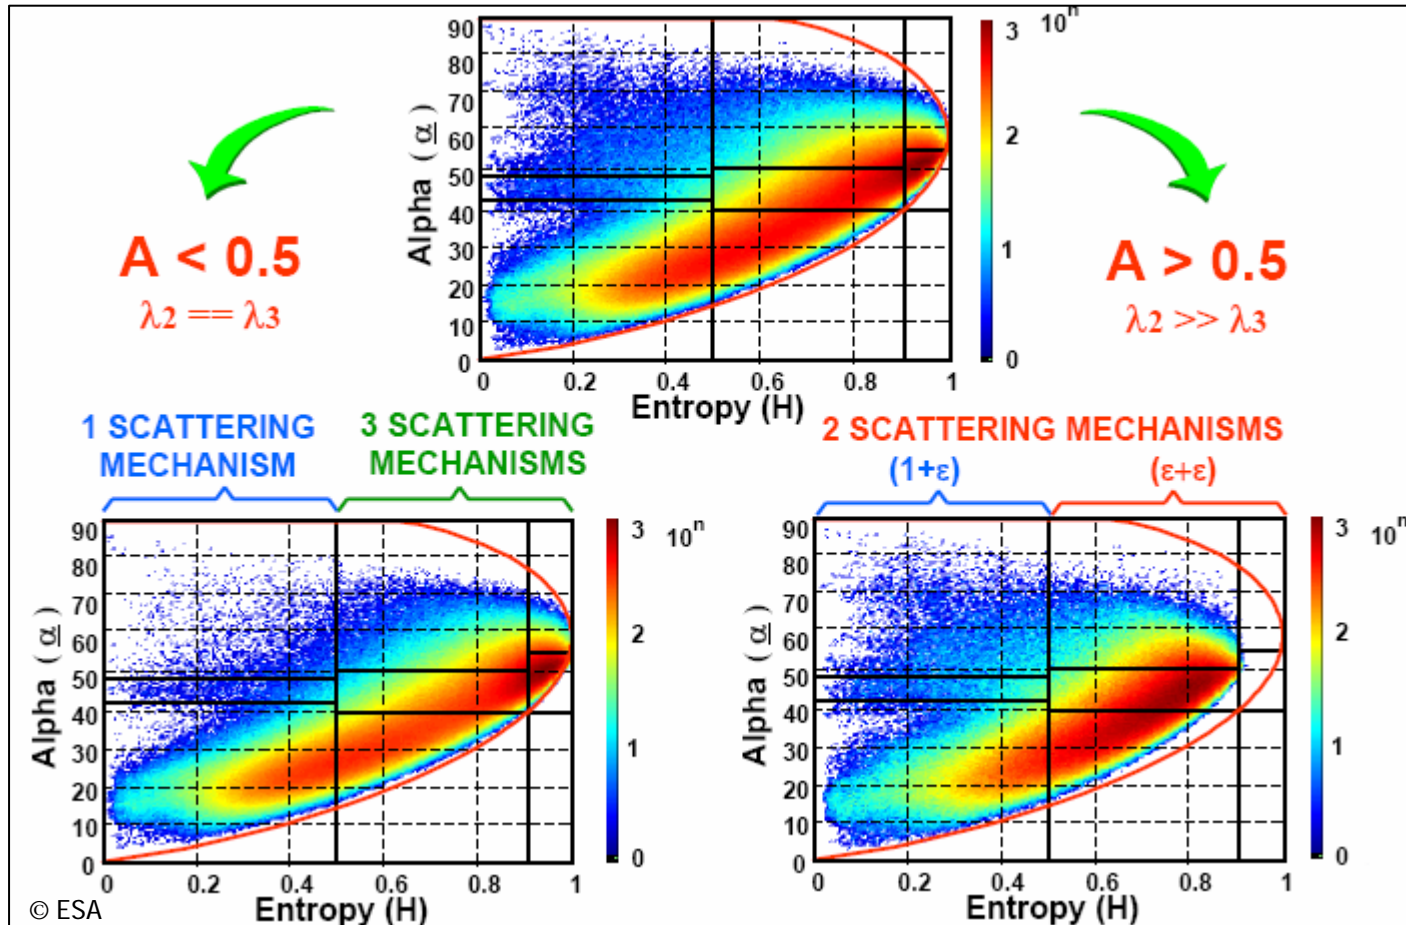



2.3.9 Polarization Classification

SARscape[®] - Polarimetry and Polarimetric-Interferometry SAR Module

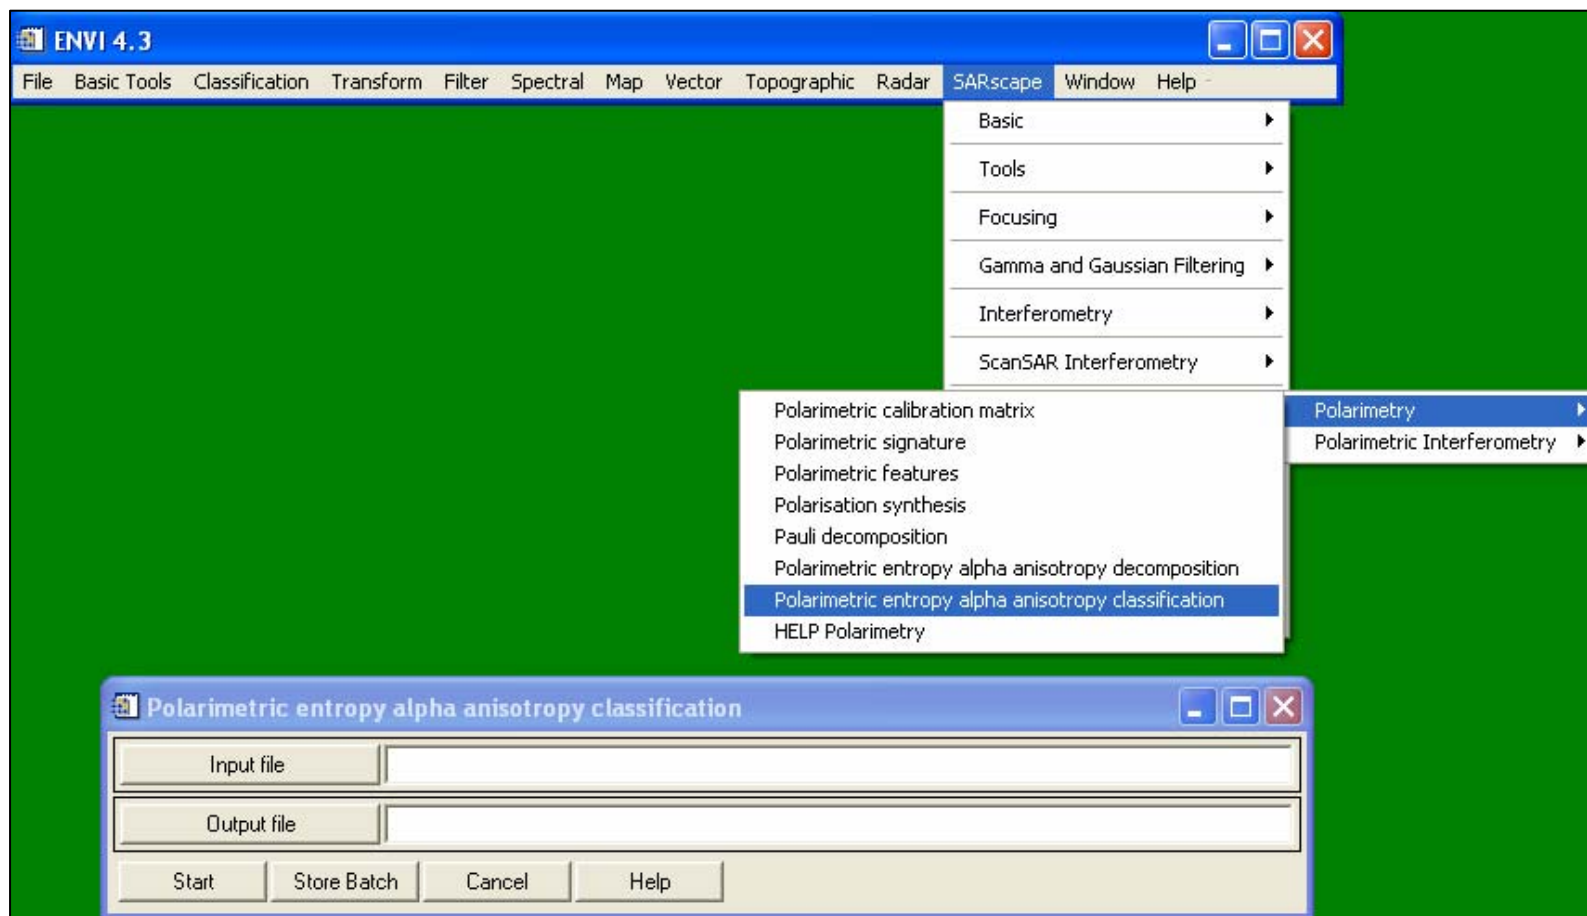



2. How SAR Products are Generated?

2.4 Polarimetric-Interferometric SAR (PolInSAR) Processing

-  2.4.1 Principle
-  2.4.2 Co-registration
-  2.4.3 Interferogram Generation
-  2.4.4 Polarimetric Coherence
-  2.4.5 Coherence Optimization



2.4.1 Principle

Polarimetric interferometry and coherence optimization are an extension of conventional interferometry to the case where the interfered pairs are not constituted by single images, but by full-polarimetric datasets, originating the case of vector interferometry as opposed to scalar interferometry (see Figure next page).


Basically, interferometric SAR measurements are sensitive to the spatial distribution of the scatterers, polarimetric SAR measurements are related to the orientation and/or dielectric properties of the scatterers. While using lower system frequencies (i.e. L- or P-band), the combination of the two techniques allows the analysis of the spatial distribution of the polarimetric scattering mechanisms within scattering volumes (vegetation, snow/ice, ...).

More information is available at <http://earth.esa.int/polinsar/>





2.4.1 Principle

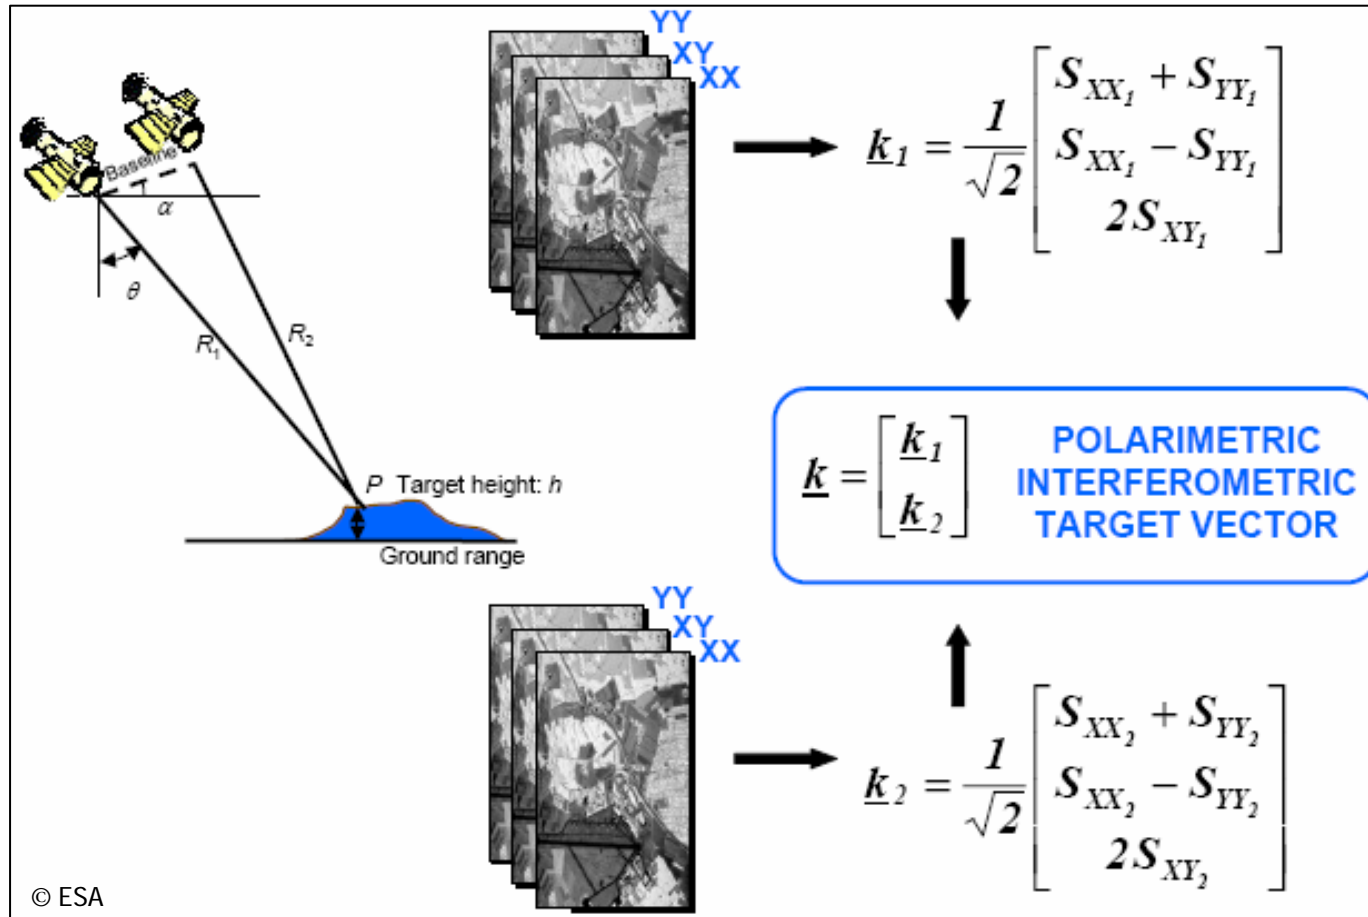



2.4.2 Co-registration

Interferometric and polarimetric-interferometric processing extracts information from pairs of complex SAR data (SLCs). For this reason SAR image pairs must be co-registered. The coregistration process is divided into two steps: i) estimation of the relative shifts between a reference and a slave image, and, ii) interpolation of the slave image to accomplish for the estimated shifts. The shift is estimated using the first image of the two lists as master and respectively slave image, while the same estimated shift is applied to the whole list of slave images, to avoid relative misalignments. It is therefore recommended that the polarization for which the higher coherence (usually HH) may be expected is provided as first of the input file lists.

The shift is calculated in 3 steps:


1. Coarse estimate based on the orbit information.
2. Master to slave amplitude image cross-correlation.
3. Fine shift calculation based on the phase information. During this step spectral shift and common Doppler bandwidth filtering are performed.





2.4.2 Co-registration

SARscape® - Polarimetry and Polarimetric-Interferometry SAR Module

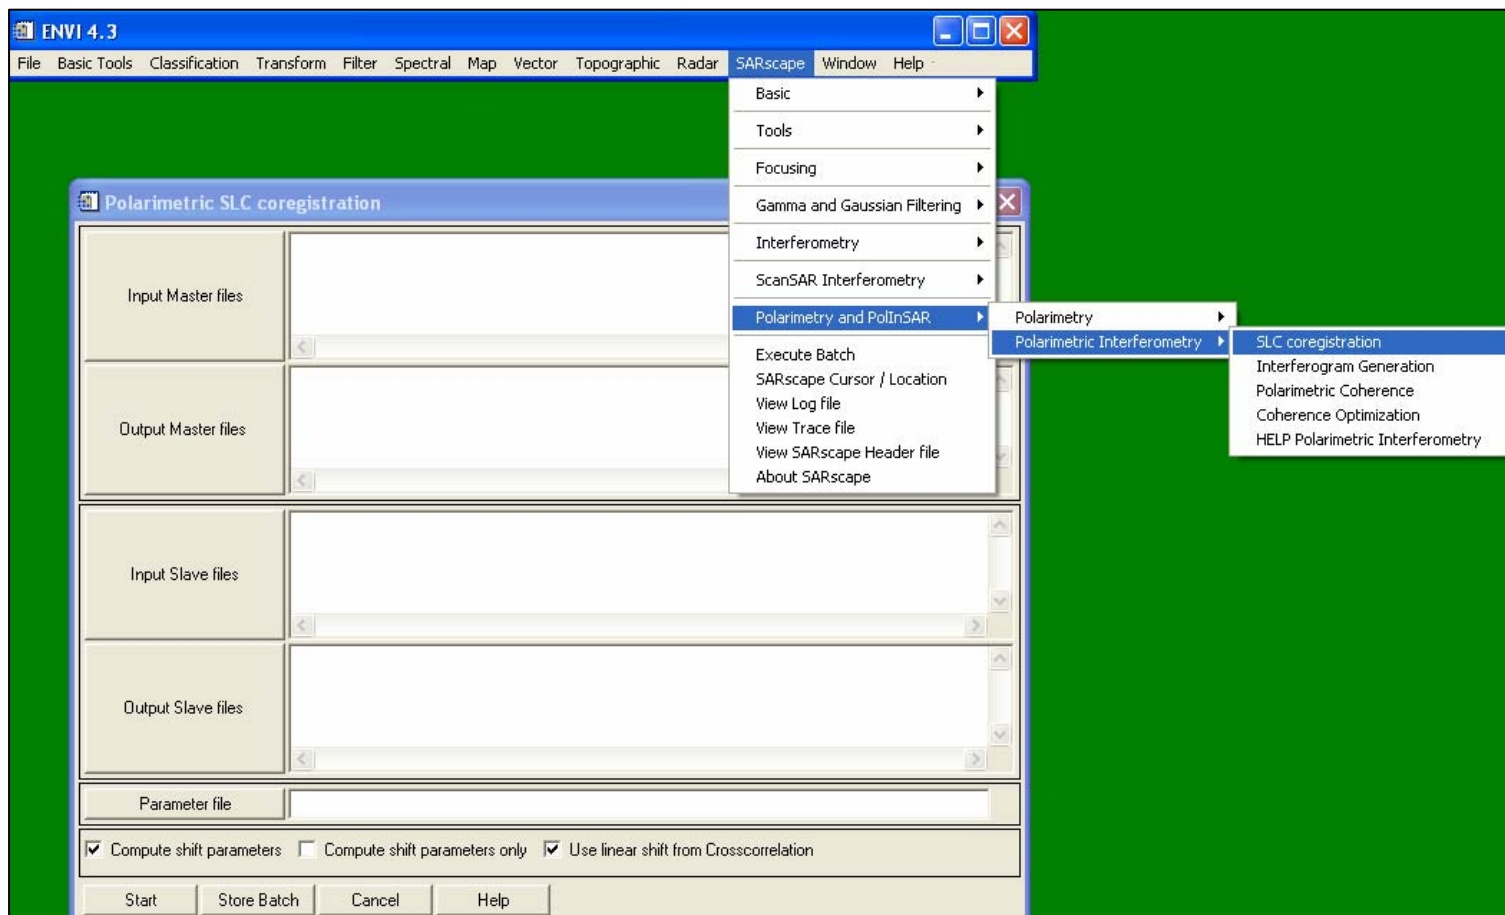



2.4.3 Interferogram Generation

For each resolution element two co-registered scattering matrices are available. The complete information measured by the SAR system can be represented in form of three 3 by 3 complex matrices T_{11} , T_{22} , and Ω_{12} formed by using the outer products of the scattering vectors k_1 and k_2 as

$$T_{11} = k_1^T \cdot k_1 \quad T_{22} = k_2^T \cdot k_2 \quad \Omega_{12} = k_1^T \cdot k_2$$

T_{11} and T_{22} are the conventional polarimetric coherency matrices which describe the polarimetric properties for each individual image separately, and Ω_{12} is a complex matrix containing polarimetric and interferometric information. The two complex scalar images i_1 and i_2 for forming the interferogram are obtained by projecting the scattering vectors k_1 and k_2 onto two unitary complex vectors w_1 and w_2 , which define the polarization of the two images respectively as:

$$i_1 = w_1^T \cdot k_1 \quad \text{and} \quad i_2 = w_2^T \cdot k_2$$

The interferogram related to the polarizations given by w_1 and w_2 is then

$$i_1 i_2^* = (w_1^T \cdot k_1) (w_2^T \cdot k_2)^*$$





2.4.3 Interferogram Generation

Two cases should be distinguished:

- w_1 is equal to w_2 , i.e. images with the same polarization are used to form an interferogram. In this case the interferometric phase contains only the interferometric contribution due to the topography and range variation, while the interferometric coherence expresses the interferometric correlation behaviour.
- w_1 is not equal w_2 , i.e. images with different polarizations are used to form the interferogram. In this case the interferometric phase contains besides the interferometric also the phase difference between the two polarizations. The interferometric coherence expresses apart from the interferometric correlation behaviour also the polarimetric correlation between the two polarizations.


$$\gamma(w_1, w_2) = \gamma_{\text{Int}} \cdot \gamma_2$$





2.4.3 Interferogram Generation

SARscape® - Polarimetry and Polarimetric-Interferometry SAR Module

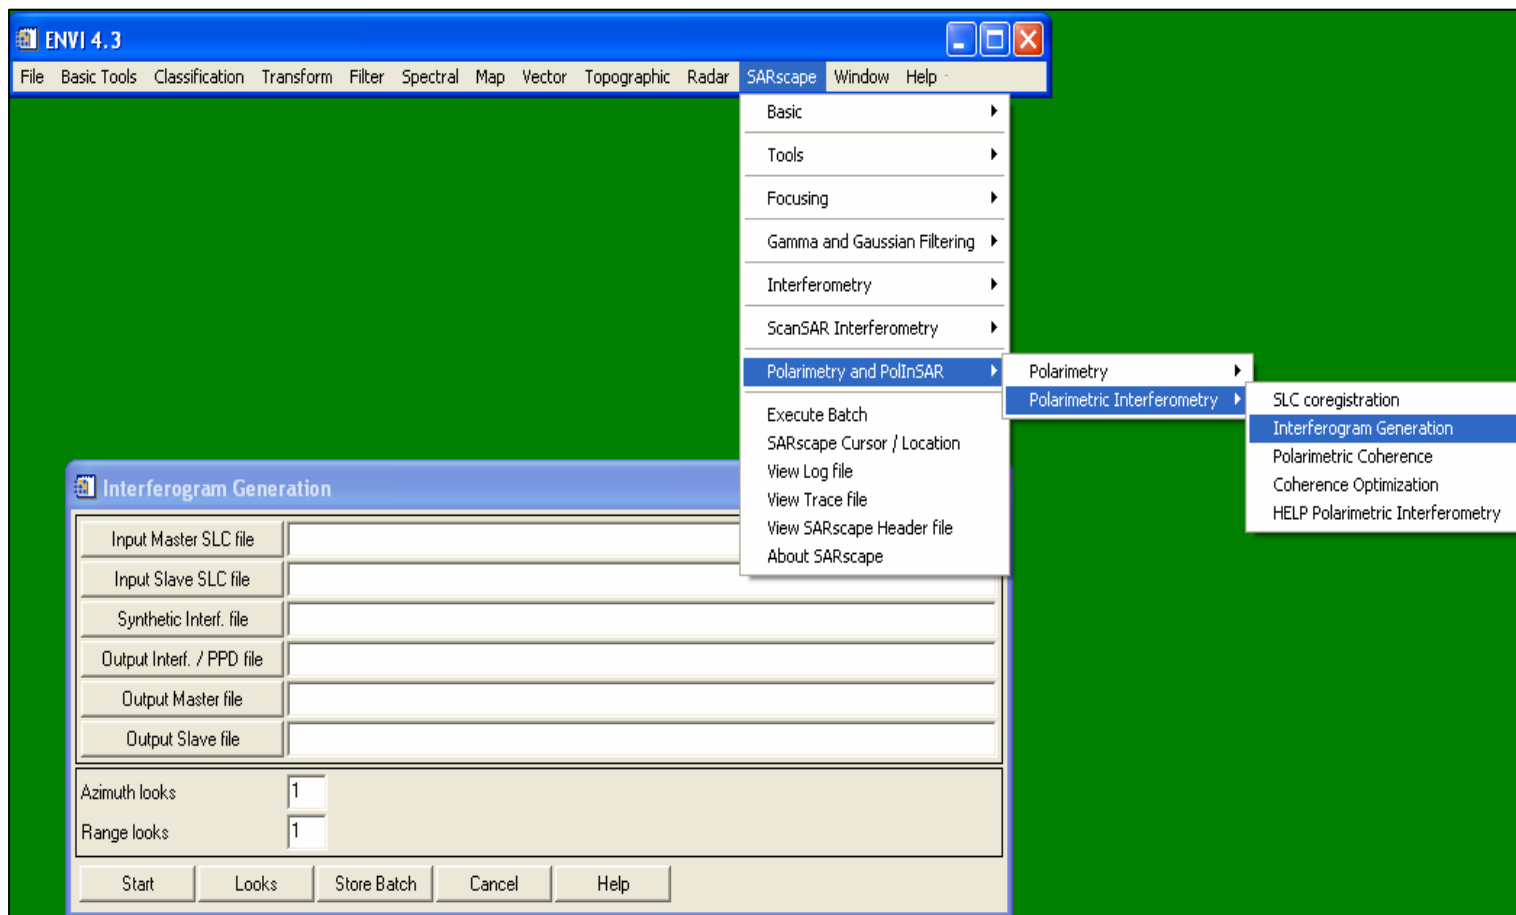

The screenshot shows the ENVI 4.3 SARscape interface. The main window title is "ENVI 4.3" and the menu bar includes "File", "Basic Tools", "Classification", "Transform", "Filter", "Spectral", "Map", "Vector", "Topographic", "Radar", "SARscape", "Window", and "Help". The "SARscape" menu is open, showing options: "Basic", "Tools", "Focusing", "Gamma and Gaussian Filtering", "Interferometry", "ScanSAR Interferometry", "Polarimetry and PolInSAR", "Execute Batch", "SARscape Cursor / Location", "View Log file", "View Trace file", "View SARscape Header file", and "About SARscape". The "Polarimetry and PolInSAR" sub-menu is also open, showing: "Polarimetry", "Polarimetric Interferometry", "SLC coregistration", "Interferogram Generation", "Polarimetric Coherence", "Coherence Optimization", and "HELP Polarimetric Interferometry".

The "Interferogram Generation" dialog box is open in the foreground. It contains the following fields and controls:

- Input Master SLC file:
- Input Slave SLC file:
- Synthetic Interf. file:
- Output Interf. / PPD file:
- Output Master file:
- Output Slave file:
- Azimuth looks:
- Range looks:
- Buttons: Start, Looks, Store Batch, Cancel, Help





2.4.4 Polarimetric Coherence

Based on the formulations obtained in Sections 2.4.3 (Interferogram Generation) and 2.3.4 (Coherence) the general formulation of the interferometric coherence is derived as:

$$\tilde{\gamma}(\bar{w}_1, \bar{w}_2) = \frac{\langle i_1 i_2^* \rangle}{\sqrt{\langle i_1 i_1^* \rangle \langle i_2 i_2^* \rangle}} = \frac{\langle \bar{w}_1 [\Omega] \bar{w}_2^+ \rangle}{\sqrt{\langle (\bar{w}_1 [T] \bar{w}_1^+) \rangle \langle (\bar{w}_2 [T] \bar{w}_2^+) \rangle}}$$


where T_{11} and T_{22} are the conventional polarimetric coherency matrices which describe the polarimetric properties for each individual image separately, Ω_{12} is a complex matrix containing polarimetric and interferometric information, w_1 and w_2 the two unitary complex vectors.





2.4.4 Polarimetric Coherence

SARscape® - Polarimetry and Polarimetric-Interferometry SAR Module

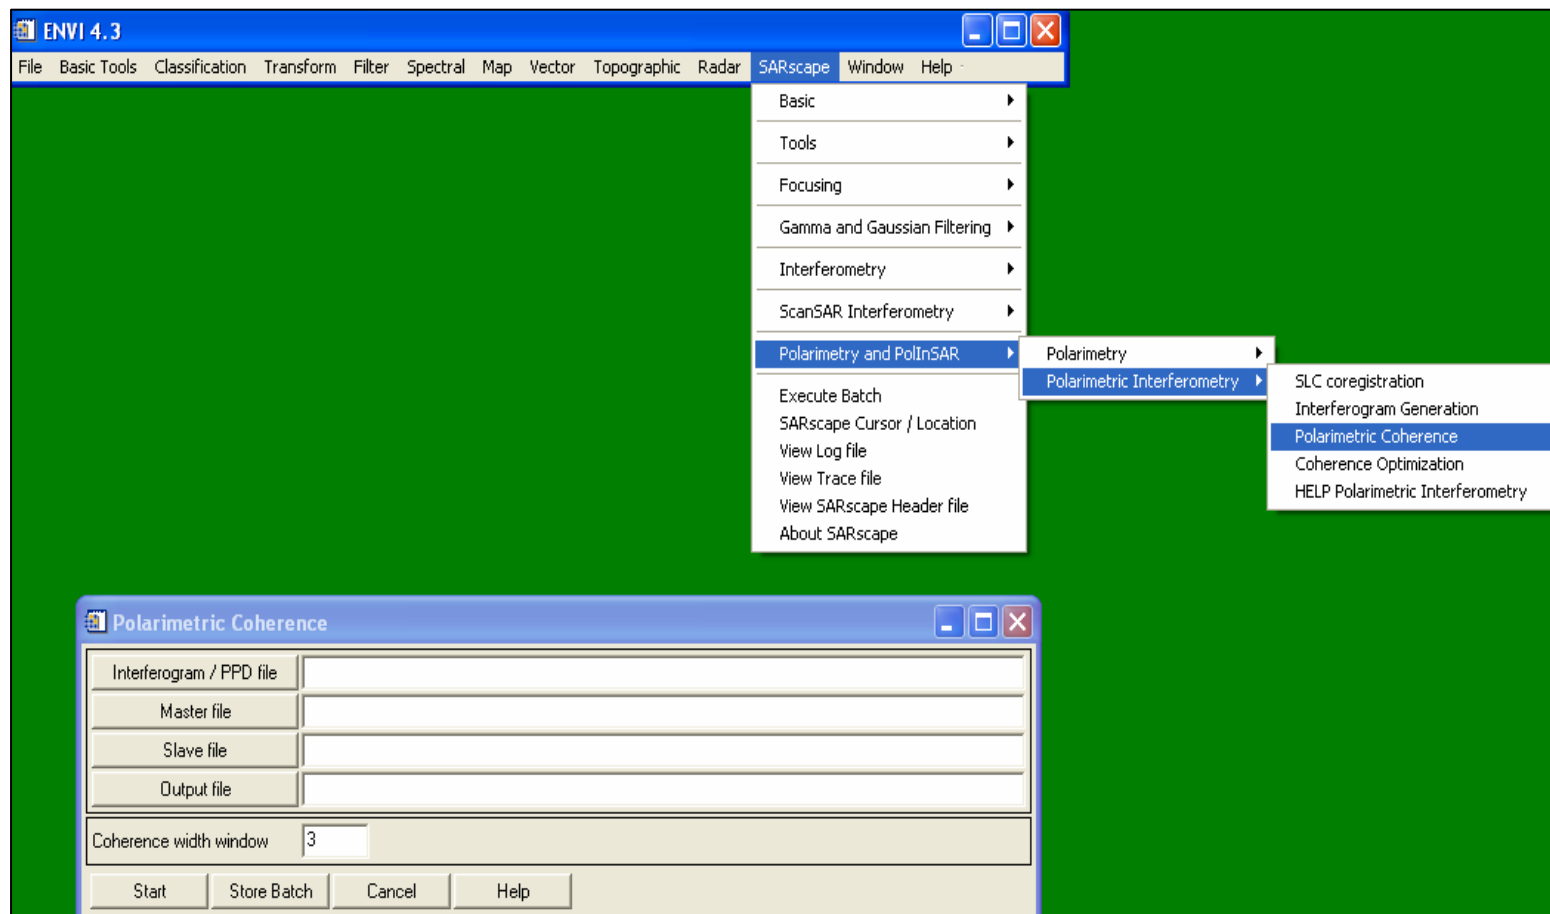

The screenshot shows the ENVI 4.3 interface with the SARscape menu open. The menu path is SARscape > Polarimetry and PolInSAR > Polarimetric Interferometry > Polarimetric Coherence. A dialog box titled "Polarimetric Coherence" is open in the foreground, containing the following fields and controls:

- Interferogram / PPD file:
- Master file:
- Slave file:
- Output file:
- Coherence width window:
- Buttons: Start, Store Batch, Cancel, Help





2.4.5 Coherence Optimization

The dependency of the interferometric coherence on the polarization of the images used to form the interferogram leads to consider the question of which polarization yields the highest coherence. In essence, the problem is to optimize the general formulation of the interferometric coherence, i.e.

$$\tilde{\gamma}(\bar{w}_1, \bar{w}_2) = \frac{\langle i_1 i_2^* \rangle}{\sqrt{\langle i_1 i_1^* \rangle \langle i_2 i_2^* \rangle}} = \frac{\langle \bar{w}_1 [\Omega] \bar{w}_2^+ \rangle}{\sqrt{\langle \bar{w}_1 [T] \bar{w}_1^+ \rangle \langle \bar{w}_2 [T] \bar{w}_2^+ \rangle}}$$

After tedious algebra, it can be demonstrated that the maximum possible coherence value γ_{opt1} that can be obtained by varying the polarization is given by the square root of the maximum eigenvalue. Each eigenvalue is related to a pair of eigenvectors (w_{1i}, w_{2i}) one for each image. The first vector pair (w_{11}, w_{21}) represents the optimum polarizations. The second and third pairs (w_{12}, w_{22}) and (w_{13}, w_{23}) , belonging to the second and third highest singular values, represent optimum solutions in different polarimetric subspaces.

The three optimum complex coherences can be obtained directly by using the estimated eigenvalues:

$$\tilde{\gamma}_{opti}(\bar{w}_{opt1i}, \bar{w}_{opt2i}) = \sqrt{v_{opti}} \exp(i \arg(i_{opt1i} i_{opt2i}^*)) = \sqrt{v_{opti}} \exp(i \arg(\bar{w}_{opt1i} [\Omega] \bar{w}_{opt2i}^+))$$





2.4.5 Coherence Optimization

SARscape® - Polarimetry and Polarimetric-Interferometry SAR Module

The screenshot shows the ENVI 4.3 SARscape interface. The main window is titled "ENVI 4.3" and has a menu bar with "File", "Basic Tools", "Classification", "Transform", "Filter", "Spectral", "Map", "Vector", "Topographic", "Radar", "SARscape", "Window", and "Help". The "SARscape" menu is open, showing options like "Basic", "Tools", "Focusing", "Gamma and Gaussian Filtering", "Interferometry", "ScanSAR Interferometry", "Polarimetry and PolInSAR", "Execute Batch", "SARscape Cursor / Location", "View Log file", "View Trace file", "View SARscape Header file", and "About SARscape". The "Polarimetry and PolInSAR" sub-menu is also open, showing "Polarimetry" and "Polarimetric Interferometry". The "Polarimetric Interferometry" sub-menu is further open, showing "SLC coregistration", "Interferogram Generation", "Polarimetric Coherence", "Coherence Optimization" (highlighted), and "HELP Polarimetric Interferometry".

The "Polarimetric Coherence optimization" dialog box is open, showing the following fields and controls:

- Master HH, Master HV, Master VH, Master VV (input fields)
- Slave HH, Slave HV, Slave VH, Slave VV (input fields)
- Synthetic interf. (input field)
- Output Root Name (input field)
- WINDOW TYPE: Low Pass, Adaptive
- WINDOW SIZE: Azimuth filter window (15), Range filter window (5)
- Azimuth looks (1), Range looks (1)
- Buttons: Start, Looks, Store Batch, Cancel, Help



3. What are Appropriate Land Applications? Some Examples

- ▶ 3.1 Agriculture monitoring
- ▶ 3.2 Aquaculture mapping
- ▶ 3.3 Digital Elevation Model
- ▶ 3.4 Flood mapping
- ▶ 3.5 Forest mapping
- ▶ 3.6 Geomorphology
- ▶ 3.7 Monitoring of Land Subsidence
- ▶ 3.8 Subsidence Monitoring of Building Sinking
- ▶ 3.9 Rice mapping
- ▶ 3.10 Snow mapping
- ▶ 3.11 Urban mapping
- ▶ 3.12 Wetlands mapping



3.1 Agriculture Monitoring

3.1.1 Purpose

Reliable and objective information on cropped areas are important to farmers, local and national agencies responsible for crop subsidies and food security, as well as for traders and re-insurers. In the past years it has been shown that SAR based products can provide information on field processing conditions like ploughing, field preparation etc. and on crop growth status such as planting, emerging, flowering, plant maturity, harvest time, and frost conditions. These products - complemented with optical based products (such as chlorophyll, leaf area index, salinity, vegetation indexes, etc.) - offer a suite of information which will allow better management of the cropped areas as well as of the environment.

3.1.2 Method

The basic idea behind the generation of useful information for agriculture using SAR techniques is the analysis of changes in the acquired data over time. Measurements of temporal changes in reflectivity relate in primis

- i) to transitions in surface roughness, which are indicative of soil tillage, and, while crop-specific, useful in further specification of crop classes, and later
- ii) to the phenological crop's status.






3.1 Agriculture Monitoring

3.1.3 Example

The SAR based products illustrated below show the different crop growth moments during a crop season in South Africa. Different colours represent different growing stages at different dates at field level.

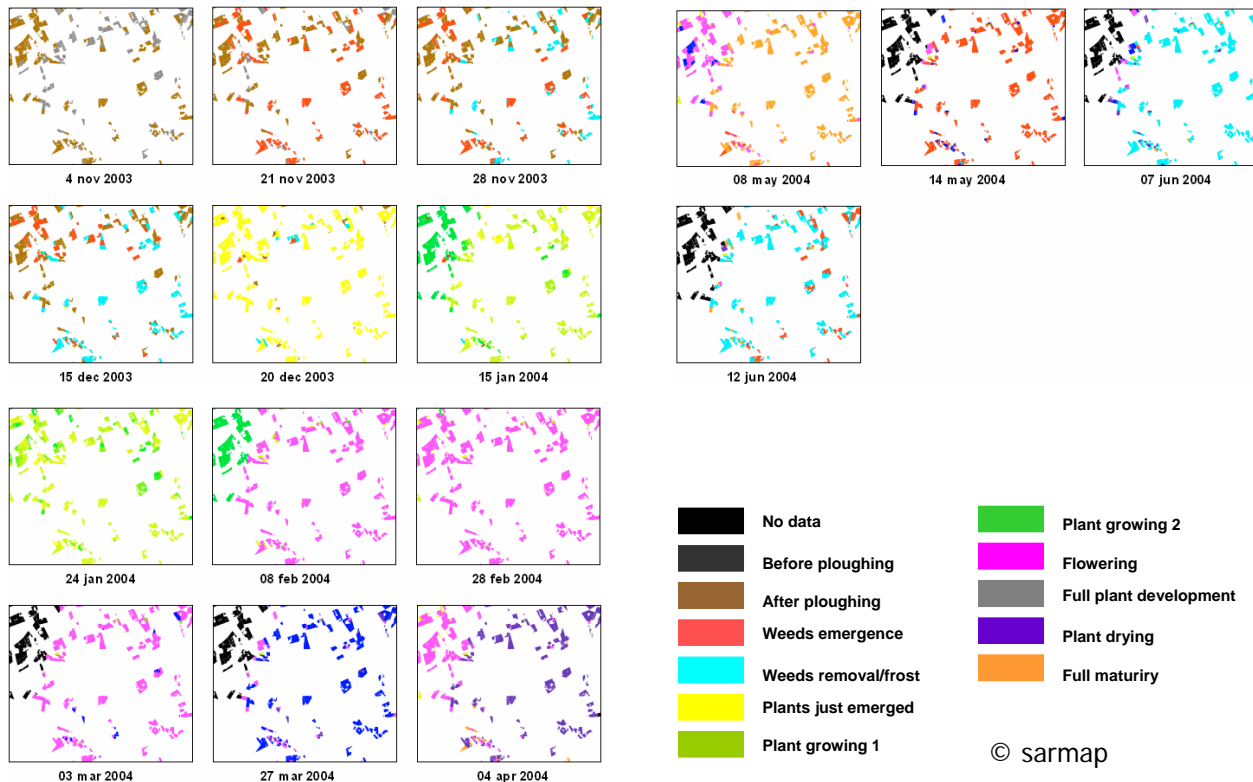



3.2 Aquaculture Mapping

3.2.1 Purpose

Inventory and monitoring of shrimp farms are essential tools for decision-making on aquaculture development, including regulatory laws, environmental protection and revenue collection. In the context of government aquaculture development policy, much attention is focused on the identification and monitoring of the expansion of shrimp farms. Therefore, the availability of an accurate, fast and mainly objective methodology that also allows the observation of remote areas assumes a great value.

3.2.2 Method

The identification of shrimp farms on SAR images is based on several elements:

- i) the radar backscatter received from the water surface of the ponds and from their surrounding dykes,
- ii) the shape of the individual ponds, and
- iii) the pattern of groups of ponds and the relative direction of the dykes vis-à-vis the incoming radar beam.

The location of shrimp farms is also typical, thus the analysis of their position and of the former land use of the area is necessary to verify the identification.





3.2 Aquaculture Mapping

3.2.2 Method

Based on this principle, FAO has developed a methodology, which considers the following processing steps:

- Pre-processing : Speckle filtering and geocoding
- Water classification : Histogram thresholding
- Boundary detection : Edge detection
- Proximity analysis : The occurrence of highly reflective surfaces around water surfaces is an indication of the presence of shrimp farms. The proximity analysis examines the boundaries of water bodies obtained from the classification, up to a user-specified distance, to locate both highly reflective surfaces in the classified image and edges in the Sobel filtered images. The proximity analysis produces two "summary images" that synthesise the shrimp ponds-related information contained in an ERS SAR image. The summary images allow the operator to locate the areas where there is a greater evidence of the occurrence of shrimp farms, and help in tracing the farms' boundaries.






3.2 Aquaculture Mapping

3.2.3 Example

The methodology is applied to ERS-2 SAR data acquired in 1996, 1998 and 1999 in an area of Sri Lanka. The map, illustrated below, shows three classes: Water bodies (blue), Shrimp farms occurring up to 18 April 1996 (red), and Expansion of shrimp farms up to 16 October 1998 (pink).

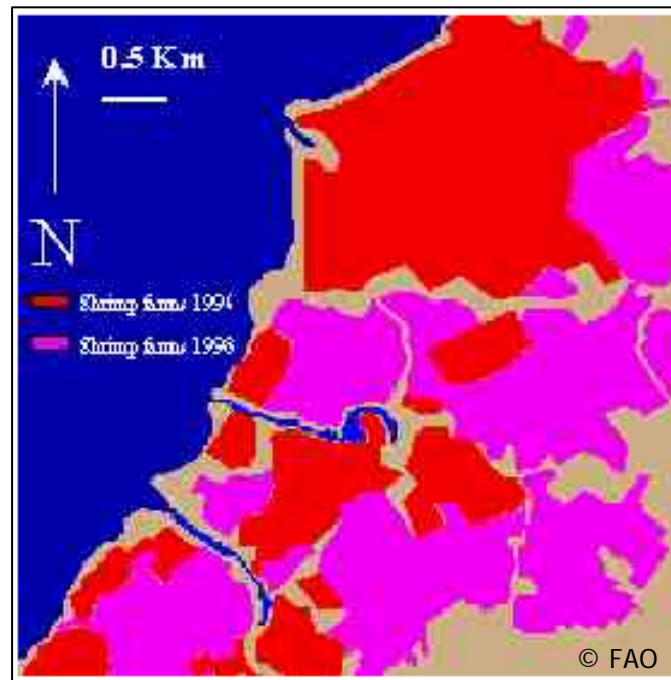



3.3 Digital Elevation Model Generation

3.3.1 Purpose

The Digital Elevation Model product represents a reconstruction of the height of the surface of a selected region. Such surfaces may also be of urban and forested areas, where the tops of buildings or trees are represented, respectively. The product is generated over a regular grid of equidistant points, where the corresponding height is a measure of the average height within the cell. Taking advantage of interferometric techniques it is possible to generate high quality DEM in a semi-automated fashion.

3.3.2 Method

The basic idea for the generation of DEM products is the conversion of interferometric phase information, derived from two SAR acquisitions at different dates from slightly different orbital positions, into heights. In order to obtain accurate products, the SAR data must go through a dedicated processing chain, which carries out data focussing, interferometric processing, geo-referencing and finally mosaicing. For a complete description of the methodology refer to the InSAR Section.





3.3 Digital Elevation Model Generation

3.3.3 Product's Accuracy

The achievable resolution with ERS-Tandem data is up to 25 m on the horizontal plane (x-y), while the achievable height accuracy can be summarized as follows:

5-8 metres in flat-moderate rolling areas where high temporal correlation is available (dry areas, sparse vegetation or winter conditions).

10-15 metres in steep topography areas where high temporal correlation is available.

Worst accuracy in areas where low temporal correlation is available (large forested or water areas), where the DEM may be reconstructed by interpolation.






3.3 Digital Elevation Model Generation

3.3.4 Example

This DEM of Switzerland covers an area of approximately 41.000 km² with heights ranging from 200 m to 4.650 m. This product has been generated using 70 ERS scenes, namely 22 descending pairs and 13 ascending pairs. The DEM, which is projected in the Swiss cartographic system (Oblique Mercator), has a grid size of 25 metres.

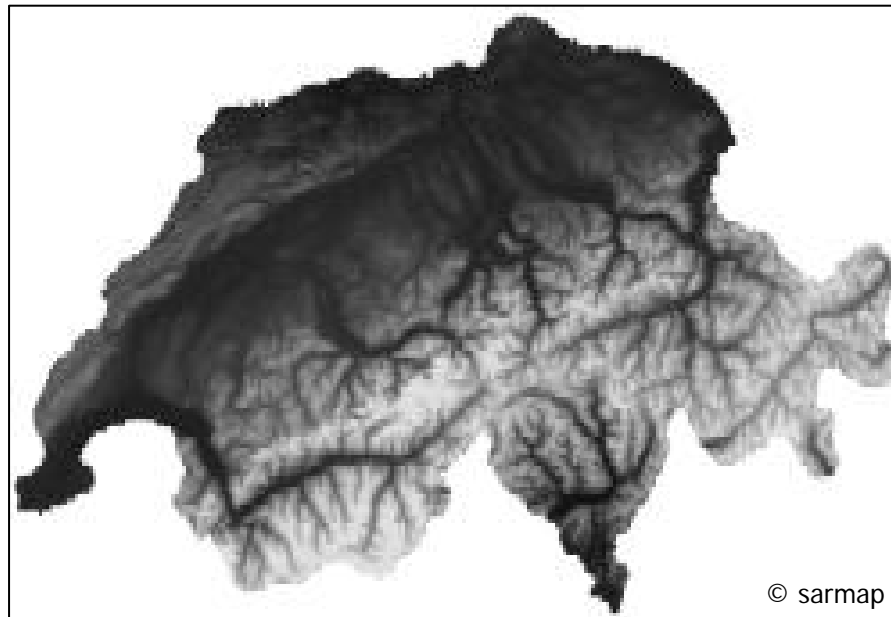



3.4 Flood Mapping

3.4.1 Purpose

Flooding is a major hydrological hazard which occurs relatively frequently. During the last decade floods have affected approximately 1.5 billion people - more than 75% of the total number of people reported as affected by natural disasters world-wide. Around the world there are on average about 150 serious floods per year, with significant rises in water level ranging from severely overflowing streams, lakes or reservoirs to major ocean-driven disasters in exposed coastal regions. Like droughts, floods are catastrophic events that to some extent follow a natural cycle that is often predictable. Timely information about flood phenomena that may provide strong indicators of a forthcoming disaster can often help to track and identify the areas that will be affected most severely.

3.4.2 Method

The SAR can easily detect water-covered areas, characterised by a much lower intensity than any other feature in the surroundings. The main limitations are induced by the presence of nearby vegetation cover or the presence of wind, but change detection techniques using SAR acquisitions from different dates (in the normal conditions and during the flood), prove to be a robust way to overcome these difficulties.






3.4 Flood Mapping

3.4.3 Example

The map shown on the right is based on the ratioing of two pairs of ENVISAT ASAR Wide Swath scenes (e.g. 25 July 2004 and 23 March 2003) covering the whole of Bangladesh, and combining this with information relevant to the terrain height (e.g. a Digital Elevation Model) during the classification step. The map shows flooded areas (blue and cyan), permanent water (black), and urban areas (red).

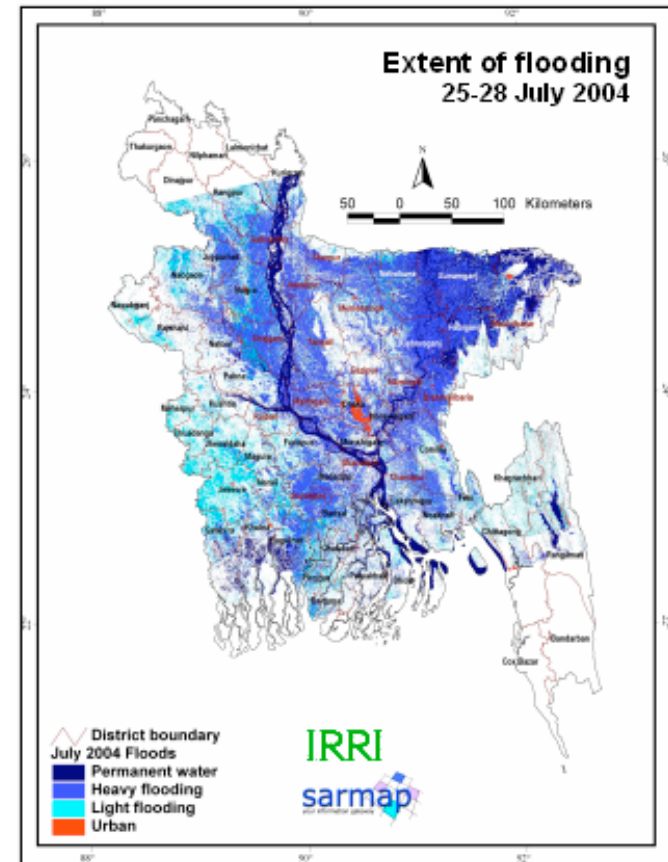




3.4 Flood Mapping

3.4.3 Example

Based on a single ENVISAT ASAR Alternating Polarization (HH/HV) scene acquired on August 2003, a map indicating the river (blue) and other land cover types (such as Agriculture, Forestry, and Urban) has been produced for the area of Dresden, Germany, during a flood event. It is worth mentioning that in this case the actual extent of the flooded area can not be estimated. However, this product can be integrated with already existing GIS information, thus making it possible to derive the extent of water covered areas.

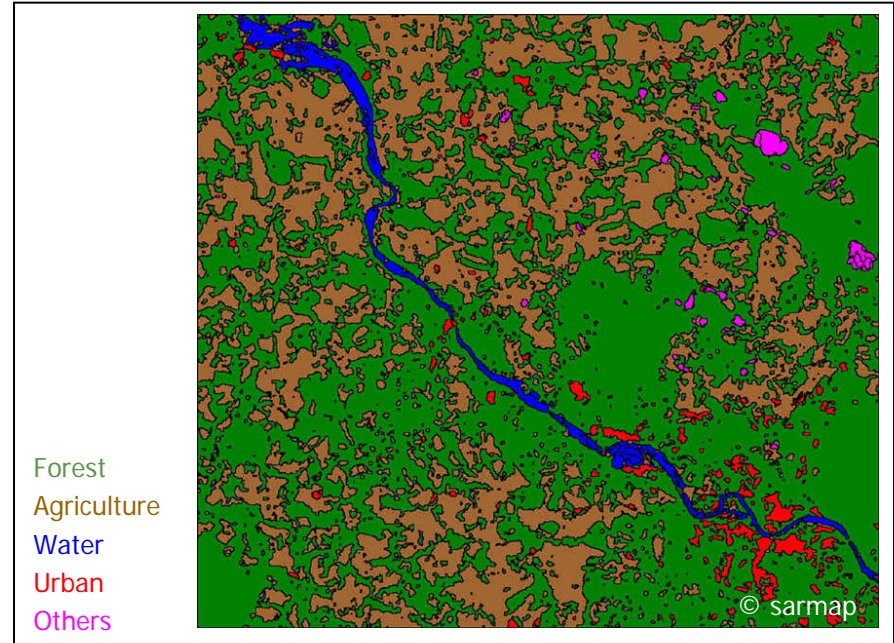



3.5 Forest Mapping

3.5.1 Purpose

Earth Observation has demonstrated that it can offer useful information for forestry applications, especially in cases of major forest change such as that caused by severe storms or fires. Using low spatial resolution optical imagery from sensors such as NOAA AVHRR, ERS ATSR-1/2, ENVISAT AATSR and SPOT-VEGETATION, active fire maps are generated for large regions and even the whole globe. Given their low spatial resolution (approximately 1 km), these sensors are not suitable for deriving burn scars. The most popular sensors to date for responding to such needs are the Enhanced Thematic Mapper (ETM+), the Thematic Mapper (TM) – both on board of the Landsat satellites – and SPOT-4/5 High Resolution instruments. With spatial resolutions ranging from 30 to 5 meters, such imagery can provide accurate estimates of the burnt area, as it is relatively easy to discriminate burned from non-burned areas, at least in certain vegetation types. However, these instruments have a major drawback in that it can be difficult to get imagery in areas with long periods of significant cloud cover. This applies in particular to tropical and boreal regions. In these situations, the possibility of exploiting high spatial resolution (10 to 25 meters) SAR data provides great advantages over optical sensors, because data acquired from active microwave systems are not affected by water vapour, smoke or clouds.





3.5 Forest Mapping

3.5.2 Method

The basic methodology for using SAR data to detect forest burn scars relies on change detection, comparing data acquired after a fire with reference data obtained beforehand. With this objective, applications relying on SAR data traditionally based on amplitude images may be fruitfully extended by exploiting interferometric techniques. A benefit of repeat-pass SAR interferometry is the feasibility of exploiting coherence information as well as the usual backscattering coefficient information and backscattering coefficient variation between the two acquisition times.

Change detection based on amplitude images may be implemented by using ratioing. This multi-temporal change approach, which tracks changes in SAR backscatter over time using multiple images, makes it possible to distinguish different land-cover types and changes in these, based on their unique temporal signatures. One drawback of this method is that multiple acquisitions are required, and that they must be available at key points in the phenological cycle of the different land-cover types. More importantly, for mapping changes after a disaster event, images must be available soon afterwards (maximum 1-2 months), in order to maximise the information retrieved from the imagery. Coherence information can add supporting evidence to this approach, and may also give additional information suitable to produce a reference forest-non forest map and to help the subsequent classification.






3.5 Forest Mapping

3.5.3 Example

The figure below shows a colour composite image from part of Saskatchewan, Canada. Water bodies are shown in dark green and dark blue. To the left is an area that burnt during the summer of 1995, clearly visible in cyan. To the right the blue-green area is an area that burnt prior to 1995. In the graphic on the right, normalised SAR values are shown for a forest area and an area that burned in summer 1995. There is an increase of over 6 dB in the backscatter values of the burned area with respect to forest in the October image. Although this falls again by January, it remains almost 3 dB above the backscatter of unburned forest detected.

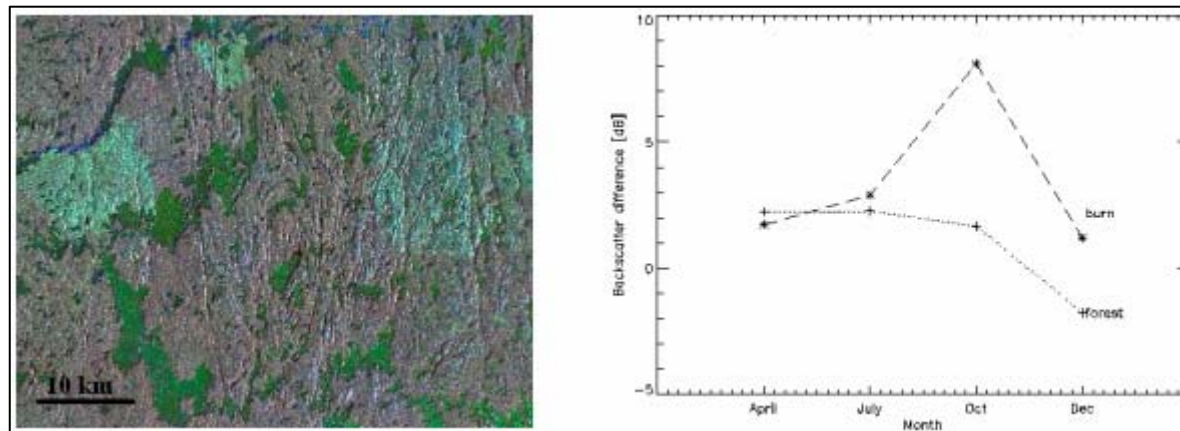




3.5 Forest Mapping

3.5.3 Example

Results of the semi-automatic burnt area detection are shown in the figure below. Burnt areas have been mapped as those which burned in 1995 and those which burned in previous years. Burnt area polygons provided by the Canadian Forest Service are overlaid.

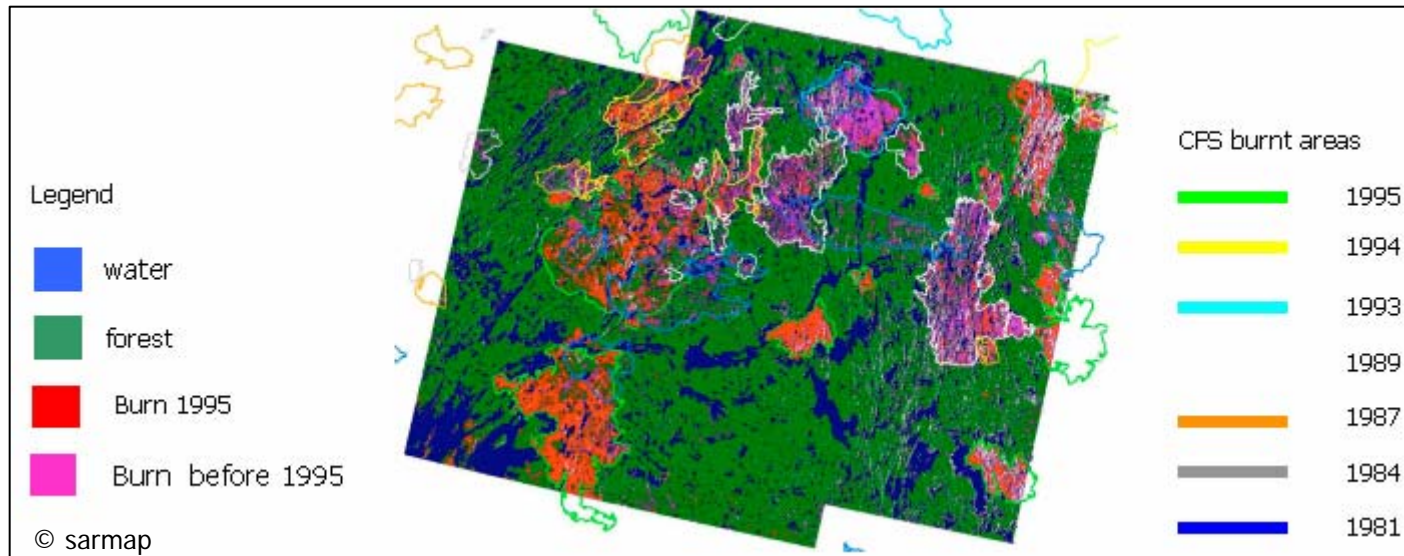



3.6 Geomorphology

3.6.1 Purpose

Earth Observation data are particularly appropriate for mapping morphological features such as morpholineaments, which are important factors determining geomorphological structures and geologically active areas. Due to the monostatic acquisition mode of radar systems, SAR images in particular are well suited for morpholineament mapping.

3.6.2 Method

The combination of orthorectified optical (multi-spectral) and terrain geocoded SAR images is a simple and suitable methodology to identify morpholineaments, uplift/subsidence evidence, drainage patterns, active fault systems, ductile structures, etc. A common way to generate such a product is based on the transformation of a multispectral image (e.g. Landsat TM), which is in the Red Green Blue (RGB) system, into an Intensity, Hue, and Saturation (IHS) system. Subsequently the SAR image, whose information is primarily represented by its texture, replaces the Intensity channel before re-transforming into the RGB colour system.






3.6 Geomorphology

3.6.3 Example

The figure below shows an ERS-1 (left) and corresponding Thematic Mapper (centre) image of an arid area in Sudan. On the right part the SAR and multi-spectral data have been merged by means of a colour transform (RGB to IHS). This example highlights how optical-radar data fusion can significantly enhance the information content for morphological and geological mapping.

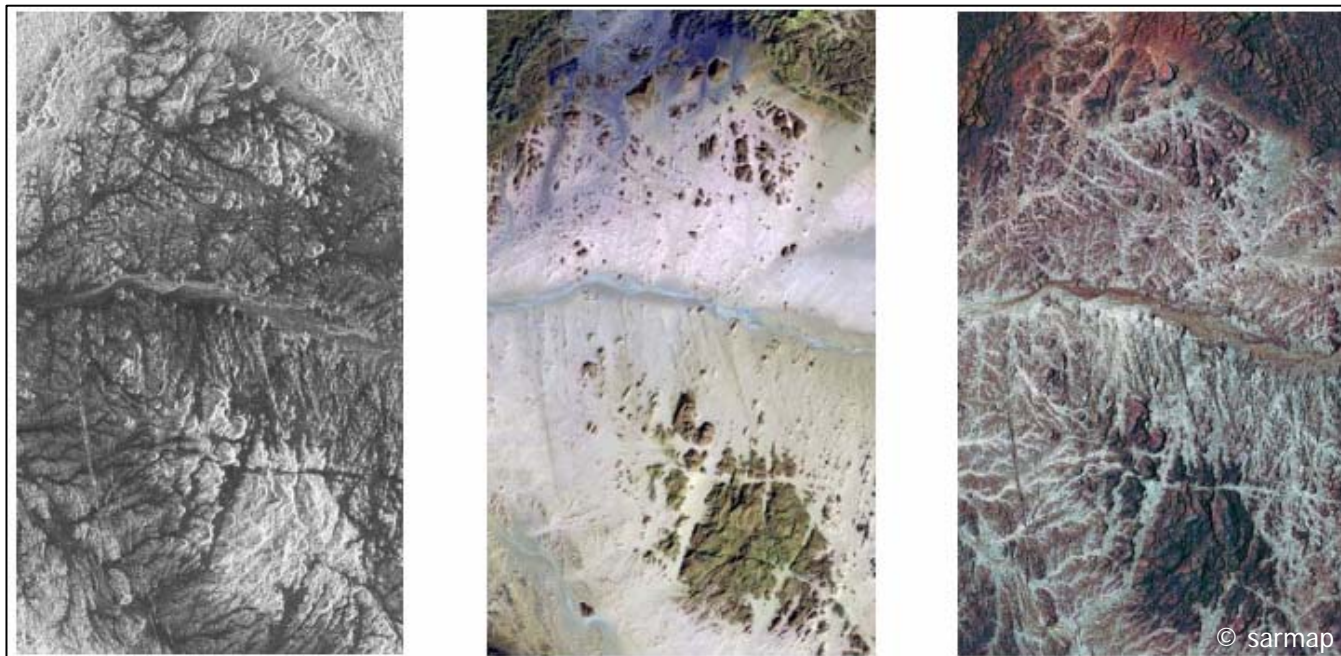



3.7 Monitoring of Land Subsidence

3.7.1 Purpose

Ground subsidence is a phenomenon caused by natural or man-induced compaction of unconsolidated sediments. Its effect is a sinking of the ground surface. In many cases this is a consequence of the extraction of ground water, geothermal fluids, coal, gold and other general mining activity. Due to the rapidly increasing use of underground natural resources such as water, oil and gas, most of the major subsidence areas around the world have developed at accelerated rates in the past years. Two traditional methods for detecting this are based on direct measurements, such as levelling and GPS techniques. However, there are two important problems in the use of these approaches:

- i) the cost of the instrumentation, and
- ii) the difficulty to extrapolate point measures over wide areas.

3.7.2 Method

The basic idea for the generation of land subsidence products is the conversion of differential interferometric phase information, derived from three or more SAR acquisitions at different dates from slightly different orbital positions, into displacements (so-called conventional DInSAR technique) as presented in the DInSAR Section.






3.7 Monitoring of Land Subsidence

3.7.3 Example

The figure shows a land subsidence map from an area of Algeria, which has been produced using ERS-1 and 2 SAR data acquired in the period 1992-2000. In this case the land subsidence is due to significant water extraction activities. What is visible in the figure below, is a general subsidence trend that crosses the centre of the image in the NW-SE direction. It is worth noting that the most of the wells (blue crosses) are distributed over this subsiding area.

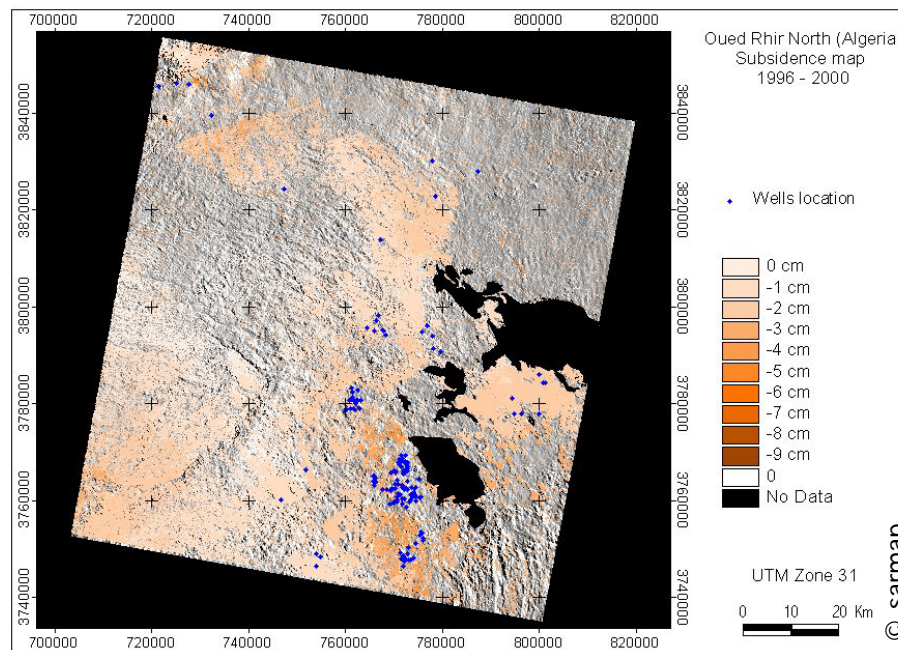



3.8 Monitoring of Building Sinking

3.8.1 Purpose

As for land subsidence.

3.8.2 Method

The Permanent Scatterer (PS) method (PSInSAR™), developed by Politecnico di Milano (POLIMI) and TRE (a POLIMI spin-off), is a new approach introduced to improve the ability to determine mm-scale displacements of individual features on the ground. It uses all data collected by a SAR system over the target area. As long as a significant number and density of independent radar-bright and radar-phase stable points (i.e. permanent scatterers) exist within a radar scene and enough radar acquisitions have been collected, displacement time series and range-change rates can be calculated.

Using the PS method, surface motions can be resolved at a level of ~ 0.5 mm/yr. This resolves very small-scale features, including motions of individual targets/structures (e.g. a bridge or a dam), not previously recognised in conventional DInSAR. PS usually correspond to buildings, metallic objects, outcrops, exposed rocks, etc. exhibiting a 'radar signature' that is constant with time. Once these 'radar benchmarks' have been identified from a time series of data, very accurate displacement histories can be obtained for the period 1992 to the present. The effect is akin to suddenly having a dense GPS network retrospectively available for the last ten years in any moderately urbanised area (at least areas where ERS SAR data have been collected).






3.8 Monitoring of Building Sinking

3.8.3 Example

The figure on the right shows the average deformation velocity of radar benchmarks (PS) identified in an area of Paris (France) by using ERS-1/2 SAR data from 1992 to 2003. Displacements are measured along the direction of the sensor target conjunction.

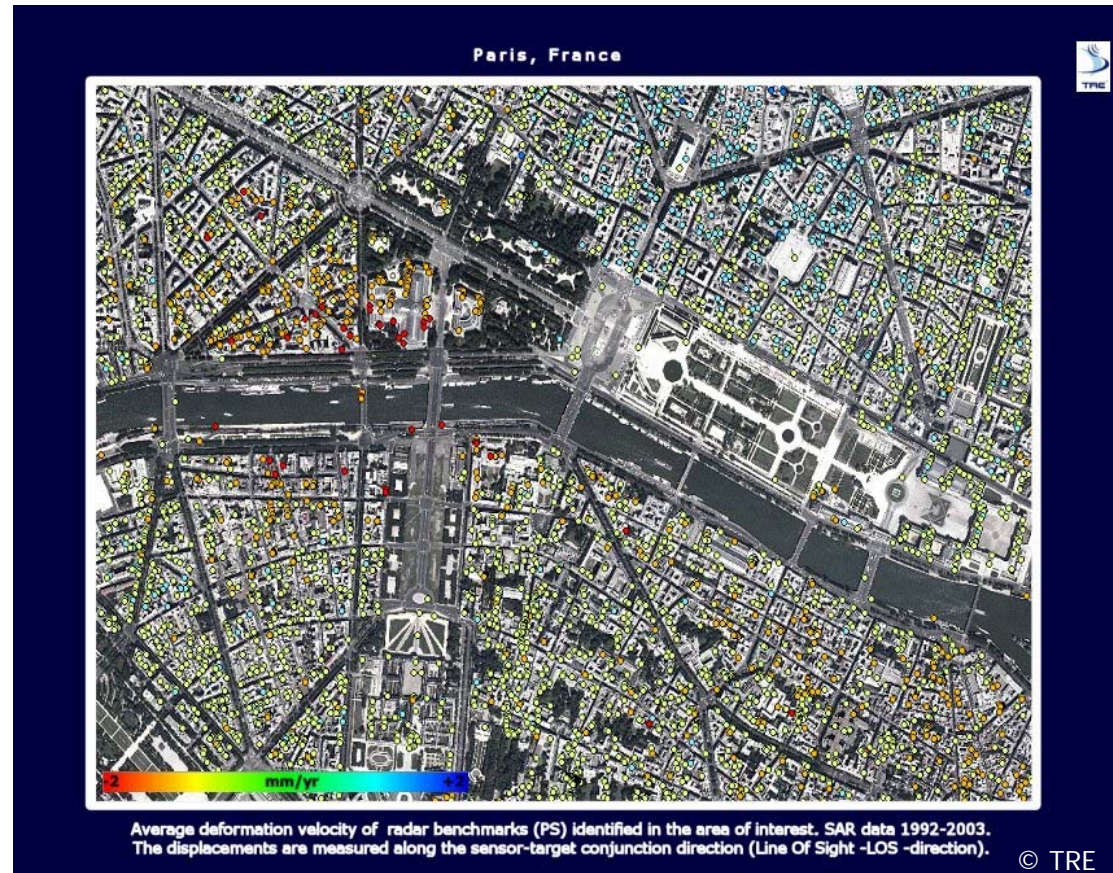



3.9 Rice Mapping

3.9.1 Purpose

Rice is the most important food crop in developing countries, which still produce 1.6 times as much rice as wheat, the second most important staple. Recent projections made by the International Food Policy Research Institute show that the demand for rice will increase by about 1.8% per year over the 1990-2020 period. This means that over the period of the next 30 years, rice consumption will increase by nearly 70%, and Asian rice production must increase to about 840 million tons by the year 2025, from the present level of about 490 million tons, if rice prices are to be maintained at current levels.

3.9.2 Method

The basic idea behind the generation of rice acreage statistics using SAR techniques is the analysis of changes in the acquired data over time. Measurement of temporal changes of SAR response leads to the identification of the areas subject to transplanting / emergence moment, since an increase in the SAR backscatter corresponds to a growth in the rice plants.






3.9 Rice Mapping

3.9.3 Example

Based on multi-temporal ENVISAT ASAR and RADARSAT-1 data, a rice map, indicating the rice emergence moments has been generated for an area in the Philippines. The rice acreage statistics are stored in map format showing the rice extent (right) and, in form of numerical tables (left), quantifying the dimension of the area cultivated by rice at the smallest administrative level - typically village unit.

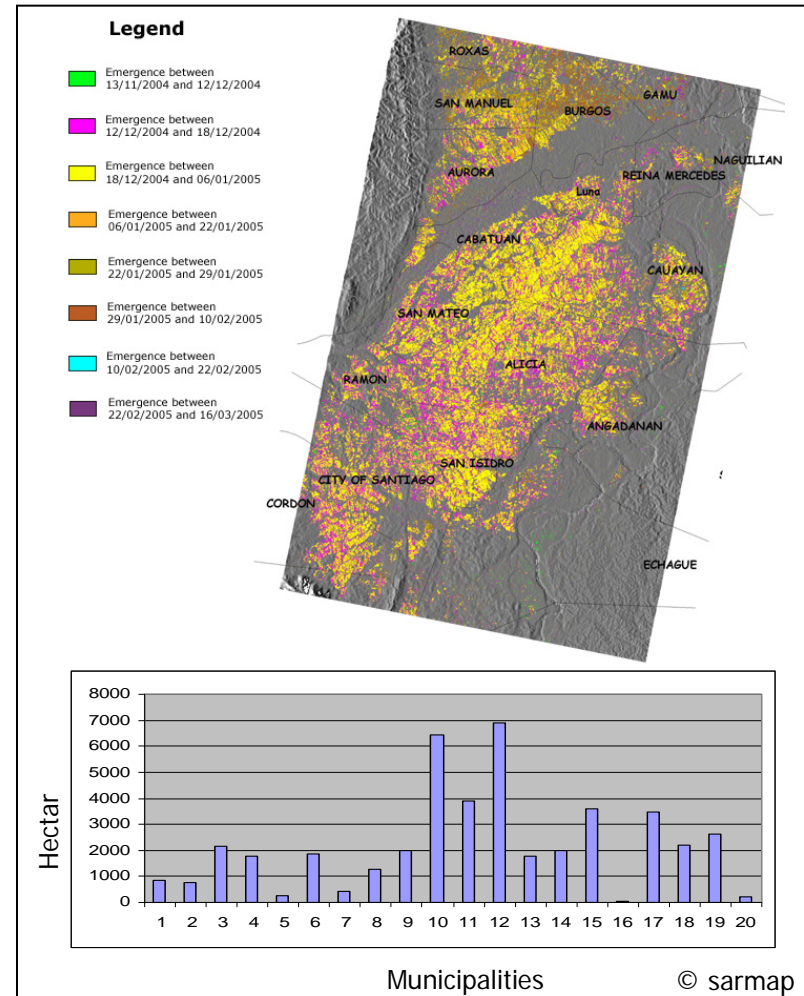



3.10 Snow Mapping

3.10.1 Purpose

The extent of snow covered area is a key parameter for predicting snowmelt runoff. Because SAR sensors provide repeat pass observations irrespective of cloud cover, they are of interest for operational snowmelt runoff modelling and forecasting.

3.10.2 Method

The methodology for mapping melting snow, developed by the University of Innsbruck, is based on repeat pass images in the C-band SAR and applies change detection to eliminate the topographic effects of backscattering. At C-band dry snow is transparent and backscattering from the rough surfaces below the packed snow dominates. This is the reason why the return signals from dry snow and snow-free areas are very similar. When the snow becomes wet, backscattering decreases significantly. Wet snow can therefore be distinguished from dry snow or snow-free conditions using analysis of temporal backscatter changes.






3.10 Snow Mapping

3.10.3 Example

The figure on the right shows a snow map on 12 May 1997 (blue and green) and 16 June 1997 (green only), based on ERS-2 SAR images of ascending and descending passes. In areas of residual layover (magenta) no information can be extracted. The boundaries of the Schlegeis basin (Austria) are shown in yellow. On the lower right the fraction of residual layover is high because it is covered only by the descending image. The snow area decreased from 97 km² on 12 May to 61 km² on 16 June.

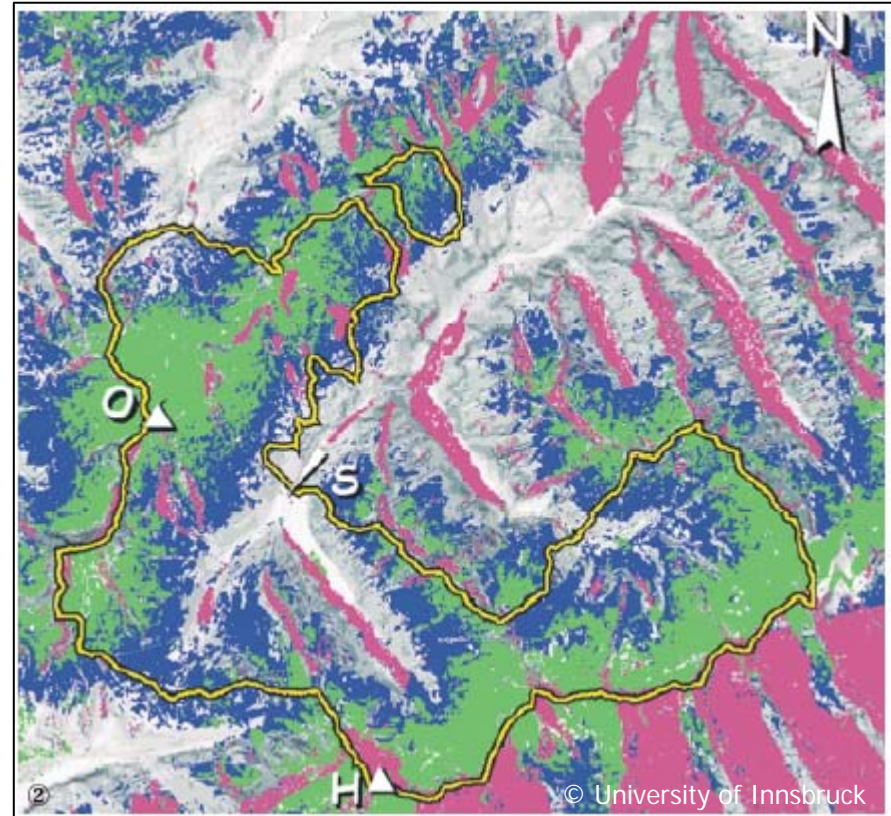



3.11 Urban Mapping

3.11.1 Purpose

Geo-information is by definition spatially related and therefore reliant on mapping. Some sort of base map is the foundation upon which every Geographic Information System (GIS) or geo-spatial service is built. Hence, cartography can be seen as a horizontal element of the geo-information service industry, supplying an input to every processing and application-based chain and for a broad range of thematic applications. Cartographic production chains that exploit both SAR and optical data exist and operate in both the civilian and security sectors.

3.11.2 Method

Urban areas are difficult to analyse, primarily due to the many different land cover types (e.g. streets, buildings, parks, etc.), each of which have their own shape, geometry and dimension characteristics. The methodology developed by the University of Pavia, which makes it possible to identify different classes depending upon building density, uses a texture analysis approach (i.e. a technique that take into account of the spatial relationship between neighbouring pixels). The extracted features are finally classified using supervised non-parametric classifiers, such as the Fuzzy Artmap.






3.11 Urban Mapping

3.11.3 Example

The figure below illustrates an ERS-1 SAR scene of the Pavia (Italy) acquired on August 13th 1992 and the resulting map.

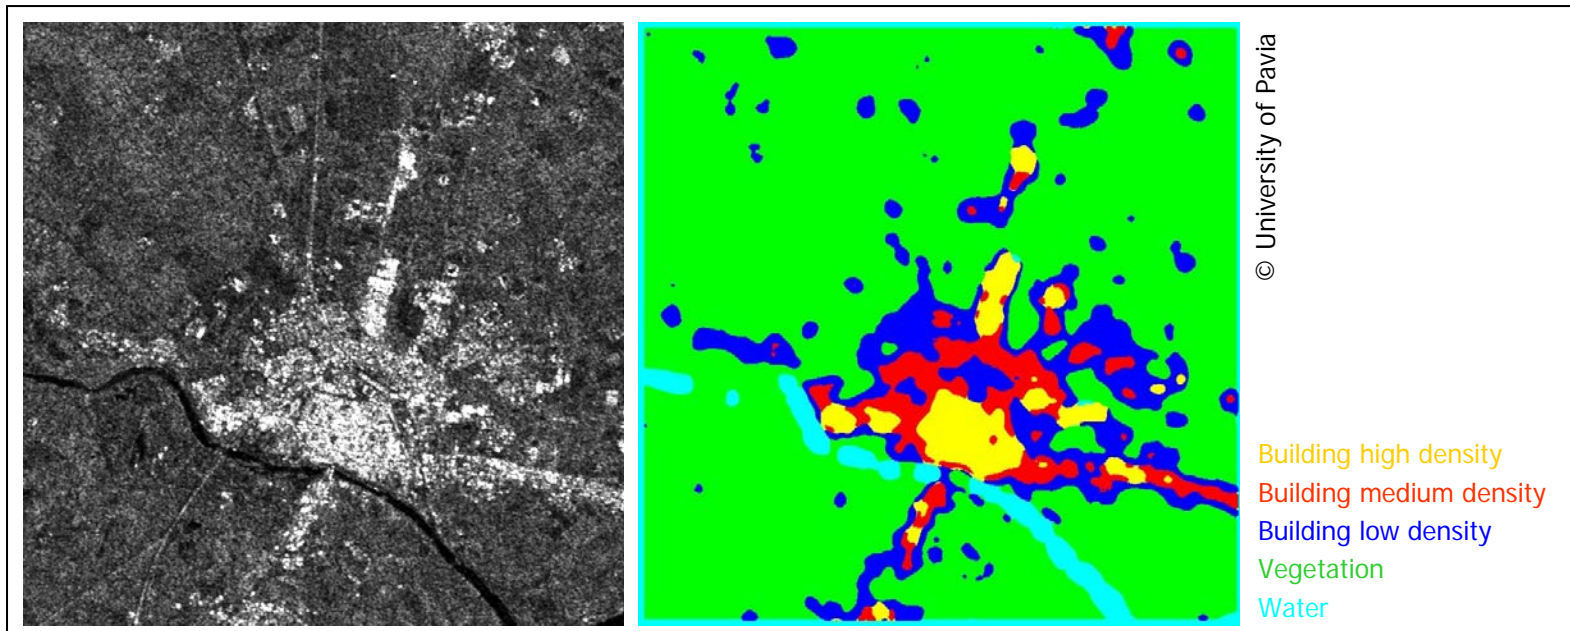



3.12 Wetlands Mapping

3.12.1 Purpose

Wetlands are areas where water is the primary factor controlling the environment and the associated plant and animal life. They occur where the water table is at or near the surface of the land, or where the land is covered by shallow water. Half of the world's wetlands are estimated to have been lost during the 20th century, as land was converted to agricultural and urban areas, or filled to combat diseases such as malaria. The Ramsar Convention provides the framework for international co-operation for the conservation of wetlands. It obliges its parties to designate wetlands of international importance for inclusion in a list of so-called Ramsar sites and to wisely manage the wetlands in their territories.

3.12.2 Method

The primary utilisation of SAR data is in the identification and mapping of open water and flooded vegetation. This information is often used to complement land use/cover analysis (based on optical images), but may also be utilized as a stand alone product. This so-called Water Cycle Regime Product indicates the extent of water at dry and wet periods of the year, and is generated by classifying multi-temporal SAR data.






3.12 Wetlands Mapping

3.12.3 Example

Multi-temporal RADARSAT-1 data acquired on August, September and November 2004 over the Littoral Audois (France) have been used to generate the Water Cycle Regime Product (figure right bottom). This product has been obtained by combining the three water / flooded vegetation maps (figures top right, top left, bottom left), which were produced by thresholding each image. The resulting product gives a clear indication of the water cycle during this period.

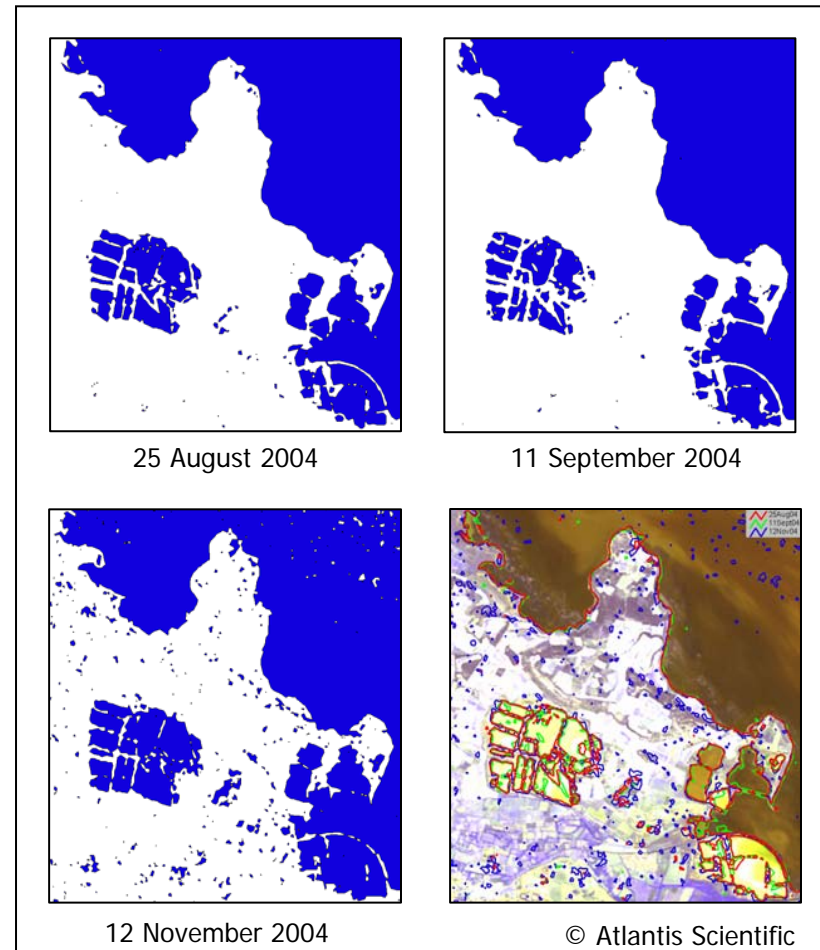


4. What are Operational and Future Spaceborne SAR Sensors?

- ▶ 4.1 ERS-1 and 2 SAR
- ▶ 4.2 JERS-1 SAR
- ▶ 4.3 RADARSAT-1
- ▶ 4.4 SRTM
- ▶ 4.5 ENVISAT ASAR
- ▶ 4.6 ALOS PALSAR
- ▶ 4.7 TerraSAR-X
- ▶ 4.8 RADARSAT-2
- ▶ 4.9 COSMO-SkyMed
- ▶ 4.10 RISAT-1
- ▶ 4.11 SENTINEL-1



4.1 ERS-1 and 2 SAR

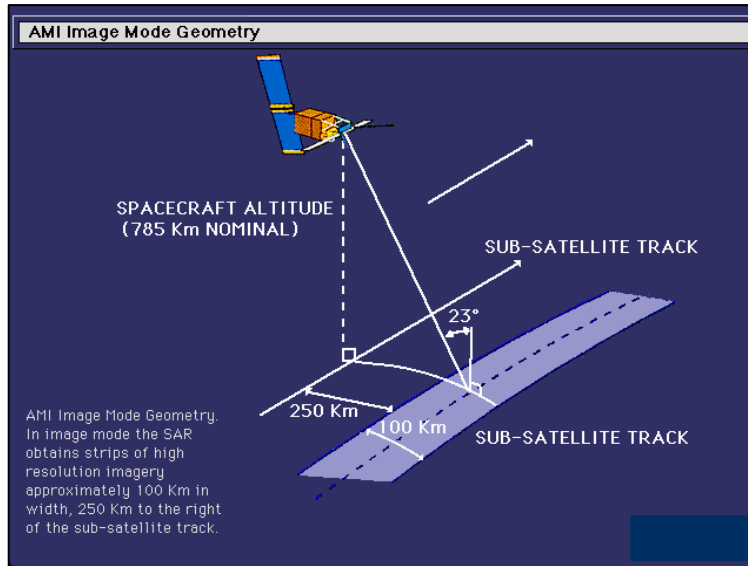

Note that the joint use of ERS (Earth Remote Sensing Satellite) -1 and ERS-2 SAR is called ERS-Tandem mode. In this particular case, ERS-1 and ERS-2 SAR data have been acquired time-shifted by 24 hours. For almost 5 years this atypical acquisition mode made it possible to collect repeat-pass interferometric (InSAR) data used mainly for the generation of Digital Elevation Model data.

| | |
|---------------------|---|
| Agency | European Space Agency |
| Frequency | C-band |
| Polarization | VV |
| Ground Resolution | 25 m |
| Acquisition Mode | Stripmap (Image) |
| Swath | 100 km |
| Repeat cycle | 35 days |
| Launched | 1991-2000 / 1995 |
| Further Information | http://www.esa.int |





4.2 JERS-1 SAR




| | |
|---------------------|---|
| Agency | Japan Aerospace Exploration Agency |
| Frequency | L-band |
| Polarization | HH |
| Ground Resolution | 20 m |
| Acquisition Mode | Stripmap (Image) |
| Swath | 70 km |
| Repeat cycle | 44 days |
| Launched | 1993-1998 |
| Further Information | http://www.eorc.jaxa.jp |





4.3 RADARSAT-1

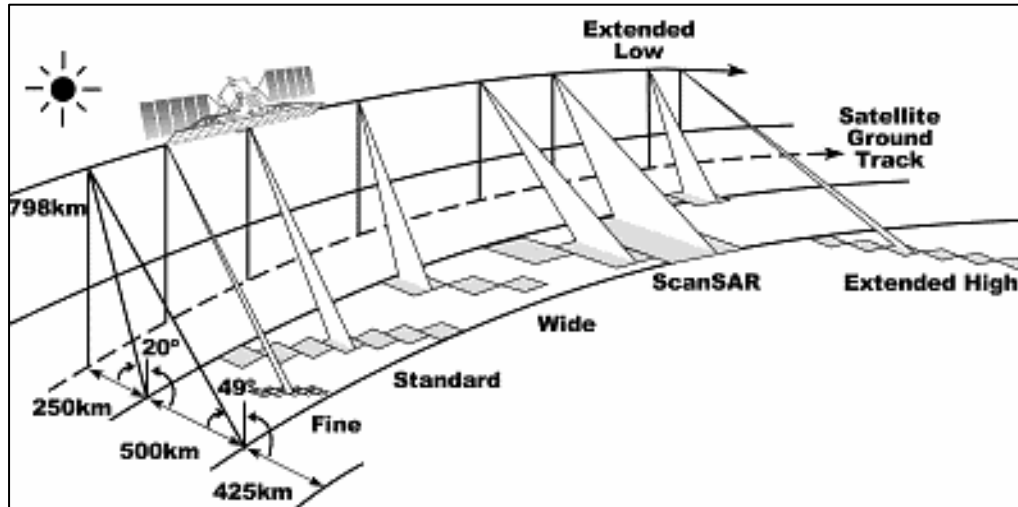

| | |
|---------------------|---|
| Agency | Canadian Space Agency |
| Frequency | C-band |
| Polarization | HH |
| Ground Resolution | 10 to 100 m |
| Acquisition Modes | Stripmap (Fine, Standard, Wide) and ScanSAR |
| Swath | 50 to 500 km |
| Repeat cycle | 24 days |
| Launched | 1995 |
| Further Information | http://www.rsi.ca |





4.3 RADARSAT-1

As indicated in the Table below, images acquired in different modes (Fine, Standard, Wide, etc.) can be delivered in different formats (Signal Data, Single Look Complex, Path Image, etc.). It is worth mentioning that the most appropriate format is (if available) Single Look Complex data. This is primarily because i) the data are in the original SAR geometry and ii) the data are untouched (in radiometrical terms), thus making it possible to perform the most suitable processing for the generation of the envisaged product.


| | Signal Data | Single Look Complex | Path Image | Path Image Plus | Map Image | Precision Map Image | Ortho-Image |
|--------------------------------|-------------|---------------------|------------|-----------------|-----------|---------------------|-------------|
| Fine | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Standard | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Wide | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ScanSAR Narrow | ✓ | N/A | ✓ | N/A | N/A | N/A | ✓ |
| ScanSAR Wide | ✓ | N/A | ✓ | N/A | N/A | N/A | ✓ |
| Extended High | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Extended Low | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Further information at http://www.rsi.ca/products/sensor/radarsat/cl_ra_bm.asp





4.4 SRTM

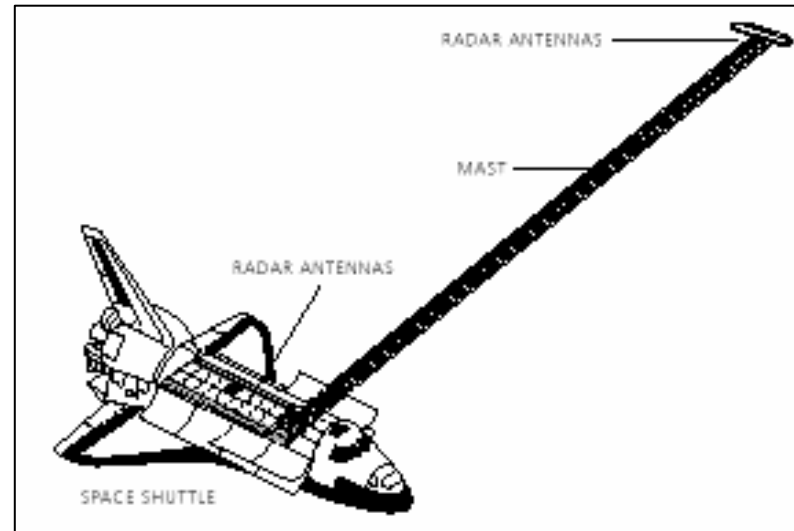


| | |
|---------------------|---|
| Agency | NASA/JPL & DARA/ASI |
| Frequency | X- and C-band |
| Polarization | VV |
| Ground Resolution | 20 to 30 m |
| Acquisition Modes | Stripmap |
| Swath | 30 to 350 km |
| Mission length | 11 days |
| Launch | 2000 |
| Further Information | http://srtm.usgs.gov |





4.4 SRTM

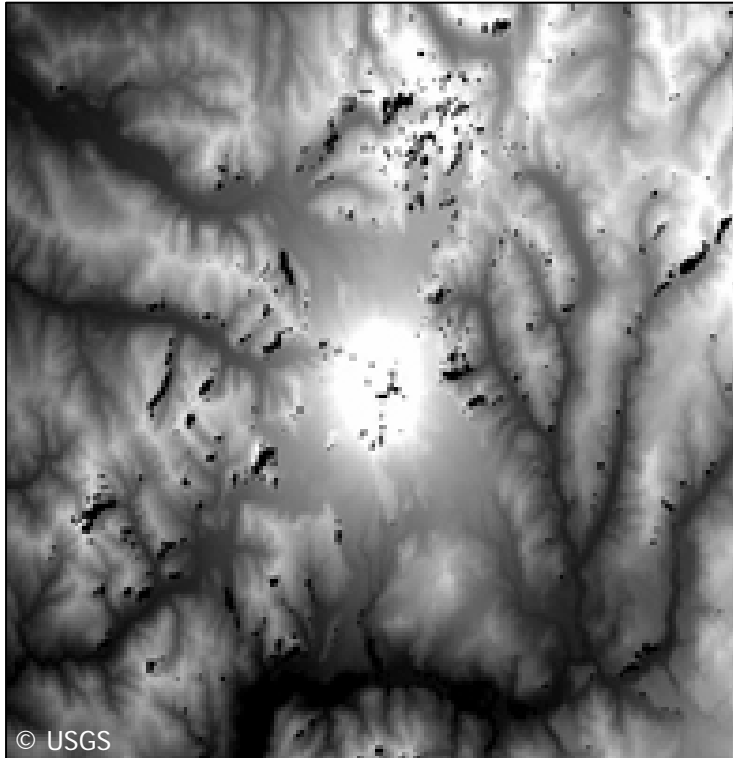

Mount St. Helens, USA


The Shuttle Radar Terrain Mission (SRTM) is a joint project between NASA and National Geospatial-Intelligence Agency to map the world in three dimensions. SRTM utilized dual Spaceborne Imaging Radar (SIR-C) and dual X-band Synthetic Aperture Radar (X-SAR) configured as a baseline interferometer. Flown aboard the NASA Space Shuttle Endeavour February 11-22, 2000, SRTM successfully collected data over 80% of the Earth's land surface, for most of the area between 60 degrees N and 56 degrees S latitude.

SRTM data are being processed at the Jet Propulsion Laboratory into research-quality digital elevation models (DEMs). The data are 3 X 3 averaged to 3-arc second spacing (90 metre) from the original 1-arc second data. The absolute horizontal and vertical accuracy is 20 metres (circular error at 90% confidence) and 16 metres (linear error at 90% confidence), respectively.





4.5 ENVISAT ASAR

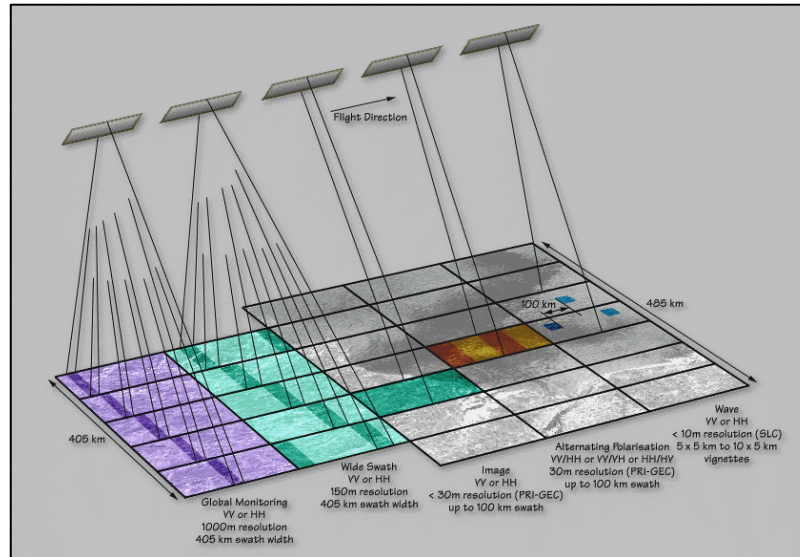

| | |
|---------------------|---|
| Agency | European Space Agency |
| Frequency | C-band |
| Polarization | HH or VV or HH/HV or VV/VH |
| Ground Resolution | 15 to 1000 m |
| Acquisition Modes | Stripmap (Image), AP, ScanSAR (Wide Swath, Globe) |
| Swath | 100 to 405 km |
| Repeat cycle | 35 days |
| Launch | 2001 |
| Further Information | http://www.esa.int |





4.5 ENVISAT ASAR

As indicated in the Table below, images acquired in different modes (Fine, Standard, Wide, etc.) can be delivered in different formats (Raw, Single Look Complex, Precision, etc.). It is worth mentioning that the most appropriate format is (if available) the Single Look Complex one, primarily because i) the data are in the original SAR geometry and ii) the data are untouched (in radiometrical terms), thus making it possible to perform the most suitable processing for the generation of the envisaged product.


| | Raw | SLC | Precision | Ellipsoidal Geocoded | Medium Resolution | Browse |
|---------------------------------|-----|-----|-----------|----------------------|-------------------|--------|
| Image | Yes | Yes | Yes | Yes | Yes | Yes |
| Alternating Polarization | Yes | Yes | Yes | Yes | Yes | Yes |
| Wide Swath | No | No | Yes | No | Yes | Yes |
| Global | No | No | Yes | No | No | Yes |

Further information <http://envisat.esa.int/dataproducts/asar/CNTR2-1.htm>





4.6 ALOS PALSAR

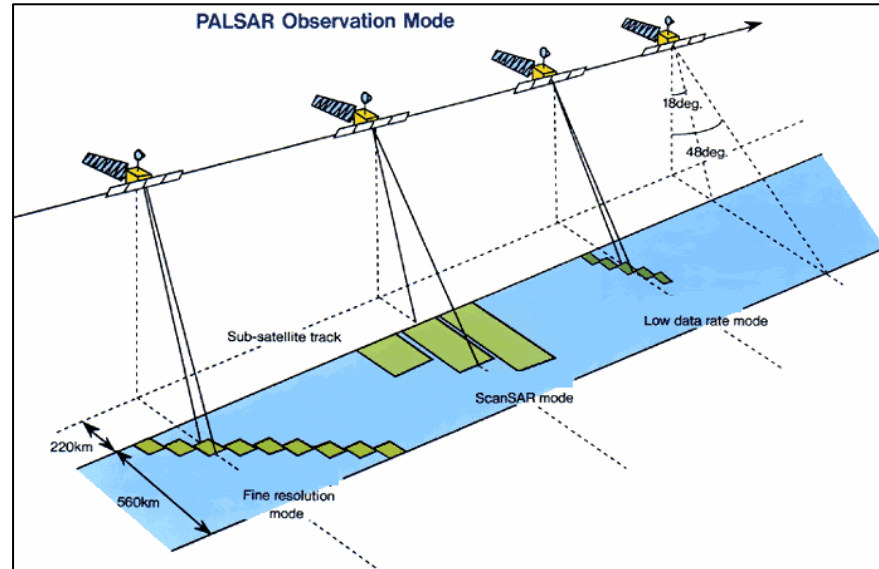


| | |
|---------------------|---|
| Agency | Japan Aerospace Exploration Agency |
| Frequency | L-band |
| Polarization | Single Pol, Dual Pol, Full Pol |
| Acquisition Modes | Stripmap (Fine) and ScanSAR |
| Ground Resolution | 7 to 100 m |
| Swath | 20 to 350 km |
| Repeat Cycle | 44 days |
| Launch | 2006 |
| Further Information | http://www.eorc.jaxa.jp |





4.7 TerraSAR-X-1

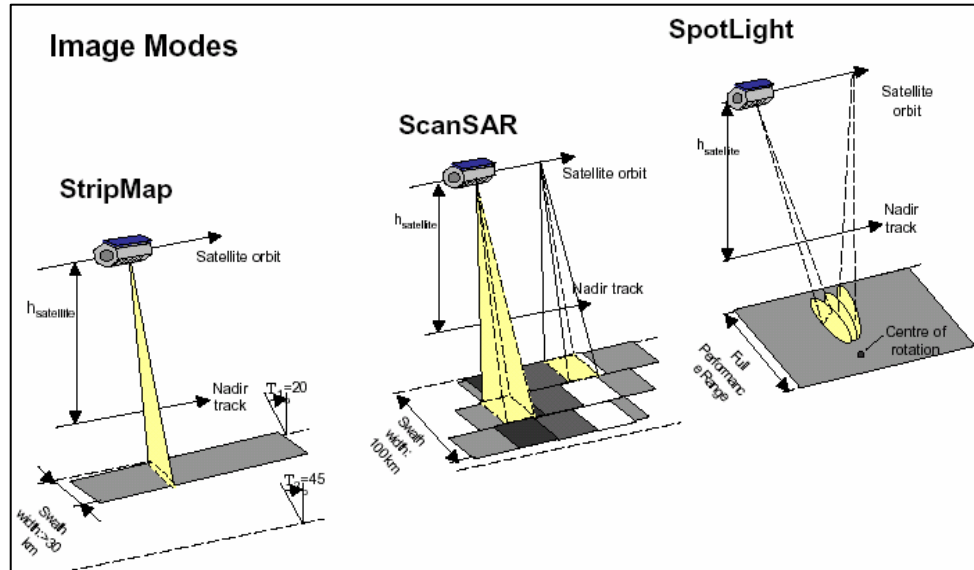


| | |
|---------------------|---|
| Agency | Infoterra, Germany |
| Frequency | X-band |
| Polarization | Single Pol, Dual Pol, Full Pol |
| Ground Resolution | 1 to 16 m |
| Acquisition Modes | Stripmap, ScanSAR and Spotlight |
| Swath | 15 to 60 km |
| Repeat cycle | 11 days |
| Launch | 2007 |
| Further Information | http://www.terrasar.de |





4.8 RADARSAT-2

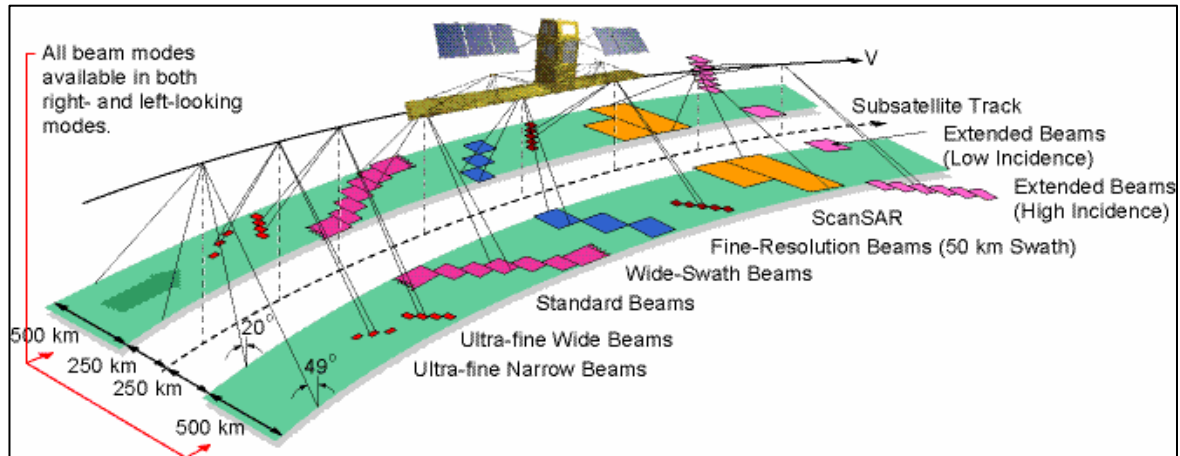


| | |
|---------------------|---|
| Agency | Canadian Space Agency and MacDonald Dettwiler (MDA) |
| Frequency | C-band |
| Polarization | Single Pol, Dual Pol and Full Pol |
| Ground Resolution | 3 to 100 m |
| Acquisition Modes | Stripmap and ScanSAR |
| Swath | 50 to 500 km |
| Repeat cycle | 24 days |
| Launch | 2007 |
| Further Information | http://www.rsi.ca |





4.9 COSMO-SkyMed

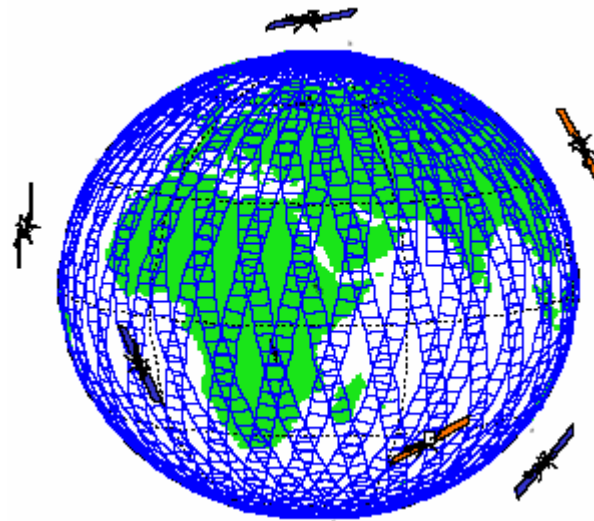


| | |
|-------------------|--|
| Agency | Agenzia Spaziale Italiana (ASI) |
| Frequency | X-band |
| Polarization | Single Pol, Dual Pol, Full Pol |
| Ground Resolution | 1 to 100 m |
| Acquisition Modes | Stripmap, ScanSAR, and Spotlight |
| Swath | 20 to 400 km |
| Repeat cycle | 15 days |
| Launch | 2007 to 2008 - Constellation of 4 satellites |





4.10 RISAT-1

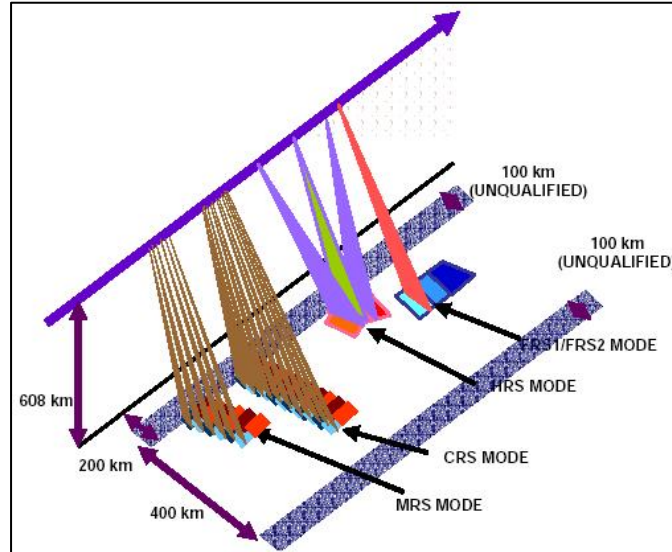

| | |
|---------------------|---|
| Agency | Indian Space Agency |
| Frequency | C-band |
| Polarization | Single Pol, Dual Pol, Full Pol |
| Ground Resolution | 2 to 50 m |
| Acquisition Modes | Stripmap, ScanSAR and Spotlight |
| Swath | 10 to 240 km |
| Repeat cycle | ? days |
| Launch | 2008 |
| Further Information | http://www.isro.org |





4.11 SENTINEL-1

Nearly all European SAR satellite systems currently in orbit have their nominal lifetime terminating in 2008. Continuity of ESA SAR C-band data is vital to ensure effective exploitation of user investment and gaps in data availability will affect on-going monitoring programs.


The following 3 modes - relevant for land applications - are planned:

| | <u>Stripmap</u> | Interferometric <u>ScanSAR</u> | Extra- <u>ScanSAR</u> |
|-----------------------------|-----------------|-----------------------------------|-----------------------|
| Azimuth Resolution (m) | 5 | < 20 | < 80 |
| Ground Range resolution (m) | 4 | < 5 | < 25 |
| Swath (km) | > 80 | > 240 | > 400 |
| Polarization | HH-HV, VV-HV | HH-HV, VV-HV | HH-HV, VV-HV |
| Repeat Cycle (days) | 14 | 14 | 14 |



5. Glossary

Some Basic Terminology

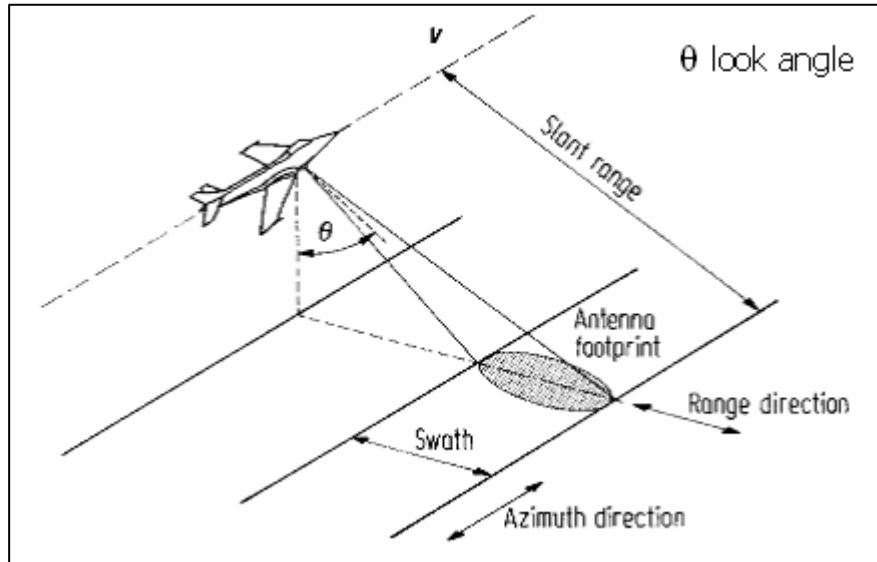

Slant Range

Image direction as measured along the sequence of line-of-sight rays from the radar to each and every reflecting point in the illuminated scene.

Ground Range

Range direction of a side-looking radar image as projected onto the nominally horizontal reference plane, similar to the spatial display of conventional maps.

Range (pixel) spacing

Pixel spacing **across** track

Azimuth (pixel) spacing

Pixel spacing **along** track

Incidence angle




Angle from nadir at which target is viewed

Swath

Width of the imaged scene in the range

5. Glossary

Some Basic Terminology

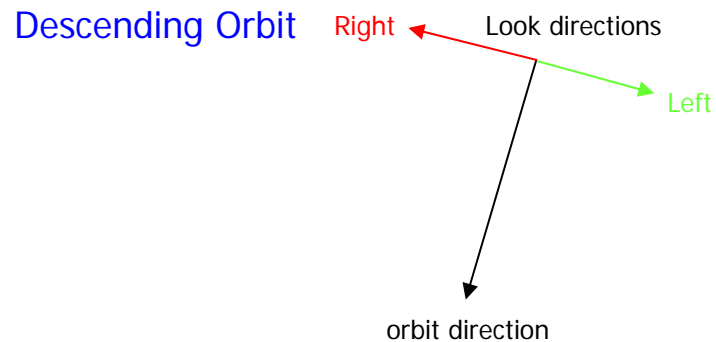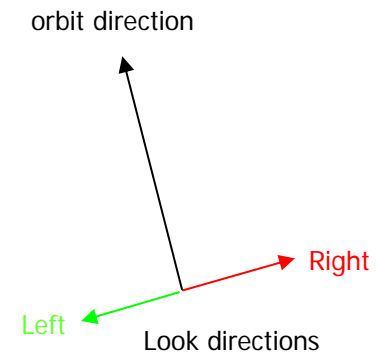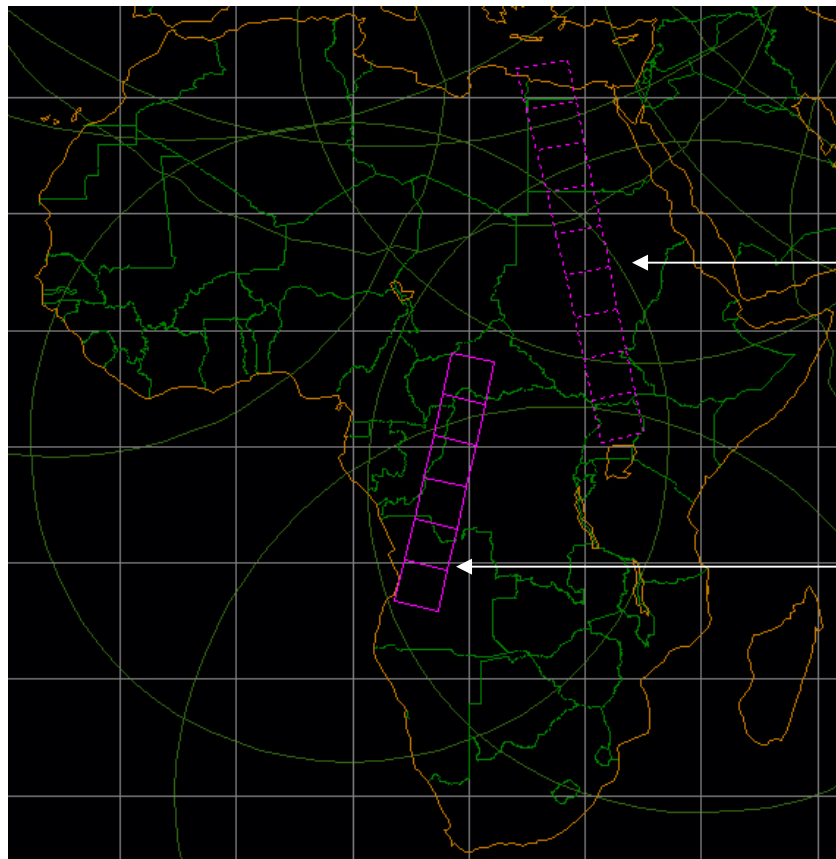

5. Glossary

Across-track - The across-track dimension is the imaging direction of the sensor that is orthogonal to the direction in which the platform is moving.

Active Remote Sensing System - A system that provides its own source of energy and illumination (i.e. radar system). A remote sensing system that transmits its own electromagnetic emanations at an object(s) and then records the energy reflected or refracted back to the sensor.

Along-track - The along-track dimension is the imaging direction of the sensor that is parallel to the direction in which the platform is moving.

Amplitude - Measure of the strength of a signal, and in particular the strength or height of an electromagnetic wave (units of voltage). The amplitude may imply a complex signal, including both magnitude and the phase.

Antenna - Part of the radar system, which transmits and/or receives electromagnetic energy.

Antenna Array - An arrangement of several individual antennas so spaced and phased that their individual contributions add in the preferred direction and cancel in other directions. SAR systems, employ a short physical antenna, but through modified data recording and processing techniques, they synthesise the effect of a very long antenna. The result of this mode of operation is a very narrow effective antenna beamwidth, even at far ranges, without requiring a physically long antenna or a short operating wavelength. For example, in a SAR system, a 2m antenna can be made effectively 600 m long.

Attenuation - Decrease in the strength of a signal. The decrease in the strength of a signal, is usually described by a multiplicative factor in the mathematical description of signal level. A signal is attenuated by application of a gain less than unity. Common causes of attenuation of an electromagnetic wave include losses through absorption and by volume scattering in a medium as a wave passes through.

Azimuth - The relative position of an object within the field of view of an antenna in the plane intersecting the moving radar's line of flight. The term commonly is used to indicate linear distance or image scale in the along-track direction.



5. Glossary

Azimuth Ambiguity - A form of ghosting that occurs when the sampling of returned signals is too slow.

Azimuth Bandpass Filtering - Bandpass filtering selects a certain band of frequency components in the signal. Azimuth bandpass filtering refers to filtering in the azimuth direction of the two-dimensional SAR signal. The location of signal energy in the azimuth frequency domain depends on the antenna pointing angle, so bandpass filtering is necessary to maximize the signal energy in the processed image.

Azimuth Compression - In the SAR signal domain, the raw data is spread out in the range and azimuth directions and must be coherently compressed to realise the full-resolution potential of the instrument. Azimuth compression consists of coherently correlating the received signal with the azimuth replica function. The appropriate Hamming weighting is applied also to the reference function. Subsequent correlation has the effect of modulating both signal and noise by similar amounts and hence the signal-to-noise ratio is unchanged by this process.

Azimuth Resolution - Resolution characteristic of the azimuth dimension, usually applied to the image domain. Azimuth resolution is fundamentally limited by the Doppler bandwidth of the system. Excess Doppler bandwidth is usually used to allow extra looks, at the expense of azimuth resolution.

Azimuth Time - The time along the flight path.

Backscatter - It is the portion of the outgoing radar signal that the target redirects directly back towards the radar antenna.

Backscattering is the process by which backscatter is formed. The scattering cross section in the direction toward the radar is called the backscattering cross section; the usual notation is the symbol σ . It is a measure of the reflective strength of a radar target. The normalised measure of the radar return from a distributed target is called the backscatter coefficient, or σ nought, and is defined as per unit area on the ground. If the signal formed by backscatter is undesired, it is called clutter. Other portions of the incident radar energy may be reflected and scattered away from the radar or absorbed.



5. Glossary

Band - A selection of wavelengths or range of radar frequencies.

Bandwidth -A measure, according to a standard definition (see width), of the span of frequencies available in a signal or other distribution, or of the frequency limiting stages in the system. Typical bandwidths in the range channel of a SAR are on the order of 20 Megahertz, and in the azimuth channel are on the order of 1 Kiloherzt. Bandwidth is a fundamental parameter of any imaging system, and determines the ultimate resolution available. For any pulse, the basic parameter that describes its structure is the time bandwidth product.

Beam - A focused pulse of energy. The antenna beam of a side-looking radar (SLAR) is directed perpendicular to the flight path and illuminates a swath parallel to the platform ground track. Due to the motion of the satellite, each target element is illuminated by the beam for a period of time, known as the integration time.

Beam Mode - The SAR operating configuration defined by the swath width and resolution.

Beta Nought (β°) - A radar brightness coefficient. The reflectivity per unit area in slant range is dimensionless.

Brightness - Property of an image in which the strength of the radar reflectivity is expressed as being proportional to a digital number (digital image file) or to a grey scale (photographic image), which for a photographic positive shows bright as white. The attribute of visual perception in accordance with which an area appears to emit more or less light. Brightness may be a result of variations in tone, texture, or in the case of radar imagery, radar artefacts. The topography and surface roughness of the terrain will affect the image brightness. Where the local incidence angle is large, the image will be dark. Conversely, the image will be brighter where the local incidence angle is small.

C-Band - A nominal frequency range, from 8 to 4 Ghz (3.75 to 7.5 cm wavelength) within the microwave portion of the electromagnetic spectrum. C-band has been the frequency of choice for several experimental aircraft SAR systems as well as a series of single-band satellite SAR systems, including the ERS-1/2 and Envisat SAR systems and RADARSAT-1/2 SAR. The corresponding wavelength for these systems is on the order of 5.6 cm, which has been found useful in sea ice surveillance as well as in other applications. Its penetration capability with regard to vegetation canopies or soils is limited and is restricted to the top layers.



5. Glossary

Calibration - Process whereby one may relate the digital numbers describing an image to physical quantities such as reflectivity, geometry (position or size), or phase.

Chirp - Typical phase coding or modulation applied to the range pulse of an imaging radar designed to achieve a large time-bandwidth product. The resulting phase is quadratic in time, which has a linear derivative. Such coding is often called linear frequency modulation (FM).

Chirp Compression - The echo signal is correlated with a suitable reference function. This correlation is performed in the frequency domain after suitable Fast Fourier Transform from the time domain. The reference function of interest should represent the chirp signal which illuminates the target.

Coherence - Coherence is the magnitude of an interferogram's pixels, divided by the product of the magnitudes of the original image's pixels. It is usually calculated on a small window of pixels at a time, from the complex interferogram and images. It ranges from 0.0, where there is no useful information in the interferogram; to 1.0, where there is no noise in the interferogram. Coherence can serve as a measure of the quality of an interferogram; tell you more about the surface type (vegetated vs. rock); or tell you when a tiny, otherwise invisible change has occurred in the image, and it is only visible in the phase image of an interferogram.

Complex Number - For radar systems, a complex number implies that the representation of a signal, or data file, needs both magnitude and phase measures. In the digital SAR context, a complex number is often represented by an equivalent pair of numbers, the real in-phase component (I) and the imaginary quadrature component (Q). For coherent systems such as SAR, the role of complex numbers is an essential part of the signal, since signal phase is used in the processor to obtain high-resolution.

Co-polarisation Signature - The received signature when the transmit and receive antennas have the same polarisation properties.

Corner Reflector - A combination of two or more intersecting specular surfaces that combine to enhance the signal reflected in the direction of the radar. The strongest reflection is obtained for materials having a high conductivity (i.e. ships, bridges).

Cross Polarisation Signature - The received signature when the transmit and receive antennas have orthogonal polarisations.



5. Glossary

Decibel (dB) - Measurement of signal strength, properly applied to a ratio of powers. Decibels often are used in radar, such as in measures of reflectivity, for which the dynamic range may span several factors of ten.

Depolarisation - The polarisation state of an electromagnetic wave can change when the wave scatters from a target. Depolarisation is a measure of the change in the degree of polarisation of a partially polarised wave upon scattering. For example, a target may scatter a wave with a greater degree of polarisation than the incident wave, in which case the depolarisation is negative. Depolarisation is also used to indicate spatial or temporal variation of the degree of polarisation for a completely polarised wave.

Depression Angle - Usually refers to the line of sight from the radar to an illuminated object as measured from the horizontal plane at the radar. For image interpretation, use of the term is not recommended because it does not account for the effects of Earth curvature, and it does not conveniently include effects of local slope in the scene. It is more appropriate for engineering description of the vertical antenna pattern at the radar itself.

Detection - Processing stage at which the strength of the signal is determined for each pixel value. Detection removes phase information from the data file. The preferred detection scheme uses a magnitude squared method, which is energy conserving, and has units of voltage squared per pixel.

Doppler Frequency - The Doppler frequency depends on the component of satellite velocity in the line-of-sight direction to the target. This direction changes with each satellite position along the flight path, so the Doppler frequency varies with azimuth time. For this reason, azimuth frequency is often referred to as Doppler frequency.

Dielectric - Material which has neither "perfect" conductivity nor is perfectly "transparent" to electromagnetic radiation. The electrical properties of all intermediate materials, such as ice, natural foliage, or rocks, may be described by two quantities relative dielectric constant; and loss tangent. Reflectivity of a smooth surface and the penetration of microwaves into the material are determined by these two quantities.

Dielectric Constant - Fundamental (complex) parameter, also known as the complex permittivity, that describes the electrical properties of a lossy medium. (See permeability.) By convention, the relative dielectric constant of a given material is used, defined as the (absolute) dielectric constant divided by the dielectric constant of "free space".



5. Glossary

Dihedral - Corner reflector formed by two surfaces orthogonally intersecting. For enhanced backscatter, the dihedral must be open to the radar, and have the axis of intersection at right angles to the direction of illumination.

Distributed Scatters -Elements of a scene consisting of many small scatterers of random location, phase, and reflectivity in each resolution cell.

Elliptical Polarisation - A polarisation state in which the two perpendicular components of the electric field have unequal magnitudes and a non-zero phase difference. In this case, the tip of the electric field vector traces an ellipse on a plane that is transverse to the wave propagation direction.

Foreshortening - Spatial distortion whereby terrain slopes facing a side-looking radar's illumination are mapped as having a compressed range scale relative to its appearance if the same terrain were level. Foreshortening is a special case of elevation displacement. The effect is more pronounced for steeper slopes, and for radars that use steeper incidence angles. Range scale expansion, the complementary effect, occurs for slopes that face away from the radar illumination.

Frequency - Number of oscillations per unit time or number of wavelengths that pass a point per unit time. Rate of oscillation of a wave. In remote sensing, this term is most often used with radar. The frequency bands used by radar (radar frequency bands) were first designated by letters for military secrecy. In the microwave region, frequencies are on the order of 1 GHz (Gigahertz) to 100 GHz. ("Giga" implies multiplication by a factor of a billion). For electromagnetic waves, the product of wavelength and frequency is equal to the speed of propagation, which, in free space, is the speed of light.

Frequency Modulation - A technique in which the frequency of a signal is changed about a fundamental or carrier frequency.

Geocoding (or Georeferencing or Ortho-rectification) -The process to transform an image from slant range projection to a cartographic reference system considering ellipsoidal height or a Digital Elevation Model.

Ground Range - Range direction of a side-looking radar image as projected onto the nominally horizontal reference plane, similar to the spatial display of conventional maps. For spacecraft data, an Earth geoid model is used, whereas for airborne radar data, a planar approximation is sufficient. Ground range projection requires a geometric transformation from slant range to ground range, leading to relief or elevation displacement, foreshortening, and layover unless terrain elevation information is used.



5. Glossary

Ground Range - Range direction of a side-looking radar image as projected onto the nominally horizontal reference plane, similar to the spatial display of conventional maps. For spacecraft data, an Earth geoid model is used, whereas for airborne radar data, a planar approximation is sufficient. Ground range projection requires a geometric transformation from slant range to ground range, leading to relief or elevation displacement, foreshortening, and layover unless terrain elevation information is used.

Horizontal Polarisation - Linear polarisation with the lone electric vector oriented in the horizontal direction in antenna co-ordinates.

Incidence Angle - Angle between the line of sight from the radar to an element of an imaged scene, and a vertical direction characteristic of the scene. The definition of "vertical" for this purpose is important. One must distinguish between the (nominal) "incidence angle" determined by the large scale geometry of the radar and the Earth's geoidal surface, and the local incidence angle which takes into account the mean slope with each pixel of the image. Smaller incidence angle refers to viewing line of sight being closer to the (local) vertical, hence "steeper". In general, reflectivity from distributed scatterers decreases with increasing incidence angle.

Intensity - Strength of a field or of a distribution, such as an image file, proportional to magnitude, squared (see Power).

Interferometric Synthetic Aperture Radar (InSAR) - SAR interferometry is a technique involving phase measurements from successive satellite SAR images to infer differential range and range changes for the purpose of detecting very subtle changes on, or of, the Earth surface with unprecedented scale, accuracy and reliability. SAR interferometry has been demonstrated successfully in a number of applications, including topographic mapping, measurement of terrain displacement as a result of earthquakes, and measurement of flow rates of glaciers or large ice sheets. The term InSAR, is most commonly associated with repeat-pass interferometry.

Interferometry - A technique that uses the measured differences in the phase of the return signal between two satellite passes to detect slight changes on the Earth's surface. The combination of two radar measurements of the same point on the ground, taken at the same time, but from slightly different angles, to produce stereo images. Using the cosine rule from trigonometry to calculate the distance between the radar and the Earth's surface, these measurements can produce very accurate height maps, or maps of height changes. Mapping height changes provides information on earthquake damage, volcanic activity, landslides, and glacier movement.



5. Glossary

L-Band - A nominal frequency range, from 1 to 3 GHz (30 to 10 cm wavelength) within the microwave portion of the electromagnetic spectrum. L-band has been the frequency of choice for several experimental aircraft SAR systems as well as a series of single-band satellite SAR systems, including the SEASAT SAR and JERS-1 SAR systems. The corresponding wavelength for these systems is on the order of 23.5 cm, which has been found useful in sea ice surveillance as well as in other applications. Its penetration capability with regard to vegetation canopies is significant.

Layover - Extreme form of elevation displacement or foreshortening in which the top of a reflecting object (such as mountain) is closer to the radar (in slant range) than are the lower parts of the object. The image of such a feature appears to have fallen over towards the radar. The effect is more pronounced for radars having smaller incidence angle.

Linear Polarisation - A polarisation state in which one of the perpendicular components of the electric field has zero magnitude. In this case, the polarisation ellipse collapses to a straight line; the tip of the electric field vector traces a straight line on a plane that is transverse to the wave propagation direction.

Looks - It refers to individual looks as groups of signal samples in a SAR processor that splits the full synthetic aperture into several sub-apertures, each representing an independent look of the identical scene. The resulting image formed by incoherent summing of these looks is characterised by reduced speckle and degraded spatial resolution. The SAR signal processor can use the full synthetic aperture and the complete signal data history in order to produce the highest possible resolution, albeit very speckled, single-look complex (SLC) SAR image product. Multiple looks may be generated by averaging over range and/or azimuth resolution cells. For an improvement in radiometric resolution using multiple looks there is an associated degradation in spatial resolution. Note that there is a difference between the number of looks physically implemented in a processor, and the effective number of looks as determined by the statistics of the image data.

Magnitude - One of three parameters required to describe a wave. Magnitude is the amplitude of the wave irrespective of the phase. For a complex signal described by in-phase (I) and quadrature (Q) components, the magnitude is given by $\sqrt{I^2+Q^2}$. For complex amplitude A , magnitude is, by definition, $|A|$.



5. Glossary

Microwave - A very short electromagnetic wave. The portion of the electromagnetic spectrum lying between the far infrared (IR) and the conventional radio frequency portion. While not bounded by definition, it is commonly regarded as extending from 1 mm to 1 m in wavelength (300 GHz to 0.3 GHz frequency). Passive systems operating at these wavelengths sometimes are called microwave systems. Active systems are called radar, although the literal definition of radar requires a distance measuring capability not always included in active systems.

Monostatic Radar - A monostatic radar system transmits and receives its energy through the same antenna system or through collocated antennas.

Motion Compensation - Adjustment of a sensing system and/or the recorded data to remove effects of platform motion, including rotation and translation, and variations in along-track velocity. Motion compensation is essential for aircraft SARs, but usually is not needed for spacecraft SARs.

Multi-look - See Looks

Multifrequency Radar - Broadband systems that transmit pulses in a range of frequencies and wavelengths.

Multipolarisation Radar - A radar capable of simultaneously and coherently acquiring several independent complex polarisation measurements for every pixel in the image.

P-Band - A frequency range from 0.999 to 0.2998 GHz (30 to 100 cm wavelength) within the microwave (radar) portion of the electromagnetic spectrum. P-band is an experimental SAR frequency that has only been used to-date for research and development purposes. It is part of the NASA JPL AIRSAR multi-frequency (C-, L- & P-band) SAR system designed for Earth observation experiments. P-band is not hindered by atmospheric effects and is capable of seeing through heavy rain showers. P-band SAR penetration capabilities are very significant with regard to vegetation canopies, glacier or sea ice, and soil.

Phased Array Radar - A phased array radar uses an antenna that consists of an array of antenna elements along with signal processing that allows the antenna to be steered electronically.

Phase Preserving - When the phase at the peak is correct, the processing algorithm is referred to as phase preserving, regardless of the phase variation across the impulse response.



5. Glossary

Phase Unwrap - In SAR interferometry, the phase delay of the carrier signal at a certain point in the interferogram is a function of the terrain height at that point. However, the phase of the carrier signal can only be measured to within one cycle, or 360 degrees. Phase unwrapping refers to converting the measured phase to the absolute phase, by adding the appropriate number of cycles, or multiple of 360 degrees, to the measured phase.

Polarimetric Active Radar Calibrator (PARC) - Device used to receive and retransmit radar pulses. These devices usually consist of a polarisation sensitive receive and transmit antenna and a stable amplifier which boosts the signal level so that the device being calibrated receives a high signal of a given polarisation.

Polarimetric Radar - A radar which permits measurement of the full polarisation signature of every resolution element.

Polarisation - Orientation of the electric (E) vector in an electromagnetic wave, frequently "horizontal" (H) or "vertical" (V) in conventional imaging radar systems. Polarization is established by the antenna, which may be adjusted to be different on transmit and on receive. Reflectivity of microwaves from an object depends on the relationship between the polarization state and the geometric structure of the object. Common shorthand notation for band and polarization properties of an image file is to state the band, with a subscript for the receive and the transmit state of polarization, in that order.

Polarisation Ellipse - For an elliptically polarised wave, the tip of the electric field vector traces an ellipse on a plane that is transverse to the wave propagation direction. This polarisation ellipse describes the polarisation properties of the electromagnetic waves, including the ratio of the perpendicular electric field components and their relative phases.

Power - Strength of a field or of a distribution, such as an image file, proportional to magnitude, squared (see Intensity).

Pulse - A short burst of electromagnetic radiation transmitted by the radar. Also described as a group of waves with a distribution confined to a short interval of time. Such a distribution is described in the time domain, or in spatial dimensions, by its width and its amplitude or magnitude, from which its energy may be found. In radar, use is made of modulated or coded pulses which must be processed to decode or compress the original pulse to achieve the impulse response observed in the image.



5. Glossary

Pulse Repetition Frequency (PRF) - Rate of recurrence of the pulses transmitted by a radar.

Radar Antenna -The radar antenna is a structure for transmitting and receiving radiated energy; it is an important subsystem that defines, to a great extent, a radar's operational capabilities and cost. In radar remote sensing the main function of the antenna is to concentrate a radiated microwave energy into a beam of required shape, referred to as the antenna pattern, to transmit it into the desired direction (look direction), and to receive the returned energy from surfaces or objects. Radar remote sensing antennas provide scene illumination.

Radar Cross Section (RCS) - Measure of radar reflectivity. The Radar Cross Section (RCS) is expressed in terms of the physical size of an hypothetical uniformly scattering sphere that would give rise to the same level of reflection as that observed from the sample target.

Radar Equation - Mathematical expression that describes the average received signal level (or, sometimes, the image signal level), compared to the additive noise level, in terms of system parameters. Principal parameters include transmitted power, antenna gain, noise power, and radar range. The range effect is sometimes called the spreading factor, since effective power decreases significantly with a small increase in range. All else equal, the power received by a SAR per image pixel is proportional to R^3 .

Radio Echo - The signal reflected by a radar target, or the trace produced by this signal on the screen of the cathode-ray tube in a radar receiver.

Radiometric Resolution - The expected spread of variation in each estimate of scene reflectivity as observed in an image. Smaller radiometric resolution is "better". Radiometric resolution for a given radar may be improved by averaging, but at the cost of spatial resolution.

Radiometer - An instrument for quantitatively measuring the intensity of electromagnetic radiation in some band of wavelengths in any part of the electromagnetic spectrum. Usually used with a modifier, such as an infrared radiometer or a microwave radiometer.



5. Glossary

Radiometric Calibration - The process to radiometrically calibrate SAR data considering the Antenna Gain Pattern, Range Spread Loss and Scattering area according to the Radar Equation.

Range Resolution - Resolution characteristic of the range dimension, usually applied to the image domain, either in the slant range plane or in the ground range plane. Range resolution is fundamentally determined by the system bandwidth in the range channel.

Range Time - The fast time within a received pulse, relative to the pulse transmission time.

Raw Data - Raw data are data as received from the SAR system.

Reflectivity - Property of illuminated objects to reradiate a portion of the incident energy. Reflectivity, in general, is larger in the specular direction for smaller surface roughness. For side looking radars, backscatter is the observable portion of the energy reflected. Backscatter, in general, is increased by greater surface roughness. In general, reflectivity is increased for higher conductivity of the scattering surface. The relative strength of radar reflectivity is tabulated by sigma, for discrete objects, and by sigma nought for natural terrain surfaces.

Repeat Pass Interferometry - Method based on two image acquisitions of the same scene from slightly displaced orbits of a satellite. Phase information of the two image data files are superimposed. The two phase values at each pixel are then subtracted, leading to an interferogram that records only the differences in phase between the two original images. Phase differences can be related to the altitude variation at each position in the swath and enable the production of a Digital Elevation Model (DEM). For optimum results, there should be no change in the backscatter to maintain coherence; vegetated sites are therefore a problem. For detection of feature movement (e.g. tracking glaciers) orbits should be as close as possible. And knowledge of the sensor location is critical. With a good baseline and coherence, this technique can be better than stereo (~10 m vertical accuracy).

Resolution - Generally (but loosely) defined as the width of the "point spread function", the "Green's function", or the "impulse response function", depending on whether one has an optics, a physics, or an electronic systems background. More properly, "resolution" refers to the ability of a system to differentiate two image features corresponding to two closely spaced small objects in the illuminated scene when the brightness of the two objects in question are comparable and fall within the dynamic range of the radar in question. (Definition adapted from Lord Rayleigh [1879]). "Higher resolution" refers to a system having a smaller impulse response width.



5. Glossary

Resolution Cell - A three-dimensional cylindrical volume surrounding each point in the scene. The cell range depth is slant range resolution, its width is azimuth resolution, and its height, which is conformal to the illumination wavefront, is limited only by the vertical beam width of the antenna pattern. Resolution cell often is defined with respect to the local horizontal.

SAR Focusing - In a long synthetic aperture (array), SAR focusing involves the removal and compensation of path length differences from the antenna to the target on the ground. The main advantage of a focused synthetic aperture is that it increases its array length over those radar signals that can be processed, and thus increases potential SAR resolution at any range. SAR focusing is a necessary process when the length of a synthetic array is a significant fraction of the range to ground being imaged, as the lines-of-sight (range) from a particular point on the ground to each individual element of the array differ in distance. These range differences, or path length differences, of the radar signals can affect image quality. In a focused SAR image these phase errors can be compensated for by applying a phase correction to the return signal at each synthetic aperture element. Focusing errors may be introduced by unknown or uncorrected platform motion. In an unfocused SAR image, the usable synthetic aperture length is quite limited.

S-Band - A nominal frequency range from 4 to 2 GHz (7.5 to 15 cm wavelength) within the microwave (radar) portion of the electromagnetic spectrum. S-band radars are used for medium-range meteorological applications, for example rainfall measurements, as well as airport surveillance and specialised tracking tasks.

Scanning Synthetic Aperture Radar (ScanSAR) - Having the capability to illuminate several subswaths by scanning its antenna off-nadir into different positions.

Sensitivity Time Control (STC) - Pre-programmed change in radar amplitude due to weaker backscatter from greater ranges and varying incidence angles across the imaged swath.

Shadow - From an optical point of view as seen from the position of a radar, a region hidden behind an elevated feature in the scene would be out of sight. This region corresponds to that which does not get illuminated by the radar energy, and thus is also not visible in the resulting radar image. The region is filled with "no reflectivity", which appears as small digital numbers, or a dark region in hard copy.



5. Glossary

Sidelobes - Non-zero levels in a distribution that are separated from the desired central response. Sidelobes arise naturally in antenna patterns, for example, although in general they are a nuisance, and must be suppressed as much as possible. Large sidelobes may lead to unwanted multiple images of a single feature.

sigma (σ) - The conventional measure of the strength of a radar signal reflected from a geometric object (natural or manufactured) such as a corner reflector. Sigma specifies the strength of reflection in terms of the geometric cross section of a conducting sphere that would give rise to the same level of reflectivity. (Units of area, such as metres squared). (See radar cross section.)

sigma nought (σ^0) - Scattering coefficient, the conventional measure of the strength of radar signals reflected by a distributed scatterer, usually expressed in dB. It is a normalized dimensionless number, comparing the strength observed to that expected from an area of one square metre. Sigma nought is defined with respect to the nominally horizontal plane, and in general has a significant variation with incidence angle, wavelength, and polarization, as well as with properties of the scattering surface itself.

Slant Range - Image direction as measured along the sequence of line-of-sight rays from the radar to each and every reflecting point in the illuminated scene. Since a SAR looks down and to the side, the slant range to ground range transformation has an inherent geometric scale which changes across the image swath.

Speckle - Statistical fluctuation or uncertainty associated with the brightness of each pixel in the image of a scene. A single look SAR system achieves one estimate of the reflectivity of each resolution cell in the image. Speckle may be reduced, at the expense of resolution, in the SAR processor by using several looks. Speckle appears as a multiplicative random process whose variance and spatial correlation are determined primarily by the SAR system.

Synthetic Aperture - A synthetic aperture, or virtual antenna, consists of a long array of successive and coherent radar signals that are transmitted and received by a physically short (real) antenna as it moves along a predetermined flight or orbital path. The synthetic aperture is formed by pointing the real radar antenna of relatively small dimensions, which are restricted in size by the satellite platform, broadside to the direction of forward motion of that platform. The points at which successive pulses are transmitted can be thought of as the elements of a long synthetic array, which a signal processor will then use and process to generate a SAR image. This detailed array of radar signal data is the key to achieving high azimuth resolution. This long virtual antenna concept is the basis for synthetic aperture radar, or SAR.



5. Glossary

Synthetic Aperture Radar (SAR) - A synthetic aperture radar, or SAR, is a coherent radar system that generates high-resolution remote sensing imagery. Signal processing uses magnitude and phase of the received signals over successive pulses from elements of a synthetic aperture to create an image. As the line of sight direction changes along the radar platform trajectory, a synthetic aperture is produced by signal processing that has the effect of lengthening the antenna. The achievable azimuth resolution of a SAR is approximately equal to one-half the length of the actual (real) antenna and does not depend on platform altitude (distance). High range resolution is achieved through pulse compression techniques. In order to map the ground surface the radar beam is directed to the side of the platform trajectory; with a sufficiently wide antenna beam width in the along-track direction, an identical target or area may be illuminated a number of times without a change in the antenna look angle.

Stokes Matrix - 4x4 array of real numbers that describes the transformation of the Stokes parameters of the incident wave into the Stokes parameters of the electromagnetic wave reflected by each element of a scene illuminated by a radar. The Stokes matrix describes the complete polarization signature of the reflective medium.

Stokes Parameters - Set of four real numbers that together describe the state of polarization of an electromagnetic wave.

Swath - Width of the imaged scene in the range dimension, measured either in ground range or in slant range.

Texture - Second order spatial average of brightness. Scene texture is the spatial variation of the average reflectivity. For areas of nominally constant average reflectivity, image texture consists of scene texture multiplied by speckle.

Tone - First order spatial average of image brightness, often defined for a region of nominally constant average reflectivity.

Transmission - Energy sent by the radar, normally in the form of a sequence of pulses, to illuminate a scene of interest.

Trihedral - Corner reflector formed from three mutually orthogonal surfaces.

Volume Scattering - Multiple scattering events occurring inside a medium, generally neither dense nor having a large loss tangent, such as the canopy of a forest. The relative importance of volume scattering is governed by the dielectric properties of the material.



5. Glossary

Vertical Polarisation - Linear polarisation with the lone electric vector oriented in the vertical direction in antenna co-ordinates.

Wavelength - In a periodic wave, the distance between two points of corresponding phase in consecutive cycles

X-Band - A nominal frequency range from 12.5 to 8 GHz (2.4 to 3.75 cm wavelength) within the microwave (radar) portion of the electromagnetic spectrum. X-band is a suitable frequency for several high-resolution radar applications and has often been used for both experimental and operational airborne SAR systems, designed for military as well as civilian remote sensing applications. The corresponding wavelength for these systems is on the order of 3 cm, which has been found useful for mapping and surveillance tasks.

Zero Doppler Time - It is the along-track (azimuth) time at which a target on the ground would have a Doppler shift of zero with respect to the satellite (i.e. when the target was perpendicular to the flight path). Also called the closest approach azimuth time.



6. References

Carrara W., R. Goodman, and R. Majewsky, Spotlight Synthetic Aperture Radar: Signal Processing Algorithms, Artech House, 1985. - [Advanced](#)

Curlander J.C. and R.N. McDonough, Synthetic Aperture Radar: Systems and Signal Processing, Wiley-Interscience, November, 1991. - [Advanced](#)

Dixon T. (Editor), SAR Interferometry and Surface Change Detection, Report of a Workshop held in Boulder, 1995, <http://southport.jpl.nasa.gov/science/dixon>. - [Basic](#)

Elachi C., T. Bicknell, R. Jordan, and C. Wu, Spaceborne Synthetic Aperture Imaging Radars: Application, Techniques, and Technology, IEEE Vol. 70, October 1982. - [Basic](#)

ESA, ASAR product handbook, <http://www.envisat.esa.int/dataproducts>. - [Basic](#)

ESA, Polarimetric SAR Interferometry, <http://earth.esa.int/polinsar/> - [Advanced](#).

Henderson F. and Lewis A. (Editors), Manual of Remote Sensing, Volume 2, Principles and Applications of Imaging Radar, ISBN: 0-471-33046-9, 1998. - [Basic](#)

Hovaneessian S., Introduction to synthetic array and imaging radar, Artech House, 1980. - [Basic](#)

Massonnet D. and K. Feigl, Radar interferometry and its applications to changes in the Earth's surface, Review of Geophysics, 36/4, 1998. (http://www.ingv.it/barba/igl/2003/Massonnet_98.pdf) - [Basic to Advanced](#)



6. References

Oliver C. and S. Quegan, Understanding Synthetic Aperture Radar Images, ArtechHouse, 1998. - [Basic to Advanced](#)

Olmert C., Alaska SAR Facility Scientific SAR User's Guide, <http://www.asf.alaska.edu/SciSARuserGuide.pdf> - [Basic](#)

Schreier G. (Editor), SAR Geocoding: Data and Systems, Wichmann, 1993. - [Basic to Advanced](#)

Ulaby F.T., R. Moore, and A.K. Fung, Microwave Remote Sensing (Volume 1,2,3), Addison Wesley, Reading (MA), 1981, 1982, 1986. - [Advanced](#)

Ulaby F.T. and C. Elachi (Editors), Radar Polarimetry for Geoscience Applications, Artech House, Nordwood, 1989. - [Advanced](#)

For a complete reference list refer to http://southport.jpl.nasa.gov/science/SAR_REFS.html



© 2007 CREASO GmbH. All rights reserved.
SARscape® is a registered trademark of sarmap s.a. Switzerland.
ENVI and IDL are registered trademarks of ITT Corporation.

